

518-6

7-14-67

4/3

ACCEPTED
 7-14-67
 518-6
 UNDER THE FEDERAL INSPECTION
 SERVICE ACT OF 1906
 FOR EQUIVALENTS OF
 ED UNLESS OTHERWISE SPECIFIED
 TO ATTACHED COMMENTS.



5 U.S. GAL. LIQ.

clear

CUPRINOL® WOOD PRESERVATIVE

STOPS ROT • PREVENTS TERMITES

WATER REPELLENT • QUICK DRYING

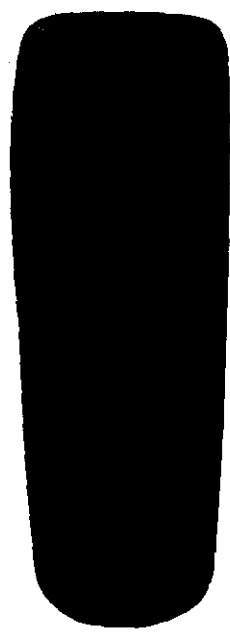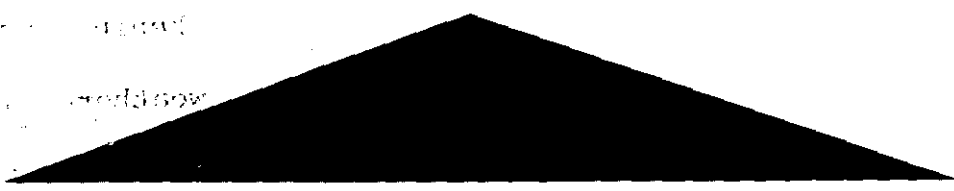

ACTIVE INGREDIENTS:
 Zinc Naphthenate 24.00%
 (equivalent to metallic zinc 2%)
 Dieldrin*50%
 INERT INGREDIENTS 75.50%
 Total 100.00%

*0.43% Hexachloroepoxyoctahydroendo, exo-dimethano-naphthalene and 0.07% related compounds.

WARNING: KEEP OUT OF REACH OF CHILDREN.
 READ CAUTIONS ON BACK. USDA Reg. No. 518-6

CLEAR

2/3

CUPRINOL® is world famous for prolonging the life and performance of wood by reducing rot, termite damage, mildew, warping and swelling. CUPRINOL greatly reduces the probability of paint peeling. Any paint, stain, varnish or clear finish may be applied over CLEAR CUPRINOL. Drying time of paints may be increased somewhat. Wood treated with CUPRINOL will not harm plants after drying.

CLEAR CUPRINOL will prevent black fungus spots on wood and protect against weakening due to rot without interfering with a natural weathered look.

CUPRINOL Preservative Stains are recommended wherever color is desired. CUPRINOL BROWN, REDWOOD and GRAY stains preserve wood and beautify the rich natural grain with attractive colors. GREEN CUPRINOL is recommended for wood in contact with the soil or under copper bottom paint.

CAUTION: COMBUSTIBLE MIXTURE

NYFD Certificate of Acceptance No. 3799.

Use in a well-ventilated place. Avoid fire, flame, sparks or heaters.

DIRECTIONS

Apply by brush, roller, spray or dip to clean bare wood. Use one generous coat under finishes. When no finish is to be used, two generous coats applied within 10 minutes, or a 3-minute dip is recommended. The more

preservative absorbed by the wood, the longer and more effective the protection. CUPRINOL dries to the touch rapidly. Clean excess CUPRINOL from surface with mineral spirits and let dry approximately 24 hours before applying paint or finish.

Clean CUPRINOL from hands, brushes, etc. with mineral spirits or turpentine.

COVERAGE: 400 sq. ft. per gallon average, depending on wood porosity and surface roughness.

WARNING: Harmful if swallowed, inhaled or absorbed through skin. Avoid breathing vapor or spray mist. Avoid contact with skin, eyes or clothing. In case of contact with skin or eyes, flush with plenty of water; for eyes, get medical attention. Wash with soap and water after handling and before eating or smoking; wash clothing before reuse. Avoid contamination of feed and foodstuffs. Keep out of reach of children. To protect fish and wildlife, do not contaminate streams, lakes or ponds with this material.

BY THE MAKERS OF:

POLYSEAMSEAL® Adhesive Caulk

DARWORTH LATEX CAULK

TM-4® Washaway Paint Remover

EVEN-EVEN® Stains

STAT® Brush Keeper

WARNING READ CAUTIONS ON BAC