

\*

# CUPRINOL® WOOD PRESERVATIVE



# CUPRINOL® WOOD PRESERVATIVE

CUPRINOL prolongs the life of wood by preventing rot and termite attack. This grade should be used only for dipping greenhouse lumber, flats, etc. After drying, CUPRINOL treated wood will not harm plants or domestic animals.

## CAUTION: COMBUSTIBLE MIXTURE

N.Y.F.D. Certificate of Approval No. 3799

Use in a well-ventilated place. Avoid fire, flame, sparks, or heaters.

### DIRECTIONS

Wood must be clean, dry and free from bark or paint. Apply two flowing coats by brush, roller or dip to untreated wood. Wood to be dipped should be immersed for at least 3 minutes to give adequate protection, and no protective clothing is required unless the user is allergic to petroleum distillates.

Allow a minimum of two to four hours drying time before applying any finish. When treating flats for use with extremely small seeds, be sure to dry thoroughly to avoid seed injury.

Clean CUPRINOL from hands, clothes, etc. with mineral spirits or kerosene.

**COVERAGE:** 300 sq. ft. per gallon of mixture when applied to wood perpendicular surface in pines.


**WARNING:** Harmful if swallowed. Avoid breathing vapors or mist. Avoid contact with skin and eyes. Wash thoroughly after use. Keep out of reach of children.

### BY THE MAKERS OF:

PARWORTH PANEL ADHESIVE  
1740 W. Commercial Blvd., Pompano, Fla.

ROY E. AMERSON, Albany, O.  
PARWORTH PALEX COMPANY

NEW YORK, N.Y. 10011

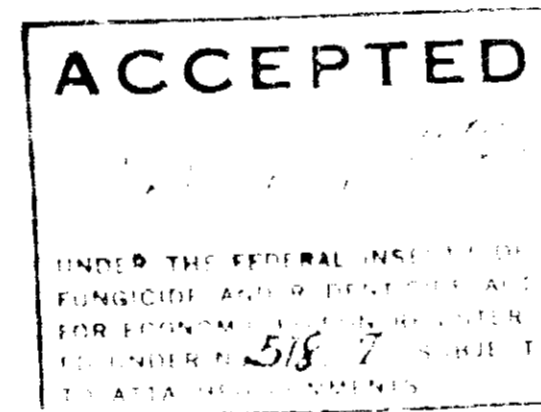

ACTIVE INGREDIENTS	80.00% minimum
Copper Naphthenate (equivalent to metallic copper 2%)	
INERT INGREDIENTS	80.00% maximum
Total	100.00%

**WARNING:** KEEP OUT OF REACH OF CHILDREN  
DO NOT USE IN OPEN FLAMES OR NEAR FIRE

\*NOT A STAIN. COLOR IS FROM FUNGICIDE ONLY.

## 5 GALLONS