


**NEW  
AND  
IMPROVED!**

# CUPRINOL®

# CLEAR WOOD PRESERVATIVE

Penetrates to protect against mildew and rot.

**NEW  
IMPROVED  
FORMULA!**  
Do not  
use or mix  
with products  
that do not  
have this  
label.

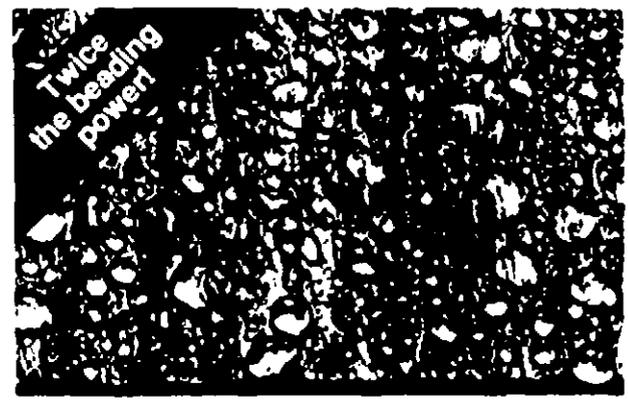

Seals water out. Lets wood gray and weather naturally.

**BEST AVAILABLE COPY**

ACTIVE INGREDIENT  
3-Iodo-2-Propynyl  
Butyl Carbamate 0 50%  
INERT INGREDIENTS 99 50%  
TOTAL 100 00%

**CAUTION:**  
KEEP OUT OF REACH OF  
CHILDREN.  
SEE SIDE PANEL FOR ADDITIONAL  
PRECAUTIONARY STATEMENTS.

**1 GALLON  
3.785 LITERS**

EPA Reg. No. 518-70  
EPA Est. No. 518-CT-1

AVAILABLE COPY

# CUPRINOL

# CLEAR WOOD PRESERVATIVE

## Seals, penetrates and preserves against rot.

- Dries clear - appears milky in the can
- Penetrating oil-based formula is specially engineered with an effective wood preservative to provide protection against decay and rot, as well as mildew
- Use on bare wood above ground - wood siding, decks, roof shingles, outdoor furniture, fences
- Now with more powerful water repellents to keep water out and protect against cracking and splitting, exceeds Federal Specification TT-W-572b for water repellency
- Now with special ingredients to make water bead up and roll off twice as long to protect wood
- Now may be applied immediately to new wood
- New advanced formula has lower odor, is nonflammable and safer to use
- Lets wood gray and weather naturally
- Easy to use - apply by spray, brush or dip, now conveniently cleans up with soap and water
- Recommended as a primer before paint to minimize blistering and peeling due to water absorption, and to provide decay resistance

Formulated to meet the strictest Volatile Organic Compound (VOC) air pollution regulations in the United States. VOC's contained in this product are below 350 grams/liter or 2.9 pounds/gallon

For preservation below ground and for wood in contact with water, use Cuprinol® No. 10 Green Wood Preservative

To protect wood from turning gray, use Cuprinol New Look™ Wood Finish

Use Cuprinol® REVIVE Easy Deck Cleaner to remove dirt and stains caused by mildew and algae - leaving a fresh, natural look

### LIMITED WARRANTY

Darworth Company will replace this product if it is shown to be defective within one year of the date of purchase. Claims must be sent within that warranty period, together with proof of purchase to Darworth Company P.O. Box K, Avon, CT 06001

This warranty does not apply if the product is not used as directed. THE DURATION OF ANY IMPLIED WARRANTIES IS LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. DARWORTH'S LIABILITY UNDER ANY WARRANTY, WHETHER EXPRESS OR IMPLIED, IS LIMITED SOLELY TO REPLACEMENT OF THE PRODUCT AND DOES NOT INCLUDE LABOR OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow limitations on how long an implied warranty lasts or exclusions or limitations of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

### DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling

#### PREPARATION:

THIS PRODUCT MUST BE APPLIED OUT-OF-DOORS TO WOOD INTENDED FOR EXTERIOR USE. NOT FOR INTERIOR USE. This product can be used for all suitable above-ground applications. (Use Cuprinol® No. 10 Green Wood Preservative where any portion of the wood will be below ground.) Use on cedar, redwood, pressure-treated and most other woods. Do not apply over hardboard or particle board. Do not use on wood that will be in contact with food, feed or potable water, or where prolonged skin contact is expected. Wood may be damp but not wet and must be free of bark, mildew and any finish. May be applied immediately to new wood. Before and during use, thoroughly mix contents of can. Do not mix with any other products. Do not thin. Product appears milky in the can but dries clear.

This preservative should not be applied to a mildewed surface. Test for mildew by applying a 50:50 solution of bleach and water. Mildew is present if the area lightens. Spray all mildew infected surfaces with a solution of 1 qt. household bleach and 3 qts. warm water. Let stand for 30 minutes, then rinse with clean water.

Redwood and cedar contain natural extractives. To minimize extractive discoloration, apply a solution of 1 part oxalic acid and 9 parts water. Let it sit for half an hour. Then rinse with clean water.

#### APPLICATION:

Apply by synthetic brush, spray or dip. For best results, apply when surface temperatures are between 50° and 90° and will not fall below 40° during 24 hours after application. Thoroughly cover cut ends with two coats. The more preservative absorbed by the wood, the longer and more effective the protection. If the first coat is quickly absorbed, apply a second coat at any time after the initial application has dried to the touch. DO NOT apply more than two coats. Treat to saturation, but be sure to pick up puddles with a brush. On initial treatment of new wood siding, two coats are recommended. When dipping, allow to soak for 3 minutes.

Use only one thin coat if used as a primer before painting. Wait at least 24 to 36 hours after application before painting with a good quality oil based paint or primer. During humid conditions a longer drying time may be necessary. Wait 6 to 12 months before applying latex paints or clear finishes.

We recommend that wood be re-treated within 3 years. Roofs should be re-treated within 2 years. Areas subject to direct water contact or severe exposure may require an earlier reapplication.

#### COVERAGE:

Ranges from 150-300 sq. ft. per gallon depending on wood porosity, surface texture, and dryness of wood. Cuprinol® Clear Wood Preservative dries to the touch in 5 hours but thorough drying requires 24 hours.

#### CLEANUP:

Clean brushes and tools immediately after use with soap and water. If cleanup is delayed, use mineral spirits or paint thinner.

### STORAGE & DISPOSAL

#### STORAGE

Close container tightly and store upright to prevent leakage. Do not store near excessive heat, sparks or flames. Avoid storage near feed or food products. KEEP FROM FREEZING. Soak up spills or leaks with sand, dirt or synthetic absorbent.

#### PESTICIDE DISPOSAL

Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

#### CONTAINER DISPOSAL

Do not re-use original container. Triple rinse (or equivalent), then offer for recycling, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities.

### PRECAUTIONARY STATEMENTS: HAZARDS TO HUMANS AND DOMESTIC ANIMALS.

#### CAUTION

Keep out of reach of children. Harmful if swallowed. Avoid breathing spray mist or contact with eyes, skin or clothing. Use out-of-doors only. Wear goggles, rubber gloves and protective clothing when applying or handling freshly treated lumber. Wash thoroughly with soap and water after handling and before smoking or eating.

#### FIRST AID

If swallowed: Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person. Get medical attention.

If in eyes: Flush eyes with plenty of water. Get medical attention.

If on skin: Wash skin thoroughly with soap and water. Get medical attention if irritation persists.

If inhaled: Remove victim to fresh air. Resuscitate if necessary. Get medical attention.

#### ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water. Do not contaminate water when disposing of equipment wash waters.

For consumer information call Cuprinol® Brand Technical Services  
800-624-PROS CT 800-228-7103

Darworth Company 

AVON, CONNECTICUT 06001

© 1990 Ensign-Bickford Industries, Inc.

0 27564 20047 9

209A1