



CUPRINOL

OIL BASE
WATER
CLEANUP.

SEMI-TRANSPARENT

STAIN & WOOD PRESERVATIVE

Keeps water out. Protects against mildew & rot.

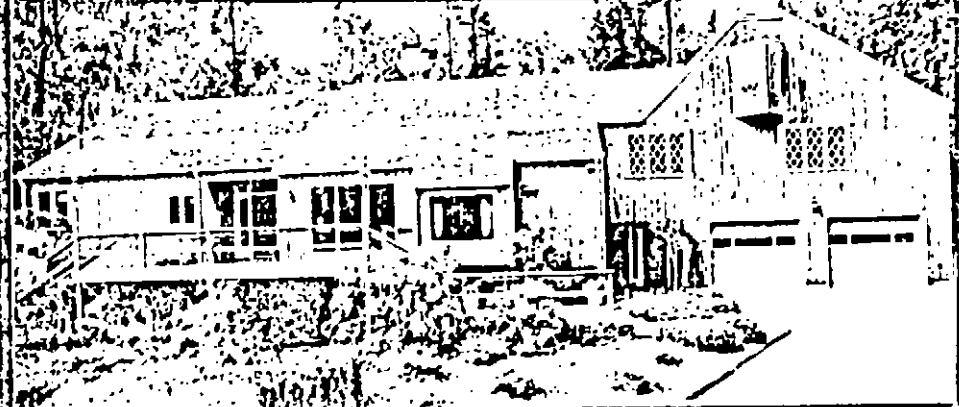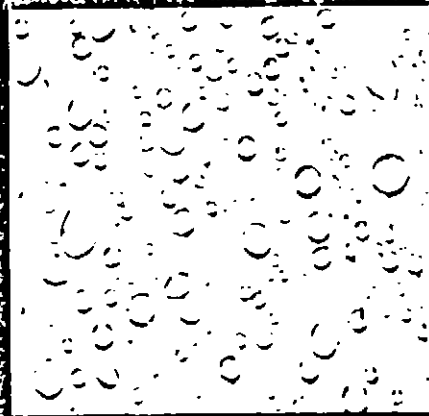

ACTIVE INGREDIENTS
Bis (4-methylphenyl) ether
Chlorophenol
Tris (4-methylphenyl) ether
INERT INGREDIENTS
TOTAL 100%
EPA REG. NO. 816-71
EPA Est. No. 111-011

KEEP OUT OF REACH
OF CHILDREN. DANGER!
SEE BACK PANEL FOR ADDITIONAL
PRECAUTIONARY STATEMENTS
1 GALLON (3.785 LITERS)

BEST AVAILABLE COPY

PRECAUTIONARY STATEMENTS. HAZARDS TO HUMANS & DOMESTIC ANIMALS.

WARNING: Corrosive, causes eye, and skin damage. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. May be fatal if swallowed. Do not breathe vapors or spray mist. May be absorbed through skin. **FIRST AID:** If swallowed, immediately drink 1 or 2 glasses of milk. If milk is not available, drink 1 or 2 glasses of water. Then induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person. Get medical attention. If contact with eyes, flush with water for 15 minutes. Get medical attention. If contact with skin, immediately remove any contaminated clothing. Wash skin thoroughly with soap and water. Get medical attention if irritation persists. Wash clothing before reuse. **ENVIRONMENTAL HAZARDS:** This pesticide is toxic to fish, aquatic invertebrates and marine/estuarine organisms. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This product must be applied out-of-doors to wood intended only for exterior use. **BEFORE USE, THOROUGHLY MIX CONTENTS OF CAN.** For color uniformity, mix all cans together before use and stir occasionally during use. Use on clean, unprimed wood or on previously oil-base (semi-transparent) stained surfaces which are free of all mildew. Apply by synthetic brush, spray or dip (soaking 15-30 secs, framing lumber up to 2 mins). Backbrush after spray or dip. If stain is NOT freely absorbed by wood, allow surface to weather. Test absorbency by sprinkling a few drops of water on the wood. If rapidly absorbed, the surface is ready. Over application may cause streaking and prolong drying time. When adequately absorbed by the wood, the stain dries to a flat finish. The colors will vary somewhat on different woods. Recoating over other colors may affect the color. **A SAMPLE RECOATING IS RECOMMENDED.** Do not use on hardboard or over creosote base materials. Thoroughly cover cut ends and joints. For best results, apply in the shade with surface temperatures between 50 F and 90 F and which will not fall below 40 F during 24 hours after application. **DO NOT TWIN OR MIX WITH ANY OTHER PRODUCT.** To avoid lap marks maintain a wet edge. Depending on wood type, dries to touch in 3 hours, but thorough drying requires 24 hours. Sunlight will assist drying. If desired, a second coat may be applied at any time after the initial application has dried to the touch. Second coat applications may produce a more intense color. Close container after each use. Do not apply if rain is forecasted within 12 hours after application. May be applied to damp surfaces but not wet surfaces.

USE ONLY WITH ADEQUATE VENTILATION.

Coverage for these stains ranges from 150 sq. ft. per gallon for rough sawn materials, up to 300 sq. ft. per gallon for smooth materials. **Cleanup:** Clean brushes and other tools immediately after use with soap and water. If cleanup is delayed, use mineral spirits or turpentine.

For decks and outdoor furniture use Cuprinol Deck Stain.

STORAGE AND DISPOSAL
Do not store near feed or food products. Do not reuse empty container. Wrap container and put in trash collection.

ACCEPTED

FEB 13 1989

Under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, this pesticide is registered under EPA Reg. No. 518-71

CUPRINOL STAIN & WOOD PRESERVATIVE


When it's wood against weather.*



Resists rot.



Resists mildew discoloration.*



Repels water.

CUPRINOL STAIN & WOOD PRESERVATIVE now combines the penetration protection of an oil base stain with easy water cleanup. Resists rot, mildew, warping and swelling. Use on wood siding, shakes, and fences. When properly applied will NOT crack, blister or peel.

- Durable, light-fast pigments screen out the sun's rays and help the coating to resist fading.
- Long lasting water repellents help resist pigment washoff, warping and swelling.
- Effective fungistats resist fungi that product rot and mildew discoloration.

*This product will resist mildew attack after application; however, it will not kill mildew present prior to staining. Test for mildew by applying a 50/50 solution of bleach and water. Mildew is present if application area lightens. Clean all mildew infected surfaces with a solution of: 1 Qt. household bleach, 3 Qts. warm water. Let stand 30 minutes, then rinse with clear water. Apply Cuprinol only after area dries.

LIMITED WARRANTY

Darworth Company will replace this product if it is shown to be defective within one year of the date of purchase. Claims must be sent within the warranty period, together with proof of purchase, to: Darworth Company, P.O. Box K, Avon, CT 06001

This warranty does not apply if the product is not used as directed. THE DURATION OF ANY IMPLIED WARRANTIES IS LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. DARWORTH'S LIABILITY UNDER ANY WARRANTY, WHETHER EXPRESSED OR IMPLIED, IS LIMITED SOLELY TO REPLACEMENT OF THE PRODUCT AND DOES NOT INCLUDE LABOR OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow limitations on how long an implied warranty lasts or exclusions or limitations of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

For consumer information, call Cuprinol® Brand Technical Services. 800-624 PROS CT 800-228-7103

Darworth Company
AVON, CONNECTICUT 06001

(C) 1989 Ensign-Bickford Industries, Inc.

BEST AVAILABLE COPY