

20F5

-2-

② The "Statement of Practical Treatment" section and associated information must appear on the front panel of the label immediately following "Keep Out of Reach of Children" and "CAUTION".

3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product bearing the amended labeling constitutes acceptance of these conditions.

A stamped copy of the labeling is enclosed for your records.

Enclosures A/S

Sincerely,

Lois A. Rossi  
Product Manager (21)  
Fungicide-Herbicide Branch  
Registration Division (H7505C)

**BEST AVAILABLE COPY**

# CUPRINOL® 205

No. 25

# CLEAR WOOD PRESERVATIVE

Protects wood against watermarking, mildew, rot.


Water actually beads up  
and rolls off, protecting wood.

ACTIVE INGREDIENT:	
3-iodo-2-propynyl	0.5%
butyl carbamate	
INERT INGREDIENTS:	
	99.5%
TOTAL	100.0%

KEEP OUT OF REACH OF CHILDREN.


### WARNING:

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

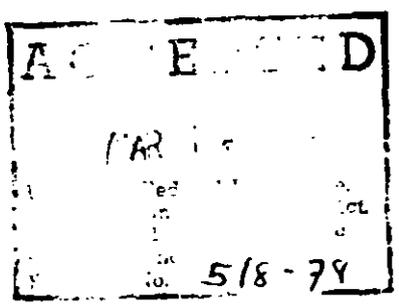

1 GALLON  
3.785 LITERS  
NET WT. 6.8 LB/GAL

EPA Reg. No. 518-  
EPA Est. No. 518-C1-1

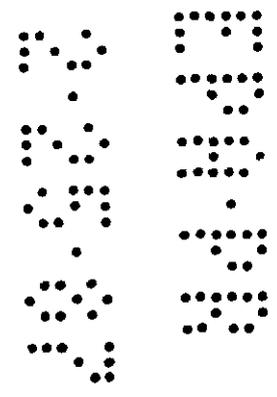

BEST AVAILABLE COPY

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS & DOMESTIC ANIMALS  
WARNING

140F5

Contains petroleum distillates. Use only with adequate ventilation. Avoid prolonged breathing of vapor or spray mist. Harmful if swallowed. Causes substantial but temporary eye injury. Do not get in eyes, on skin, or on clothing. Wear goggles and rubber gloves when handling, and rubber gloves when handling freshly treated lumber. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before re-use.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.  
IF SWALLOWED: Do not induce vomiting. Promptly drink a large quantity of milk, egg whites or gelatin solution; if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention immediately.  
IF INHALED: Remove victim to fresh air.  
IF IN EYES: Flush with plenty of water. Get medical attention.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

COMBUSTIBLE MIXTURE. DO NOT USE. POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. IN CASE OF FIRE, USE WATER SPRAY, FOAM, CARBON DIOXIDE OR DRY CHEMICAL.

N.Y.F.D. Certificate of Approval No. 3799

LIMITED WARRANTY

Darworth Company will replace this product if it is shown to be defective within one year of the date of purchase. Claims must be sent within the warranty period, together with proof of purchase to Darworth Company, P.O.Box K, Avon, CT 06001.

This warranty does not apply if the products is not used as directed. THE DURATION OF ANY IMPLIED WARRANTIES IS LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. DARWORTH'S LIABILITY UNDER ANY WARRANTY, WHETHER EXPRESSED OR IMPLIED, IS LIMITED SOLELY TO REPLACEMENT OF THE PRODUCT AND DOES NOT INCLUDE LABOR OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow limitations on how long an implied warranty lasts or exclusions or limitations of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

© 1987 Ensign-Bickford Industries, Inc.

Darworth Company  
Avon, Connecticut 06001

**BEST AVAILABLE COPY**

#### DIRECTIONS FOR USE

JOF5

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Cuprinol Clear Wood Preservative No. 25 is for use on bare wood above ground level to protect against rot, mildew, warping and swelling. It contains an effective fungistat. Cuprinol preservative is not a varnish, stain, or sealer. It will not crack, chip, blister, or peel. Cuprinol penetrates to protect wood against mildew, watermarking and other water damage while still letting your wood weather naturally. This weathering process can produce graying and contrasting wood tones, depending upon the type of wood and its exposure. Use it on all bare wood outside, above ground line, and especially wood that is subject to dampness: house siding, sills, doors, door frames, windows, millwork, roofs, fences, decks. Do not use on wood that will be in contact with food, feed, potable water, or prolonged dermal (skin) contact. Due to the presence of petroleum distillates in this product, do not use where dairy cattle or livestock can come in contact with the treated wood. Use Cuprinol Wood Preservative before you paint bare wood too.

It helps protect the wood and extends the life and beauty of paint by protecting against blistering, cracking and peeling caused by rain and dew. Allow 24 hours after application before painting with a good quality, oil-based paint, or 6-12 months before applying latex paint or clear finishes.

The degree of weathering that results from different exposures is unpredictable. In some woods, weathering may cause natural extractives to produce uneven shadings. To minimize extractive discoloration, apply a solution of 1 part oxalic acid and 9 parts water. Let it sit for half an hour. Then rinse with water; let dry and apply Cuprinol Wood Preservative.

This preservative should not be applied to a mildewed surface. Test for mildew by applying a 50-50 solution of bleach and water. Mildew is present if the area lightens. Scrub all mildew-infected surfaces with a solution of 1 Qt. household bleach and 3 Qts. warm water. Let stand for 30 minutes, then rinse with clear water.

BEFORE USE, THOROUGHLY MIX CONTENTS OF CAN. DO NOT THIN. Applying paints and stains often results in splashing or dripping. Cover desirable plants and shrubs to protect against possible injury. Wood must be dry, free of bark, mildew and any finish. Cut and machine wood prior to treatment, if possible. If not, liberally apply two coats of preservative to all joints, cracks, cut-ends, holes or other openings. Apply by brush, spray, or dip. The more preservative absorbed by the wood, the longer and more effective the protection. Use only one thin coat before applying paint. Cuprinol Clear No. 25 dries in 24 to 36 hours on dry wood. For second coat application, apply within one hour of the first. When dipping, allow to soak for 3 minutes. For best results and uniformity of appearance, retreat once every three years. Roofs should be retreated every 2 years. On initial treatment of new wood siding, two coats are recommended.

Clean Cuprinol Clear No. 25 from brushes, etc. with mineral spirits, paint thinner or turpentine.

Coverage: 300 sq. ft. per gallon average, depending on wood porosity and surface roughness.


For protection below ground and for wood in contact with water, use Cuprinol Green Wood Preservative No. 10.

#### STORAGE AND DISPOSAL

STORAGE: Do not use or store near heat or open flame. Avoid storage near feed or food products.

DISPOSAL: Do not reuse empty container. Rinse thoroughly before discarding in trash. Securely wrap original container in several layers of newspaper and discard in trash.

Darworth Company  
Avon, Connecticut 06001

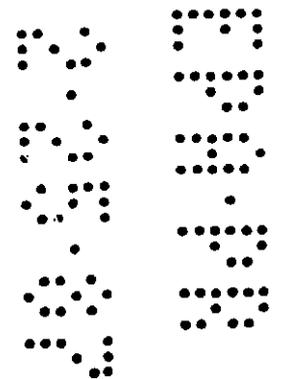

**BEST AVAILABLE COPY**