


# santOBrite

TECHNICAL SODIUM PENTACHLOROPHENATE BY

## Monsanto

### BRIQUETTES

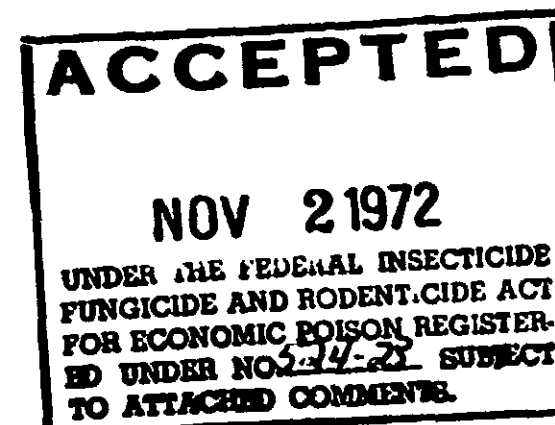

6651-1

For manufacturing use only.

Keep out of reach of children.

### WARNING!

HARMFUL IF INHALED OR SWALLOWED.

CAUSES SKIN IRRITATION.

INJURIOUS TO EYES.

ABSORBED THROUGH SKIN FROM  
SOLUTIONS.

Do not breathe dust or spray mist.

Do not get in eyes, on skin, or on  
clothing. Wear rubber gloves and  
goggles.

Wash thoroughly after handling.

In case of contact with dry material or  
its solution, wash skin at once with  
plenty of soap and warm water; for  
eyes, flush with plenty of water for at  
least 15 minutes and get medical  
attention. Remove and wash clothing  
before reuse.

If swallowed, induce vomiting. Call a physician.

NOTE TO PHYSICIAN: This product is a meta-  
bolic stimulant. causes hyperthermia. Treat sympto-  
matically.

#### ACTIVE INGREDIENTS: 90%

Sodium Pentachlorophenate 79%

Sodium Salts of other chlorophenols 11%

#### INERT INGREDIENTS: 10%

Do not reuse container. Destroy when empty.

#### DIRECTIONS FOR USE

PAPER MILL FUNGAL SLIME CONTROL: Add 0.4 to  
1.0 pound of this product to the beaters per ton of  
paper produced. Refer to our technical bulletin.

FOR CONTROL OF ALGAL AND FUNGAL SLIME IN  
INDUSTRIAL RECIRCULATING WATER COOLING  
TOWERS: Badly fouled systems must be cleaned  
before treatment is begun. The product should be  
applied when the system is in jeopardy of becoming  
affected or after cleaning systems whose efficiency  
is already impaired.

INITIAL DOSE: Apply  $\frac{1}{2}$  to 1 pound of this product  
per 1500 gallons of water in the system. Repeat  
until control is achieved.

SUBSEQUENT DOSE: When microbial control is evi-  
dent, add  $\frac{1}{4}$  to 1 pound of this product per 1500  
gallons of water in the system every week or as  
needed to maintain control. Apply the product at a  
point in the system where it will be uniformly mixed.

#### FOR SAP STAIN AND MOLD CONTROL

When dipping, add sufficient alkali to  
maintain pH in excess of 7.5 at all times.

LUMBER: Dissolve 7 lbs. of this product in 100 gal-  
lons water. Dip or spray the fresh green lumber in  
this solution to thoroughly wet the boards. Avoid  
excessively alkaline solutions since they may cause  
discoloration of beech and other hardwoods.

LOGS: Spray ends and debarked areas of fresh logs  
with a solution of 14 lbs. of this product in 100  
gallons water.

POLES, TIES AND TIMBERS: Dip or spray entire sur-  
face with a solution of 14 lbs. of this product in  
100 gallons water. Spray again when seasoning  
checks develop.

LATH: Dip bundles of lath in a solution of 14 lbs.  
of this product in 100 gallons water. Pile in open  
layers using dry 2 x 4's for stickers and raise the  
piles well off the ground.

Wear protective clothing and rubber gloves when  
handling freshly treated wood.

This product is toxic to fish and wildlife. Keep out  
of lakes, ponds and streams. Treated effluent should  
not be discharged where it will drain into lakes,  
streams, ponds or public water. Do not contami-  
nate water by cleaning of equipment or disposal  
of wastes.



LOT NO.

PACKER

NET / LEGAL

LB.

KG.

MONSANTO COMPANY, ST. LOUIS, MISSOURI 63166, U.S.A.

(EPA Reg. No. 524-23)