





MARINE

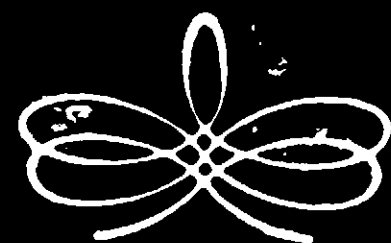

ANTI-FOULING BOTTOM PAINT

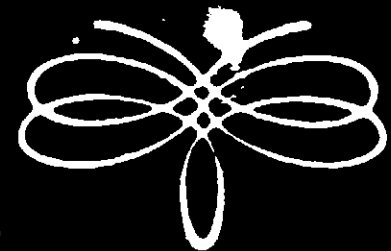

with TBTF for salt or fresh water

FORMULA • 6364 B
COPPER BRONZE

PIGMENT 19.1%	
*Metallic Copper powder	19.1
VEHICLE 30.92%	
Acrylic Polyester Resin	19.0
Xylenes High Boiling	32.2
Ethyl Glycol Acetate	13.4
Tributyltin Fluoride	14.3
	100.0%

EPA REG. NO. 539-276AA

EPA EST. NO. 8788-TX-1

30 63644 COPPER-BRONZE

32 FL.OZ. (1 QT.)
(.95 LITERS)

DANGER!

KEEP OUT OF REACH OF CHILDREN

See side for other precautions.

*Active Ingredients	
Copper Powder	18.9%
Tributyltin Fluoride	13.6%
Inert Ingredients	67.5%
	100.0%
Metallic Tin	5.50%

REGISTERED

1975

Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended for the pesticide
registration under
EPA Reg. No. 539-276

DANGER

May cause severe eye burns. May cause eye damage. May be fatal if swallowed. May cause skin irritation or delayed chemical burns. Do not get in eyes, on skin, or on clothing. Vapor harmful, avoid breathing of vapor or sanding dust. Wear goggles or face shield and rubber gloves while handling.

COMBUSTIBLE. DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN FLAME.

Use with adequate ventilation. Close container after each use. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. Do not contaminate water by cleaning of equipment or disposal of wastes.

ANTIDOTE STATEMENT

In case of contact, immediately flush eyes with plenty of water for at least 15 minutes, and get medical attention; wash skin with plenty of soap and water. Wash contaminated clothing before re-use. If swallowed CALL PHYSICIAN IMMEDIATELY.

DO NOT SPRAY!

WEAR MASK WHILE SPRAYING. TANT ACRYLIC RESINS BARNACLES, TEREDOS

RECOMMENDED FOR:

FEATURES:

- TBTF (Tributyltin Fluoride)
- The water resistant and retard most growth of
- Formulated in "fade"
- TBTF remains effective

BEFORE YOU PAINT:

Surface should be clear over previously painted be removed. Previous powdery feel, should be fiberglass or power sand

OLD PAINT IN GOOD

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

Send this reply to: DART, Apt. 120 or NEW OR UNFINISH

APPLICATION:

For best results used in fresh water. At least three coats should be applied. For best results, avoid painting in high winds. Flow on paint generous. Allow drying time between coats. Clear immediately after using.

NOTE: Scratches and damage from corrosion directions for painting

COVERAGE: Approximate

ACCEPTED WITH COMMENTS