

NET CONTENTS:

PENTA-TOX DP[®]

CONCENTRATE

A 1 TO 5 CONCENTRATE OF
PENTACHLOROPHENOL SOLUTION
FOR WOOD PRESERVATION
AND WATER REPELLENT INGREDIENTS
FOR DIMENSION PROTECTION*

ACTIVE INGREDIENTS:	
PENTACHLOROPHENOL	21.7%*
OTHER CHLOROPHENOLS AND RELATED COMPOUNDS	3.8%*
PETROLEUM HYDROCARBONS	35.0%
INERT INGREDIENTS	39.5%

DIRECTIONS FOR DILUTING

Dilute one volume of Pentatox DP Concentrate with 5 volumes of mineral spirits and agitate well to insure uniformity. If the Concentrate has been stored at near freezing temperatures, allow to warm up before mixing. Do not attempt to warm solution with an open flame.

CAUTION

USDA Reg.
No. 551-104

KEEP OUT OF REACH OF CHILDREN

See right panel for additional cautions




Manufactured by: BAIRD & McGUIRE, INC.
Holbrook, Mass.

WARNING

Harmful if swallowed or absorbed through skin. Causes skin irritation. Do not breathe vapor, fumes or spray mist. Do not get in eyes, on skin, or on clothing. Wash thoroughly after handling or spraying.

For eyes, flush with plenty of water and get immediate medical treatment.

INTERNAL: Give emetic of salt and water followed by milk or egg white beaten with water. Keep patient quiet and warm. Summon a physician at once.

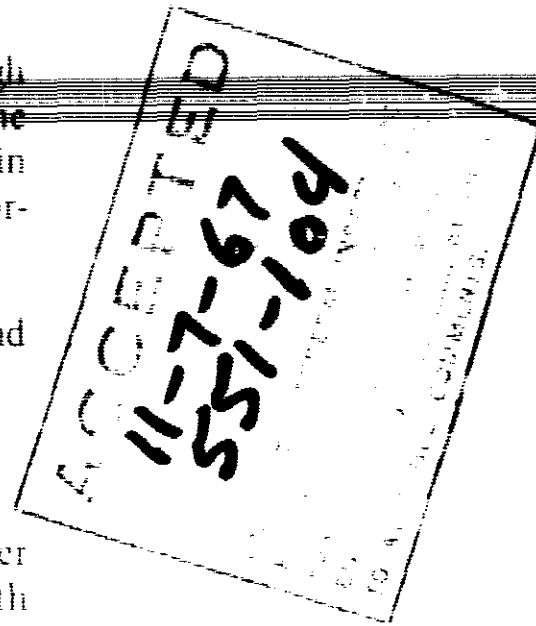

PENTA-TOX DP

protects wood against Powder-Post Beetles and Termites, Stops Rot, Stain and Decay. Checks Swelling, Shrinking, Warping, and Checking.

INFLAMMABLE

Contains volatile inflammable solvent. Do not pour, spill or spray near open flame. Avoid breathing vapors.

DIRECTIONS FOR APPLICATION

For best results immerse wood to be treated in diluted solution for 3 minutes or longer. If dipping is not possible, apply 2 liberal brush or spray applications. Allow 1 hour between applications. Make certain all surfaces are treated. If treated wood is sawed or planed, re-treat newly exposed surfaces. Allow a minimum of 24 hours or longer after applying Penta-Tox DP. Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well-seasoned and immersed in the diluted product for a period of 12 to 48 hours to be an effective wood preserver against wood rotting fungi.

Less paint is required over wood treated with Penta-Tox DP.

*Contains 25.5% Technical Pentachlorophenol as defined by Fed. Spec. TT-W-570