EPA Form 8570-6 (Rev. 5-76)

SIGNATURE OF APPROVING OFFICIAL


PREVIOUS EDITION MAY BE USED UNTIL SUPPLY IS EXHAUSTED.

ACCE TED

OCT 26 1981

Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 577-588



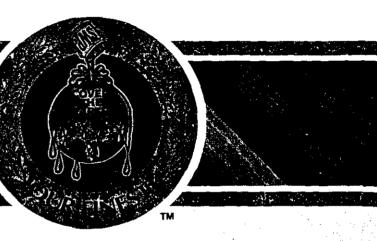

CLEAR WOOD FINISH with PRESERVATIVE CLEAR

100.00% 100.00 81 A 1.7 C 2

A17 C 2 NON-PHOTOCHEMICALLY **Protects the Natural Beauty of Wood**

CLEAR WOOD FINISH PRESERVATIVE

For Wood Siding, Shakes, and Shingles
Water Repellent • Protects Wood from Rot, Deterioration, and Mildew


ONE GALLON

CLEAR 104-5749

3.785 liters

KEEP OUT OF THE REACH OF CHILDREN.

WARNING! COMBUSTIBLE. HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH THE SKIN. CAUSES EYE AND SKIN IRRITATION. See back panel for additional Precautionary Statements.

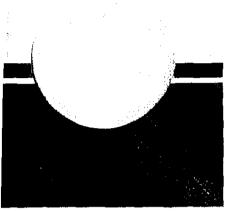

ACCEPTED

OCT 2 6 1981

Under the Federal Insecticide, Pungicide, and Rodenticide Act, as amended, for the posticide registered under EPA Bed. No. 577-538

CLEAR WOOD FINISH WITH PRESERVATIVE

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

A clear, water repellent wood preservative designed for maximum penetration on bare and unfinished exterior wood surfaces. It protects from water damage, rot, mildew, and deterioration. Clear Wood Finish can be used either by itself or under other finished coats to prolong the life of the wood.

Clear Wood Finish contains TBTO, a wood preservative, and FOLPET, a mildewcide and fungicide. Its water repellency allows water to bead up and roll off.

STORAGE AND DISPOSAL: Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection. Keep away from food and feed. Do not transfer contents to other containers for storage.

SURFACE PREPARATION:

Clear Wood Finish may be applied to any new or weathered uncoated exterior shingles, shakes, rough sawn or smooth siding, decks and fences. Use on Pine, Fir, Redwood or Cedar Woods or plywood. Some smooth new lumber should be sanded to open the pores to permit proper penetration or should be allowed to weather several months. If Clear Wood Finish is to be covered with a finish coat, allow it to dry thoroughly (at least 24 hours) before applying the top coat. If a colored natural appearance is desired, SHERWIN-WILLIAMS SEMI-TRANSPARENT WOOD PRESERVATIVE STAIN is recommended as a top coat. If a latex finish is desired, an alkyd exterior wood primer must be applied first. Application of top coats over this product may result in areas of high gloss which will become more uniform with weathering.

Do Not Apply to Previously Painted, stained, varnished or any sealed surfaces. The old finish must be completely removed for Clear Wood Finish to penetrate effectively. Do not use on composition board or wood roofs.

APPLICATION:

Clear Wood Finish may be applied by brush, roller, or airless spray. Smaller pieces may be dipped. Apply a full coat and let the wood absorb as much as it will to get the best protection. Do not use excessive coats which may result in a gloss finish. Allow 24 to 48 hours drying time depending on temperature and humidity. Covers 150 to 250 sq. ft. per gallon (4 to 6 sq. m per l) depending on porosity of wood. Clean up brushes, rollers, and spray equipment with mineral spirits.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMAN AND DOMESTIC ANIMALS WARNING!

HARMFUL OR FATAL IF SWALLOWED. If swallowed, DO NOT INDUCE VOMITING. CALL PHYSICIAN AT ONCE. Use only in well ventilated area. Do not breath vapor or spray mist. When spraying wear a vapor/particulate respirator approved under NIOSH/MESA SCHEDULE 23C. Do not get in eyes or on skin or clothing. Wear rubber gloves and protective clothing when applying or handling freshly treated lumber.

FIRST AID: If on skin wash with soap and water. Remove and wash contaminated clothing before reuse. If in eyes immediately flood with water for at least 15 minutes. Call a physician. If swallowed, do not induce comiting. Call a physician.

do not induce vomiting. Call a physician.
ENVIRONMENTAL HAZARDS: This product is toxic to fish and wildlife. Do not apply directly to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste.
PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE. To

PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE. To avoid spontaneous combustion soak oily cloths in water after use or place in a closed metal container away from buildings and other combustible materials. Do not use or store near heat or open flame.

DO NOT TAKE INTERNALLY.

KEEP OUT OF THE REACH OF CHILDREN.

(WP 4-81)

SATISFACTION GUARANTEED

This coating is a result of extensive research and testing by The Sherwin-Williams Company. We guarantee your satisfaction in the use of this product or your purchase price will be cheerfully refunded.

© 1981, The Sherwin-Williams Company



The Sherwin-Williams Company Cleveland, Ohio 44101