

**ACCEPTED**  
 OCT 26 1981  
 for the Federal Insecticide,  
 Fungicide and Rodenticide Act,  
 as amended under  
 EPA Reg. No.

**SHERWIN  
 Williams**



SEMI-TRANSPARENT  
 WOOD PRESERVATIVE STAIN  
 CLEAR BASE

Pigment by Weight	4.83%
Silicates	4.53%
Vehicle by Weight	95.47%
Alkyd Resin modified with Linoleic, Lin- oleic, Oleic and Stearic Acids	12.70%
Oniers and Additives	0.85%
Methacrylates	80.92%
Bis (tributyltin) oxide	0.34%
N (trichloromethyl) Thiophthalimide	0.66%
	100.00%

A-0 61  
**A14 T 5**  
 NON-PHOTOCHEMICALLY  
 REACTIVE

Exterior Alkyd  
**SEMI-TRANSPARENT  
 WOOD PRESERVATIVE  
 STAIN**

Water Repellent • Protects Wood from Rot, Deterioration, and Mildew

126 fl oz (3 qt 1 pt 14 fl oz)  
 BEFORE COLOR IS ADDED

CLEAR BASE 104-5764

3.726 liters

KEEP OUT OF THE REACH OF CHILDREN.  
**WARNING!** COMBUSTIBLE. HARMFUL OR FATAL IF SWALLOWED  
 OR ABSORBED THROUGH THE SKIN. CAUSES EYE AND SKIN IRRITATION.  
 See back panel for additional Precautionary Statements

ACTIVE INGREDIENTS	
Bis (tributyltin) oxide	34%
Folpet [N-[[trichloromethyl]thio]phthalimide]	66%
INERT INGREDIENTS	99.00%
TOTAL	100.00%

EPA Reg. No. 577-539 EPA Est. No. 577-CA-1, 577-CA-2, 577-GA-1,  
 577-IL-1, 577-MD-1, 577-NJ-1, 577-TX-1

Water Resistant Alkyd SEMI-TRANSPARENT  
**WOOD PRESERVATIVE STAIN**  
 For Above Ground Use on Wood Exposed to Moisture and Weather

**DIRECTIONS FOR USE:**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**COVERS** unfinished or previously stained (semi-transparent only) wood siding, stables, shakes, fences, railings, picnic tables, furniture, decks and floors.

A semi-transparent wood preservative stain designed for maximum penetration on bare exterior wood surfaces. For protection from water damage, rot, mildew, and deterioration.

Semi-transparent Wood Preservative Stain contains TBIO, a wood preservative, and COLPEL, a mildewcide and fungicide. Its water repellency allows water to bead up and roll off.

**STORAGE AND DISPOSAL:** Do not use or store inside the home. Do not reuse empty container. Wrap container and put in trash collection. Keep away from food and feed. Do not transfer contents to other containers for storage.

**SURFACE PREPARATION:**

• Remove dirt and debris. Sand down badly weathered surface to fresh wood. Wash off mildew with household bleach and water. Previous finishes, other than semi-transparent stain, must be completely removed.

**APPLICATION:**

• Stir thoroughly before and occasionally during use. • Use at 50 F (10 C) and above. • Apply uniformly with brush, pad or spray. • Cover 100 to 200 sq. ft. (9 to 19 sq. meters) on rough or porous surfaces. Up to 450 sq. ft. (33 sq. meters) on smooth, nonporous surfaces. That is a 6" x 4" (15 x 10 cm) area on a rough surface for each full 4" brush load—maximum.

**IMPORTANT!** All stains tend to lap mark (dark line where two freshly painted areas overlap). Minimize laps by: 1) Don't stain in direct sun or on hot surfaces; 2) Always stain into a wet edge — stain up and down along vertical siding and across horizontal siding; 3) Use two coats on badly weathered or unfinished wood, and whenever prominent unsightly lap marks appear on a first coat.

• Use only one thin coat on brushed or abraded plywood. • Do not use on composition board or wood roofs. • Also, apply only one coat to decks or flooring. Be sure decks and floors are either bare or well worn before staining. Please note! Stains wear under foot traffic leaving a different color in the wear area versus unworn areas. • Clean up tools in paint thinner. • Allow 24 hours drying if a second coat is necessary or before walking on.

**PRECAUTIONARY STATEMENTS  
 HAZARDS TO HUMAN AND DOMESTIC ANIMALS  
 WARNING!**

**HARMFUL OR FATAL IF SWALLOWED.** If swallowed, DO NOT INDUCE VOMITING. CALL PHYSICIAN AT ONCE. Use only in well ventilated area. Do not breathe vapor or spray mist. When spraying wear a vapor/particulate respirator approved under NIOSH/MESA SCHEDULE 23C. Do not get in eyes or on skin or clothing. Wear rubber gloves and protective clothing when applying or handling freshly treated lumber.


**FIRST AID:** If on skin wash with soap and water. Remove and wash contaminated clothing before reuse. If in eyes immediately flood with water for at least 15 minutes. Call a physician. If swallowed, do not induce vomiting. Call a physician.

**ENVIRONMENTAL HAZARDS:** This product is toxic to fish and wildlife. Do not apply directly to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste.

**PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE.** To avoid spontaneous combustion soak oily cloths in water after use or place in a closed metal container away from buildings and other combustible materials. Do not use or store near heat or open flame. **DO NOT TAKE INTERNALLY.**

**KEEP OUT OF THE REACH OF CHILDREN.**

WP 4 81

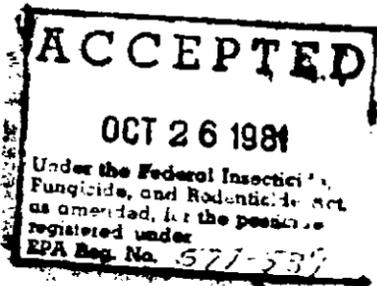

**SATISFACTION GUARANTEED**

This coating is a result of extensive research and testing by The Sherwin-Williams Company. We guarantee your satisfaction in the use of this product or your purchase price will be cheerfully refunded.

©1981 The Sherwin-Williams Company



The Sherwin-Williams Company  
 Cleveland, Ohio 44101