

FRONT PANEL

**Sherwin-Williams Semi-Transparent Wood
Preservative Clear Base A14T5**

Exterior Oil Alkyd

for decks and wood siding
quality performance

- for new or weathered wood
- highlights natural grain & texture of wood
- superior penetrating stain

OR

- Exterior Alkyd
- Water Repellent
- Protects Wood from Rot, Deterioration, and Mildew

[PRODUCT IDENTIFICATION NUMBERS]

Must Be Tinted Before Using

KEEP OUT OF REACH OF CHILDREN. WARNING!
COMBUSTIBLE! VAPOR HARMFUL. IRRITATES EYES, SKIN AND
RESPIRATORY TRACT. HARMFUL OR FATAL IF SWALLOWED

See back panel for additional Precautionary Statements

3 15/16 Qts. (126 fl. oz) 3.72 L BEFORE COLOR IS ADDED

OR

3.73 liter / 3 qt 1 pt 14 fl oz BEFORE COLOR IS ADDED

ACTIVE INGREDIENTS

Bis(tri-n-butyltin)oxide 0.34%
Folpet [N-trichloromethylthio]phthalimide] 0.66%


INERT INGREDIENTS 99.00%

TOTAL 100.00%

Contains petroleum distillates

EPA Reg. No. 577-539

EPA Est. No. 577-CA-1, 577-GA-1, 577-IL-1, 577-MD-1, 577-NJ-1,
577-TX-1, 577-OH-1, 577-KY-1, 577-NC-1, 577-FL-1, 577-IL-2,
577-KS-1, 577-CA-3

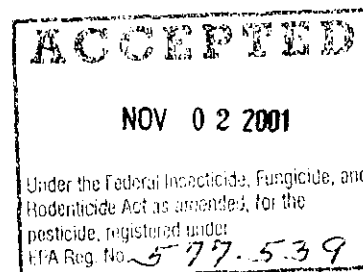

577-539

11-2-2001

11/4

BACK OR SIDE PANEL

CAS No.	Ingredient
64742-47-8	Mineral Spirits
Unknown	Alkyd Polymer
14807-96-6	Talc

VOC: ca 628-673 gms/L - 5.24-5.6 1 lbs/gal

NON-PHOTOCHEMICALLY REACTIVE
DO NOT THIN

H	HEALTH	2
F	FLAMMABILITY	2
R	REACTIVITY	0
	PERSONAL PROTECTION	

FIRST AID

IF INHALED: Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF IN EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

HAVE THE PRODUCT CONTAINER OR LABEL WITH YOU WHEN CALLING A POISON CONTROL CENTER OR DOCTOR, OR GOING FOR TREATMENT.

Note to Physician

Contains petroleum distillate - vomiting may cause aspiration pneumonia.

PRECAUTIONARY STATEMENT

HAZARDS TO HUMAN AND DOMESTIC ANIMALS

WARNING! HARMFUL OR FATAL IF SWALLOWED

Contents are combustible. Keep away from heat and open flame. **CONTAINS ALIPHATIC HYDROCARBONS. VAPOR HARMFUL.** Use only with adequate ventilation. If you experience eye watering, headaches, or dizziness, increase fresh air, or wear respiratory protection (NIOSH approved) or leave the area. Keep container closed when not in use.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and other aquatic organisms. Do not apply directly to water. Do not contaminate water when disposing of equipment, washwater, or rinseate.

PHYSICAL OR CHEMICAL HAZARDS

To avoid spontaneous combustion, soak oily cloths in water after use or place in a closed metal container away from buildings and other combustible materials. Do not use or store near heat or open flame.

**DO NOT TAKE INTERNALLY
KEEP OUT OF THE REACH OF CHILDREN**

USER SAFETY RECOMMENDATIONS - When spraying, wear a vapor/particulate respirator approved under NIOSH/MESA Schedule 23C. Avoid contact with eyes and skin. Wear long sleeved shirt, long pants, shoes, and socks when handling or applying this product. Users should wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Users should remove clothing immediately if product gets inside. Then wash thoroughly and put on clean clothing. Users should remove clothing immediately after handling this product. As soon as possible, wash thoroughly.

NOTICE: DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE

Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

ACCEPTED

NOV 02 2001

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under

EPA Reg. No. 577-539

b/c

BACK OR SIDE PANEL, continued

[Optional Product Name] Beautifies and highlights the rich grain and texture of wood. Provides uniform and natural color plus protection. Water repellent. Protects from rot, deterioration, and mildew. For above ground use on exterior wood. **Covers** unfinished or previously stained (semi-transparent only) wood siding, shingles, shakes, fences, railings, picnic tables, furniture, decks and floors. **A semi-transparent wood preservative stain** designed for maximum penetration on bare exterior wood surfaces. Also provides for protection from water damage, rot, mildew, and deterioration. [PRODUCT NAME] contains TBTO and FOLPET - wood preservative, mildewcide and fungicide. Its water repellency allows water to bead up and roll off.


OR

FOR ABOVE-GROUND USE ON WOOD EXPOSED TO MOISTURE AND WEATHER.

Beautifies and highlights the rich grain and texture of wood. A semi-transparent wood preservative stain designed for maximum penetration on bare exterior wood surfaces. Also provides for protection from water damage, rot, mildew, and deterioration. Covers unfinished or previously stained (semi-transparent only) wood siding, shingles, shakes, fences, railings, picnic tables, furniture, decks and floors. For above ground use on wood exposed to moisture and weather. [PRODUCT NAME] contains TBTO and FOLPET - wood preservative, mildewcide and fungicide. Its water repellency allows water to bead up and roll off.

DIRECTIONS FOR USE--It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.
Do not apply this product in a way that it will contact any person or pet.

STORAGE AND DISPOSAL --Do not use or store inside the home. Keep away from food and feed. Do not transfer to other containers for storage.
If empty: Do not reuse this container. Place in trash or offer for recycling if available. **If partly filled:** Call your local solid waste agency or 1-800-CLEANUP for disposal instructions. Never place unused product down any indoor or outdoor drain.

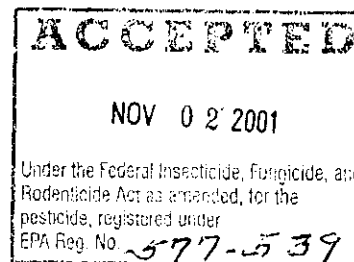

SURFACE PREPARATION

Remove dirt and debris. Sand down badly weathered surfaces to fresh wood. Remove previous finishes (other than semi-transparent stain). Remove mildew by scrubbing with a mixture of one quart liquid bleach in three quarts of water. Wear protective glasses or goggles and waterproof gloves. Quickly wash off mixture that touches skin. Do not add detergents or ammonia to bleach/water mixture.


APPLICATION

Stir stain thoroughly before and occasionally during use. Under normal environmental and application conditions, thinning--not required. Use at 50°F (10°C) and above. Apply uniformly with brush, pad or spray. Covers 100 to 200 square feet (9 to 19 square meters) per gallon on rough or porous surfaces. Up to 350 square feet (33 square meters) per gallon on smooth, non-porous surfaces. Allow to dry 24 hours under normal drying conditions (70°F & 50% humidity) before recoating or walking on. **Important** - All stains tend to lap mark (darker color or dark lines where two freshly painted areas overlap). Minimize laps by: 1) Do not stain in direct sun or on hot surface. 2) Always stain into a wet edge. 3) Stain up and down along vertical siding and across horizontal siding.

4) Use two coats on badly weathered or unfinished wood and whenever prominent, unsightly lap marks appear on first coat. Do not use on composition board or wood roofs. Be sure decks and floors are either bare or well worn before staining. Please note: Stains wear under foot traffic leaving a different color in the wear area versus unworn areas.

CLEAN UP - Use a paint thinner or mineral spirits for cleaning tools and equipment following manufacturer's safety instructions. Any solvent soaked material, such as rags, should be placed in water when discarded.

OR

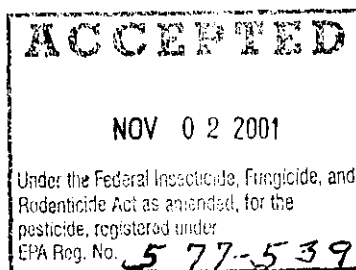

STAINING INSTRUCTIONS

Surface Preparation: Remove dirt and debris. Sand down badly weathered surface to fresh wood. Remove mildew by scrubbing with a mixture of one quart household liquid bleach to three quarts of water. Wear protective glasses or goggles and waterproof gloves. Quickly wash off any of the solution that touches your skin. Do not mix bleach and detergents.

Previous finishes, other than semi-transparent stain, must be removed.

Application - Stir thoroughly before and occasionally during use. Use at 50°F (10°C) and above. Apply uniformly with brush, pad or spray. Cover 100 to 200 sq. ft. (9 to 19 sq. meters) per gallon on rough or porous surfaces. Up to 350 sq. ft. (33 sq. meters) per gallon on smooth, non-porous wood surfaces.

Important! All stains tend to lap mark (darker color where two freshly painted areas overlap). Minimize laps by: 1) Don't stain in direct sun or on hot surfaces. 2) Always stain into a wet edge—stain up and down along vertical siding and across horizontal siding. 3 Use two coats on badly weathered or unfinished wood, and whenever prominent unsightly lap marks appear on first coat.

Do not use on composition board or wood roofs. Be sure decks and floors are either bare or well worn before staining. Please note: Stains wear under foot traffic leaving a different color in the wear area versus unworn areas. Allow 24 hours drying if a second coat is necessary or before walking on.

CLEAN UP - Use paint thinner or mineral spirits for cleaning tools and equipment following manufacturer's safety instructions. Any solvent soaked material such as rags should be placed in water when discarded.

SATISFACTION GUARANTEED

This coating is a result of extensive research and testing by _____. We guarantee your satisfaction in the use of this product or your purchase price will be cheerfully refunded.

Or

[COMPANY OR DISTRIBUTOR NAME] LIMITED WARRANTY

This product will perform as stated on this label following label instructions. If the product fails to meet this warranty, you will be supplied additional product equal to the quantity purchased or, at your option, a refund of the purchase price of the product will be made at the place of purchase.

4/14