



CUPRINOL

ACCEPTED
 MAR 27 1994
 Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under Registration No. 547-543

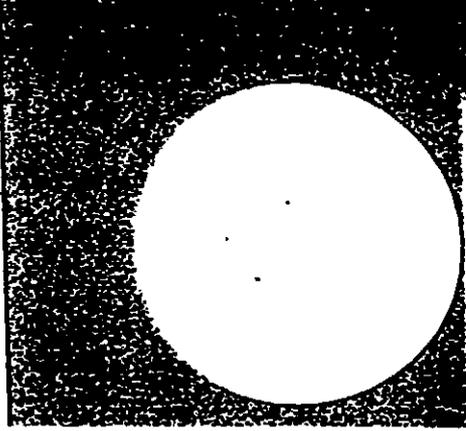

The Cuprinol Promise
 We promise that Cuprinol products will save you time and help protect and beautify wood.
 We also promise that Cuprinol products will perform to your satisfaction or we'll cheerfully refund your money.
 If you have any questions about Cuprinol products, where, how and when to use them, please call us at
1-800-424-5837

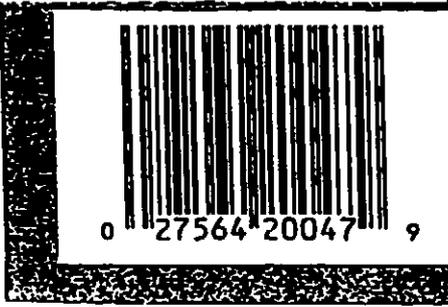

CLEAR PRES
 Penetrates to protect wood

ABOVE GROUND USE

CONTR

Seals water out

1 Gallon - 3.785 Liters

BEST AVAILABLE COPY

Siding Clear Preservative



LEARWOOD PRESERVATIVE

Helps to protect against mildew and rot.

CUPRINOL Group



CONTRACTOR SERIES

New
clean up
formula

Water on. Lets wood gray and weather naturally.


Liters

CAUTION: KEEP OUT REACH OF CHILDREN

See side panels for additional Precautionary Statements

BEST AVAILABLE COPY

CUPRINOL

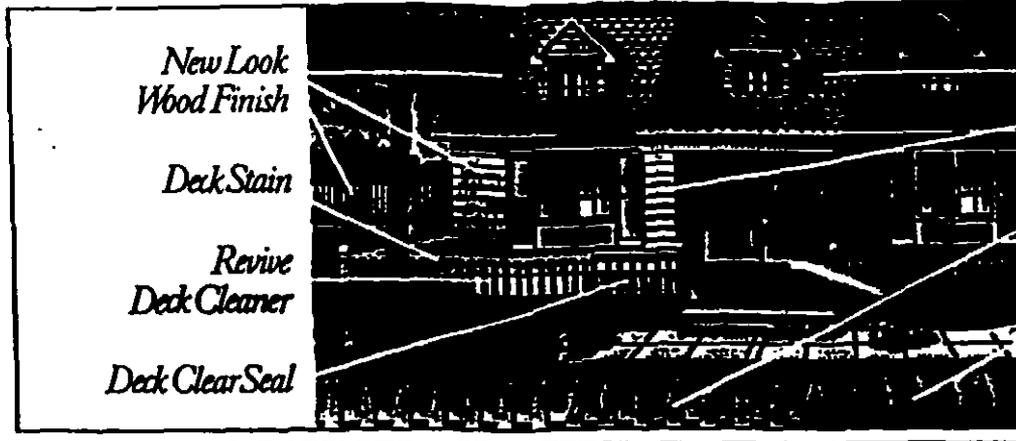

*New Look
Wood Finish*

Deck Stain

*Revive
Deck Cleaner*

Deck Clear Seal

USE ON BARE WOOD ABOVE GROUND Wood siding, Wood

Seals, penetrates and preserves against rot.

- Dries clear - appears milky in the can.
- Penetrating oil-based formula is specially engineered with an effective wood preservative to provide protection against decay and rot, as well as mildew.
- Use on bare wood above ground - wood siding, decks, roof shingles, outdoor furniture, fences.
- Now with more powerful water repellents to keep water out and protect against cracking and splitting; exceeds Federal Specification TT-W-5726 for water repellency.
- Now with special ingredients to make water bead up and roll off twice as long to protect wood.
- Now may be applied immediately to new wood.
- New advanced formula has lower odor, is nonflammable and safer to use.
- Lets wood gray and weather naturally.
- Easy to use: apply by spray, brush or dip; now conveniently cleans up with soap and water.
- Recommended as a primer before paint to minimize blistering and peeling due to water absorption, and to provide decay resistance.

Formulated to meet the strictest Volatile Organic Compound (VOC) air pollution regulations in the United States. VOC's contained in this product are below 350 grams/kiliter or 2.9 pounds/gallon.

For preservation below ground and for wood in contact with water, use Cuprinol® No. 10 Green Wood Preservative.

To protect wood from turning gray, use Cuprinol New Look™ Wood Finish.

Use Cuprinol® REVIVE Easy Deck Cleaner to remove dirt and stains caused by mildew and algae - leaving a fresh, natural look.

BEST AVAILABLE COPY

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PREPARATION: THIS PRODUCT MUST BE APPLIED OUT-OF-DOORS TO WOOD INTENDED FOR EXTERIOR USE. NOT FOR INTERIOR USE. This product can be used for all suitable above ground applications. (Use Cuprinol® No. 10 Green Wood Preservative where any portion of the wood will be below ground.) Use on cedar, redwood, pressure-treated and most other woods. Do not apply over hardboard or particle board. Do not use on wood that will be in contact with food, feed or potable water, or where prolonged skin contact is expected. Wood may be damp but not wet and must be free of bark, mildew and any finish. May be applied immediately to new wood. Before and during use, thoroughly mix contents of can. *Do not mix with any other products. Do not thin.* Product appears milky in the can but dries clear.

This preservative should not be applied to a mildewed surface. Test for mildew by applying a 50/50 solution of bleach and water. Mildew is present if the area lightens. Spray all mildew-infected surfaces with a solution of 1 qt. household bleach and 3 qts. warm water. Let stand for 30 minutes, then rinse with clean water.

Redwood and cedar contain natural extractives. To minimize extraction discoloration, apply a solution of 1 part oxalic acid and 9 parts water. Let it sit for half an hour. Then rinse with clean water.

APPLICATION: Apply by synthetic brush, spray or dip. For best results, apply when surface temperatures are between 50° and 90° and will not fall below 40° during 24 hours after application. Thoroughly cover cut ends with two coats. The more preservative absorbed by the wood, the longer and more effective the protection. If the first coat is quickly absorbed, apply a second coat at any time after the initial application has dried to the touch. **DO NOT** apply more than two coats. Treat to saturation, but be sure to pick up puddles with a brush. On initial treatment of new wood siding, two coats are recommended. When dipping, allow to soak for 3 minutes. Use only one thin coat if used as a primer before painting. Wait at least 24 to 36 hours after application before painting with a good quality oil-based paint or primer. During humid conditions a longer drying time may be necessary. Wait 6 to 12 months before applying latex paints or clear finishes.

We recommend that wood be re-treated within 3 years. Roofs should be re-treated within 2 years. Areas subject to direct water contact or severe exposure may require an earlier reapplication.

COVERAGE: Ranges from 150-300 sq. ft. per gallon depending on wood porosity, surface texture, and dryness of wood. Cuprinol® Siding Clear Preservative dries to the touch in 5 hours but thorough drying requires 24 hours.

CLEAN UP: Clean brushes and tools immediately after use with soap and water. If clean-up is delayed, use mineral spirits or paint thinner.

CAS No. _____ Ingredient

7732-18-5 Water

Unknown Alkyd Polymer

111-76-2 2-Butoxyethanol

8002-74-2 Paraffin Wax

VOC: Less than 350 gms/L - 2.92 lbs/gal

NON-PHOTOCHEMICALLY REACTIVE

P020047

PRECAUTION: Avoid contact with skin or clothing. Wash thoroughly with soap and water. If irritation occurs, discontinue use and consult a physician. For more information, see the Safety Data Sheet (SDS) on the back of the can.


STORAGE: Store in a cool, dry place. Do not store in areas where the temperature may rise above 100°F. Do not store in areas where the product may be exposed to direct sunlight. Do not store in areas where the product may be exposed to moisture.

LIMITED WARRANTY: Cuprinol® products are warranted to be free from defects in material and workmanship under normal conditions of use. This warranty does not cover damage caused by misuse, abuse, or neglect. Some states do not allow the exclusion or limitation of incidental or consequential damages. For more information, see the Safety Data Sheet (SDS) on the back of the can.

WARNING: This product contains chemicals known to the State of California to cause cancer or reproductive toxicity. For more information, see the Safety Data Sheet (SDS) on the back of the can.

Cuprinol®
101 P
Cleveland, OH

Siding Clear Preservative

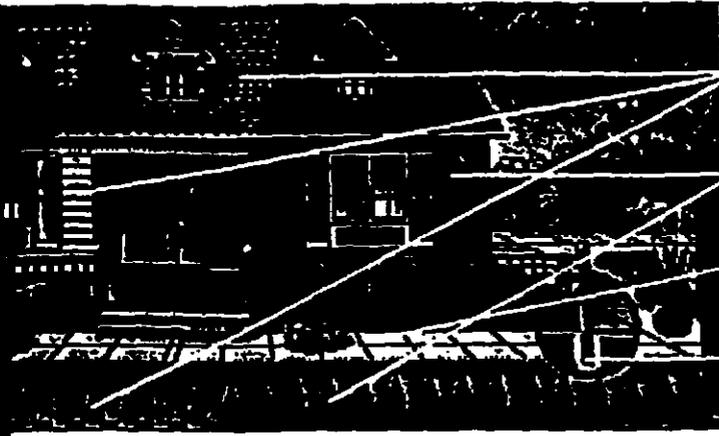

- Siding Clear Preservative*
- Siding Stain & Preservative*
- Masonry & Concrete Seal*
- No. 10 Green Preservative*

ABOVEGROUND Wood siding, wood roof shingles, fences

Protects against rot.

is an effective wood preservative
 against rot, mold, and mildew.
 on shingles, outdoor furniture, fences,
 and protect against cracking
 and water repellent.
 will last as long as long to protect wood.

is safe to use.
 easily cleans up with soap and water.
 prevents staining and peeling due to water.
 (VOC) air pollution regulations
 below 350 grams/liter or 2.9

For water, use Cuprinol® No. 10
 Wood Finish.
 and stains caused by mildew and

is inconsistent with its labeling.
DOORS TO WOOD INTENDED FOR
 to be used for all suitable above ground
 where any portion of the wood will
 and most other woods. Do not apply
 if it will be in contact with food, feed or
 Wood may be damp but not wet and
 immediately to new wood. Before and
 any other products. Do not thin.

Test for mildew by applying a 50/50
 solution. Spray all mildew-infected sur-
 face with water. Let stand for 30 minutes, then

For extraction discoloration, apply a solu-
 tion. Then rinse with clean water.
 If results, apply when surface temper-
 ature is 24 hours after application.

For active absorption by the wood, the
 active is absorbed, apply a second coat
 DO NOT apply more than two coats.

On initial treatment of new wood
 soak for 3 minutes. Use only one thin
 coat. Hours after application before paint-
 ing. Under conditions a longer drying time may
 be required for clear finishes.

Wood should be re-treated within 2 years.
 Some woods require an earlier reapplication.
 depending on wood porosity, surface texture,
 and exposure to the touch in 5 hours but thorough

Wash with soap and water. If clean-up is

PRECAUTIONARY STATEMENTS: HAZARDS TO HUMANS AND DOMESTIC ANIMALS.
CAUTION: Keep out of reach of children. Harmful if swallowed. Avoid breathing spray mist or contact with eyes, skin or clothing. Use out-of-doors only. Wear goggles, rubber gloves and protective clothing when applying or handling freshly treated lumber. Wash thoroughly with soap and water after handling and before smoking or eating.
FIRST AID: If swallowed immediately drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person. Get medical attention. If in eyes: Flush with plenty of water. Get medical attention. If on skin: Wash skin thoroughly with soap and water. Get medical attention if irritation persists. If inhaled: Remove victim to fresh air. Resuscitate if necessary. Get Medical attention.
ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. For terrestrial uses, do not apply directly to water, or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment wash waters.

STORAGE & DISPOSAL:
STORAGE: Close container tightly and store upright to prevent leakage. Do not store near excessive heat, sparks or flames. Avoid storage near food or food products. **KEEP FROM FREEZING.** Soak up spills or leaks with sand, dirt or synthetic absorbent.
PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.
CONTAINER DISPOSAL: Do not re-use original container. Triple rinse (or equivalent), then offer for recycling, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities.

LIMITED WARRANTY
 Cuprinol Group will replace this product if it is shown to be defective within one year of the date of purchase. Claims must be sent within that warranty period, together with proof of purchase, to: Cuprinol Group, 14 Midland, 101 Prospect Ave., Cleveland, OH 44115.
 This warranty does not apply if the product is not used as directed. THE DURATION OF ANY IMPLIED WARRANTIES IS LIMITED TO THE DURATION OF THIS LIMITED WARRANTY. CUPRINOL'S LIABILITY UNDER ANY WARRANTY, WHETHER EXPRESSED OR IMPLIED, IS LIMITED SOLELY TO REPLACEMENT OF THE PRODUCT AND DOES NOT INCLUDE LABOR OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow limitations on how long an implied warranty lasts or exclusions or limitations of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.
 For consumer information, call Cuprinol®, Customer Service 1-800-424-5837

SATISFACTION GUARANTEED

When used according to label directions, if this product fails to perform, Cuprinol will furnish an equivalent amount of new product at no cost or will refund the purchase price upon proof of purchase. This guarantee does not include labor or cost of labor for the application of product.

Cuprinol Group
 101 Prospect Avenue
 Cleveland, Ohio 44115

BEST AVAILABLE COPY

