

577-544

5-13-2003

1/8



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF
PREVENTION, PESTICIDES
AND TOXIC SUBSTANCES

May 13, 2003

Ms. Jamie Zajac
Regulatory Affairs Specialist
Sherwin-Williams Diversified Brands
601 Canal Road
Cleveland, OH 44113

Subject: Notification Application per PR Notice 2001-6
Cuprinol Stain & Wood Preservative
EPA Registration No. 577-544
Application dated April 23, 2003

Dear Ms. Zajac:

This acknowledges receipt of your notification of label changes submitted under the provision of PR Notice 2001-6, FIFRA sections 12 (c) 14.

Proposed Notification

- revised labeling (disposal instructions)

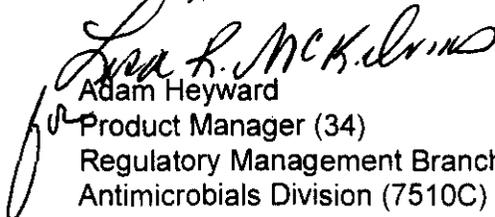
General Comments

Based on a review of the material submitted, the following comments apply.

The notification application is acceptable and a copy has been inserted in your file for future reference.

Should you have any questions or comments concerning this letter, please contact me at (703) 308-6422, or Lisa McKelvin at (703) 308-7496.

Sincerely,


Adam Heyward
Product Manager (34)
Regulatory Management Branch II
Antimicrobials Division (7510C)

FRONT OF LABEL

CUPRINOL® SIDING STAIN & PRESERVATIVE

(Solid or Semi-Transparent)

**Stains and Seals water out. Resists mildew.
Keeps water out. Protects against mildew and rot.
Stains, seals and preserves all in one!
Preservative fights mildew, rot and decay.
Penetrates to Protect Against Rot and Decay
Colorfast Pigments Provide Long Lasting Color**

If Semi-transparent:

Color shows both the wood grain and texture

If Solid Color:

Color hides the wood grain but shows the texture

If Deck:

Stands up to heavy foot traffic

NOTIFICATION
Date Reviewed: 5/13/03
Reviewed By: L. J. W. Helms

Oil Base Water Cleanup

We Promise the Best®

KEEP OUT OF REACH OF CHILDREN

CAUTION

See back panel for additional Precautionary Statements

ACTIVE INGREDIENTS

Bis (tributyltin) oxide..... 0.30%

Chlorothalonil (Tetrachloroisophthalonitrile).. 0.70%

OTHER INGREDIENTS..... 99.00%

TOTAL.....100.00%

EPA Reg. No. 577-544

EPA Est. No. 577-GA-1, 577-IL-1, 577-IL-2, 577-TX-1, 577-KY-1, 577-KS-1, 577-NC-1, 577-OH-1, 577-MD-1, 577-NJ-1, 577-FL-1

____ Nt. Wt.

.....
.....
.....
.....
.....
.....
.....

4/8

New Look
Wood Finish

Deck Stain

Revive
Deck Cleaner

Deck Clear
Seal



Siding Clear
Preservative

Siding Stain
& Preservative

Masonry &
Concrete Seal

No. 10 Green
Preservative

Coverage

On smooth surfaces apply at a rate of approximately 300 sq. ft. per gallon; on rough surfaces at approximately 150 sq. ft. per gallon.

Preparation

For color uniformity, mix all cans together before use and occasionally stir during application. Test for absorbency by sprinkling a few drops of water on the wood. If water is absorbed into the surface, the surface is ready to accept the stain; if not, wait a few weeks and test again before applying. A sample brushout is recommended. The colors will vary somewhat on different woods. Re-coating over other colors will affect the color.

How to Use

Before and during use, thoroughly mix contents of can.

If Semi-Transparent and Solid Color: Apply by synthetic brush, spray, Pad or dip(siding and trim 15-30 seconds). Back brushing is recommended after spraying or dipping to insure a uniform appearance.

If Deck: Apply by synthetic bristle brush, pad or sprayer. Back brushing is recommended after spraying to insure a uniform appearance.

If you choose to apply with a roller, make sure that you backbrush the surface to insure consistency. Seal the cut ends and joints with two coats to prevent water entry. When applying, work across the length of the board. To avoid lap marks, maintain a wet edge. Do not apply in direct sunlight. Do not over apply. Over-application may cause streaking and prolong the drying time.

If Deck: leave blank

If Semi-Transparent or Solid Color: A second coat may be necessary if the first coat is quickly absorbed. If a second coat is desired, the coat should be applied within 24 hours of the first coat. The second coat may produce a more intense color.

When adequately absorbed by the wood, the stain dries to a flat finish. Do not thin or mix with any other product. Depending on the type of wood, the product dries to touch in 5 hours, but thorough drying requires 24 hours.

Clean Up

Clean brushes and tools with soap and water immediately after use. If clean-up is delayed, use mineral spirits. Close container after each use.

Ideal Weather Conditions

For best results, apply when surface temperatures are between 50°F and 90°F and will not fall below 45°F for at least 24 hours after the application. Humidity levels should be below 70% to achieve proper drying. Do not apply if rain is forecasted within 24 hours after the application.

STORAGE AND DISPOSAL

Storage: Do not store near feed or food products. **Disposal: If empty:** Do not reuse this container. Place in trash or offer for recycling if available. **If partly filled:** Call your local solid waste agency for disposal instructions. Never place unused product down any indoor or outdoor drain.

SATISFACTION GUARANTEED

When used according to label instructions, if this product fails to perform, Cuprinol will furnish an equivalent amount of new product at no charge or will refund the purchase price upon proof of purchase. This guarantee does not include labor or the cost of labor for the application of product.

NOTICE: This product contains a chemical(s) known to the State of California to cause cancer.

For consumer information, call Cuprinol Customer Service: 1-800-424-5837.

<u>CAS No.</u>	<u>Ingredient</u>
7732-18-5	Water
Unknown	Alkyd Polymer
111-76-2	2-Butoxy ethanol
8002-74-2	Paraffin wax

VOC less than 350 gms/L – 2.92 lbs./gal
NON-PHOTOCHEMICALLY REACTIVE
KEEP FROM FREEZING
Stock Number (e.g. H021047)

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

CAUTION: Causes moderate eye irritation. Avoid contact with eyes, skin or clothing
Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

FIRST AID

IF IN EYES:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

IF ON SKIN OR CLOTHING:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish, aquatic invertebrates and marine/estuarine organisms. Do not apply directly to water or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water by cleaning of equipment or disposal of wastes.

The Sherwin-Williams Company
101 Prospect Avenue, NW
Cleveland, OH 44115-1075

BACK OR SIDE OF LABEL:

If Semi-Transparent and Solid Color: USE ON WOOD SIDING, SHAKES AND FENCES. Do not Use on decks and outdoor furniture.

If Deck: USE ON DECKS AND OUTDOOR FURNITURE.

Heavy Duty Protective Coating

If Semi-Transparent or Deck: Lets Natural Wood Grain Show Through While Providing UV Protection

If Solid Color: Hides Unsightly Surface Defects. Covers Wood Grain While Letting Texture Show Through

Maximum Water Repellency

Penetration of an Oil – Easy Soap and Water Clean Up

THE CUPRINOL PROMISE

We promise that Cuprinol products will save you time and help protect and beautify wood. We also promise that Cuprinol products will perform to your satisfaction or we'll cheerfully refund your money. If you have any questions about Cuprinol products, where, how and when to use them, please call us at 1-800-424-5837 or visit our website at www.cuprinol.com.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Where to Use

This product must be applied out-of-doors to wood intended only for exterior use. Not for interior use. Use on clean, unprimed wood or on previously

If Semi-Transparent or Deck: (semi-transparent)

If Solid Color: leave blank

Stained surfaces, which are free of all dirt and mildew. Do not use on hardboard or creosote based materials.

If Deck: leave blank

If Semi-Transparent or Solid Color: For decks and outdoor furniture use Cuprinol Deck Stain.