

PM. 33

577-549

2/18/99

Page 1 of 4

LABEL COPY per Amendment 1/18/99  
EPA Reg. No. 577-549  
Page 1 of 4

**Front of Label**

**Pro-Line**  
**Marine Finishes**  
**1080-H Black Hard Vinyl Anti-fouling Paint**

**For protecting underwater hull surfaces from marine fouling**

<b>ACTIVE INGREDIENT</b>	
Cuprous Oxide.....	48.74%
<b>INERT INGREDIENTS.....51.26%</b>	
<b>TOTAL.....100.00%</b>	

**CONTAINS PETROLEUM DISTILLATES**


5 U.S. Gal  
18.92 L

EPA Reg. No.  
577-549

EPA Est. No.  
577-VA-01  
577-NJ-02  
577-CA-04

**KEEP OUT OF REACH OF CHILDREN.**  
**WARNING**  
**FLAMMABLE! VAPOR HARMFUL. IRRITATES EYES, SKIN AND**  
**RESIRATORY TRACT.**  
**SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS**

<b>ACCEPTED</b>
FEB 18 1999
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 577-549

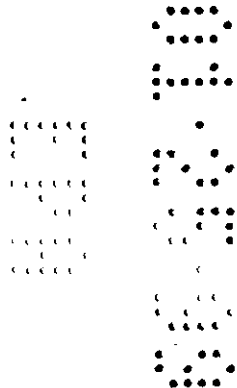

**Back or Side of Label**

**DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling

**THE SURFACE MUST BE FREE OF ALL SURFACE CONTAMINATION AND MOISTURE.**

**APPLICATION:** May be brushed, rolled or sprayed. Stir well before using.

**ALUMINUM:** These products are not for use on aluminum unless a primer is used.

**STEEL:** Bare steel should be sandblasted to a #10 MARINE BLAST to remove all rust and mil scale. After sandblasting, apply 4 coats of Pro-Line 4078 Epoxy Primer giving a total dry mil thickness of at least 12 mils. See note prior to applying anti-fouling paints!

**FIBERGLASS HULL – UNPAINTED:** Scrub hull with a solution of warm water and TSP (tri-sodium phosphate). Rinse with fresh water, sand hull lightly with 80-grit Garnet Paper. Remove dust with clean rag. Apply a uniform coat of Pro-Line 4078 Epoxy Primer. See note prior to applying anti-fouling paints!

**WOOD:** Over bare wood, apply first coat of anti-fouling thinned with Retarder 120 (one quart per gallon of anti-fouling). Apply second coat unthinned.

**OLD ANTI-FOULING:** May be applied over most aged anti-fouling paints when surface is tight, clean and dry.

**RECOAT TIME:** 2 hour minimum – no maximum between anti-fouling paints.


**LAUNCH TIME:** 4 hours minimum after last coat of anti-fouling paints.

**THINNING:** If necessary, use either Reducer 104 or Retarder 120.

**NOTE:** When anti-fouling is applied over Epoxy Primers, the anti-fouling must be applied within 3-5 hours after last coat of Epoxy Primer.

This product is effective in preventing marine growth, such as barnacles, bugulas, etc. Can be used in fresh and salt waters.

**NON-PHOTOCHEMICALLY REACTIVE  
FOR MARINE APPLICATIONS ONLY.**

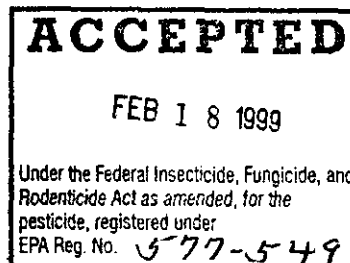

**DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.**

Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

**FIRST AID:**

**IF SWALLOWED:** Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

**IF IN EYES:** Flush with plenty of water. Get Medical Attention.

**IF ON SKIN:** Wash with plenty of soap and water. Get medical attention.

**IF INHALED:** Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**STORAGE AND DISPOSAL**

**PROHIBITIONS:** Do not contaminate potable water, food or feed by storage or disposal. Open dumping is prohibited.

**PESTICIDE DISPOSAL:** Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by federal, state, or local authorities.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**ACCEPTED**

FEB 18 1999

Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 577-549

484

**PRECAUTIONARY STATEMENTS**

**WARNING: HAZARDS TO HUMAN AND DOMESTIC ANIMALS**

**HAZARDS TO HUMANS:** Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Wash contaminated clothing before reuse. Never give anything by mouth to an unconscious person. Call a physician immediately. Avoid storage and usage near food and feed products. When used in confined areas or while spraying and/or sanding boat surface, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health, under the provisions of 30 CFR 11.

**ENVIRONMENTAL HAZARDS**

This product is toxic to fish. Do not contaminate waters by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter waters. Dispose waste debris in an approved landfill.

**PHYSICAL OR CHEMICAL HAZARDS**

**FLAMMABLE.** FLASH POINT APPROXIMATELY 80°F. Keep away from heat and open flame. Pesticide, container or rinse solution that cannot be used according to label instructions must be disposed of according to Federal or approved State procedures under Subtitle C of the Resource Conservation and Recovery Act.

**NOTICE:** This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

The Sherwin-Williams Company  
Cleveland, Ohio 44115

**ACCEPTED**  
FEB 18 1999  
Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 577-549

