

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



United States
Environmental Protection
Agency

Office of Pesticide Programs

The Sherwin-Williams Company
101 West Prospect Avenue
Cleveland, OH
44115-1075

OCT 25 2011

Attention: Madelyn K. Harding

Subject: Red Vinyl Anti-fouling Paint Formula 121
EPA Registration No: 577-550
Notification Dated: October 5, 2011

This will acknowledge receipt of your Notification to update the container handling statement per PR Notice 2007-4 and make other minor changes to the product label, submitted under the provision of FIFRA Section 3(c)(9).

Proposed Notification:

To add two EPA Establishments to the label

General Comments:

Based on a review of the submitted material, the following comments apply:

The Notification dated October 5, 2011, is acceptable, To add the following two Establishment numbers "577-KS-02 and 577-KY-01", to the label. This information has been added to your file.

If you have any questions concerning this letter, please contact Zebora Johnson at (703) 308-63417.

Sincerely

Marshall Swindell
Product Manger (33)
Regulatory Management Branch I
Antimicrobial's Division (7501P)

4
9

Front of Label

Red Vinyl Anti-Fouling Paint Formula 121

For Commercial Coating Label-
Commercial Marine Finishes

For Yacht and Military Specification Coating Labels-
Marine Finishes

For protecting underwater hull surfaces from marine fouling

Product Number (optional)

ACTIVE INGREDIENT
Cuprous Oxide 66.90%
INERT INGREDIENTS.....33.10%
TOTAL.....100.00%

Copper as metallic59.42%
CONTAINS PETROLEUM DISTILLATES

5 U.S. Gal
18.92 L


EPA Reg. No.
577-550

EPA Est. No.
577-VA-01
577-NJ-02
577-CA-03
577-GA-01
577-KS-02
577-KY-01

For Yacht and Commercial Coating Labels-
VOC: 296 g/L (2.5 lbs./gal.)

(VOC WILL VARY DEPENDING ON SPECIFIC COLOR)

KEEP OUT OF REACH OF CHILDREN.
WARNING
FLAMMABLE! VAPOR HARMFUL. IRRITATES EYES, SKIN AND
RESPIRATORY TRACT.
SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

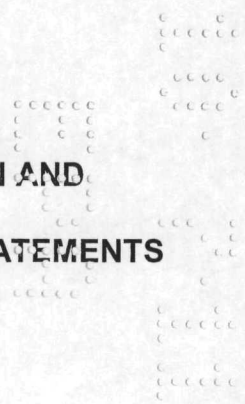

5
9

Back or Side of Label

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This label must be in the possession of the user at the time of pesticide application.

For Yacht and Commercial Coating Labels-
FOR MORE DETAILED INSTRUCTIONS CONTACT THE SHERWIN-WILLIAMS COMPANY.

For Military Specification Label-
THE SURFACE MUST BE FREE OF ALL SURFACE CONTAMINATION AND MOISTURE.

For Yacht and Commercial Coating Labels-
THE SURFACE MUST BE FREE OF ALL SURFACE CONTAMINATION AND MOISTURE BEFORE APPLICATION OF PRIMER OR ANTI-FOULING PAINTS.

For Yacht Coating Label-
RECOMMENDED PRIMERS: Y 3060 Series, Y 4060 Series, Y 5070 Series and Y 4078 Epoxy Primer. Apply one or more coats of epoxy primer at a minimum of 4 dry mils per coat. Anti-fouling must be applied to final coat of epoxy while epoxy is still tacky. When epoxy can be touched firmly with the fingertips leaving an impression without having any of the epoxy adhering to the fingertips, proper adhesion will be achieved.

For Commercial Coating Label-
RECOMMENDED PRIMERS: 3000 Series, 4000 Series, 5000 Series and 4018 Epoxy Primer. Apply one or more coats of epoxy primer at a minimum of 4 dry mils per coat. Anti-fouling must be applied to final coat of epoxy while epoxy is still tacky. When epoxy can be touched firmly with the fingertips leaving an impression without having any of the epoxy adhering to the fingertips, proper adhesion will be achieved.


For Military Specification Label-
OLD ANTI-FOULING: May be applied over most aged soft-sloughing type anti-fouling paints when surface is tight, clean and dry. Do not apply over vinyl anti-fouling paints.

For Yacht and Commercial Coating Labels-
OLD ANTI-FOULING: This product may be applied over most tightly adhering anti-fouling paints. If old anti-fouling is questionable, perform adhesion test. DO NOT APPLY OVER SOFT SLOUGHING TYPE ANTI-FOULING PAINTS.

For Military Specification Label-
RECOAT TIME: 2 hour minimum - No maximum between anti-fouling paints.

For Yacht and Commercial Coating Labels-
RECOAT TIME: 2 hour minimum, if spray applied. Otherwise, 4 hour minimum. No maximum between anti-fouling paints.

For Military Specification Label-
APPLICATION: May be brushed, rolled or sprayed. Stir well before using.

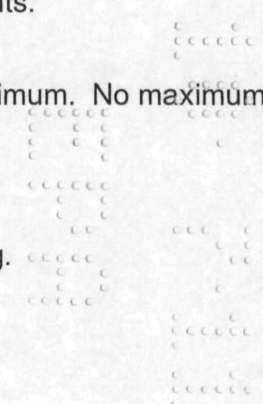

For Yacht Coating Labels-

APPLICATION: Brush, roller (3/8 inch nap lint free cover), conventional spray, or airless spray. Stir well before using. NOTE: Anti-fouling paints are designed to be applied at 3 to 5 dry mils or 5 to 8 wet mils per coat. If anti-fouling paint is not applied at proper mil thickness, effectiveness of the coating will be reduced.

TEMPERATURE RANGE / RELATIVE HUMIDITY RANGE: Minimum 40° F / R.H. 50%

For Commercial Coating Labels-

APPLICATION: Apply by conventional or airless spray. Stir well before using. NOTE: Anti-fouling paints are designed to be applied at 3 to 5 dry mils or 5 to 8 wet mils per coat. If anti-fouling paint is not applied at proper mil thickness, effectiveness of the coating will be reduced.

TEMPERATURE RANGE / RELATIVE HUMIDITY RANGE: Minimum 40° F / R.H. 50%

For Military Specification Label-

ALUMINUM: These products are not for use on aluminum unless a primer is used.

For Yacht and Commercial Coating Labels-

ALUMINUM: These products are not for use on aluminum unless a minimum of 15 dry mils of epoxy primer is used and a proper amount of zinc anodes. For more information contact your Pro-Line® technical representative.

For Military Specification Label-

STEEL: Bare steel should be sandblasted to a #10 MARINE BLAST to remove all rust and mill scale. After sandblasting, apply 4 coats of Mil-P-24441 Epoxy Primer, giving a total dry mil thickness of at least 12 mils. See **note** prior to applying anti-fouling paints!

For Yacht Coating Label-

STEEL: Prepare surface as per SSPC or NACE Standards, such as SSPC-SP10, NACE 2, SSPC-SP6, NACE 3, SSPC-SP12, NACE 5, SSPC-SP11. Surface Profile Range: 1.5-3.5. After surface preparation apply Pro-Line® Epoxy primers Y3060series, Y4060 series, Y5070 series or Y4078, giving a total dry mil thickness of at least 15 mils.

For Commercial Coating Label-

STEEL: Prepare surface as per SSPC or NACE Standards, such as SSPC-SP10, NACE 2, SSPC-SP6, NACE 3, SSPC-SP12, NACE 5, SSPC-SP11. Surface Profile Range: 1.5-3.5. After surface preparation apply Pro-Line® Epoxy Primers 3000 Series, 4000 Series, 5000 Series, or 4018, giving a total dry mil thickness of at least 15 mils.

For Yacht Coating Label-

GELCOAT: To remove dirt, grease, oil and water-soluble mold release agents use Pro-Line® 747 All Purpose Cleaner. To remove solvent based mold release agents use Pro-Line® Y25 Prep Solvent. Be sure to change wiping rag frequently. Sand surface with 80 grit abrasive paper. Remove all sanding dust prior to painting. Apply one or more coats of Pro-Line® epoxy primer at 4 dry mils per coat.

For Military Specification Coating-

WOOD: Over bare wood, apply first coat of anti-fouling thinned with Seaguard® K134 (one quart per gallon of anti-fouling). Apply second coat unthinned.

7
9

For Yacht Coating Label-

WOOD: Over bare wood, primer is not necessary. Apply first coat of anti-fouling thinned 30% with Pro-Line® Y20 Vinyl Retarder. Apply second coat full strength or reduced up to 5% percent with Y4 Vinyl Reducer (spray) or Y20 Vinyl Retarder (Brush or Roller).

For Commercial coating-

WOOD: Over bare wood, primer is not necessary. Apply first coat of anti-fouling thinned 30% with Pro-Line® Retarder #20. Apply second coat unthinned.

For Military Specification Coating-

FIBERGLASS HULL – UNPAINTED: Scrub hull with a solution of warm water and TSP (tri-sodium phosphate). Rinse with fresh water, sand hull lightly with 80-grit Garnet paper. Remove dust with clean rag. Apply a uniform coat of Mil-P-24441 Epoxy Primer. See **note** prior to applying anti-fouling paints.

For Military Specification Coating-

LAUNCH TIME: 4 hours minimum after last coat of anti-fouling paints.

For Yacht and Commercial Coating Labels-

LAUNCH TIME: 4 hours minimum after last coat of anti-fouling paints (overnight is recommended).

For Military Specification Coating-

THINNING: If necessary, use either *Seaguard R7 K133* or *R7 K134*.

For yacht coating-

THINNING: If necessary, use up to 5% Pro-Line® #Y4 or #Y20 Vinyl Retarder for spray applications or #Y20 Vinyl Retarder for brush or roller applications.

For Commercial coating-

THINNING: Not recommended

For Military Specification Coating-

NOTE: When anti-fouling is applied over Epoxy Primers, the anti-fouling must be applied within 3-5 hours after last coat of Epoxy Primer

This product is effective in preventing marine growth, such as barnacles, bugulas, etc.
Can be used in fresh and salt waters.

NON-PHOTOCHEMICALLY REACTIVE
FOR MARINE APPLICATIONS ONLY

DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.

Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

8
9

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL

Pesticide that can not be used according to label instructions must be disposed of according to federal, state or local procedures under the Resources Conservation and Recovery Act.

CONTAINER DISPOSAL

Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

FIRST AID

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF IN EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a *poison control center or doctor*.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.

HAVE THE PRODUCT CONTAINER OR LABEL WITH YOU WHEN CALLING A POISON CONTROL CENTER OR DOCTOR, OR GOING FOR TREATMENT.

Note to Physician

Contains petroleum distillate - vomiting may cause aspiration pneumonia.



