

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

MAY 15 1997

Madelyn K. Manning
The Sherwin-Williams Company
101 Prospect Ave., N.W.
Cleveland, OH. 44115-1075


Subject: Black Vinyl Antifouling Paint Formula 129
Military Specification Mil-P-15931F, Type II
Class II
EPA Registration No. 577-551
Notification Per PR-Notice 95-2
Your Notification Dated April 22, 1997

Dear Ms. Harding:

This will acknowledge receipt of your notification to add the brand name "Pro-line Mil-P-15931F, Type II, Class 2, Formula 129A Pro-Line No. 1069F Black Vinyl Antifouling Paint", change the EPA Registration and the EPA Establishment Number to the newly assigned number, change the signature line and address to The Sherwin-Williams Company and revise the California warning statement on the rear panel of the label submitted under the provisions of FIFRA section 3(c)9. Based on a review of the submitted material, the following comments apply.

The application is acceptable and the notification has been made a part of the records for this file.

Sincerely,




Marshall Swindell
Notification Coordinator
Antimicrobial Program Branch
Antimicrobial Division (7510W)

| CONCURRENCES | | | | | | | |
|--------------|----------|--|--|--|--|--|--|
| SYMBOL | 7570W | | | | | | |
| SURNAME | P. Hardy | | | | | | |
| DATE | 5/13/97 | | | | | | |

Please read Instructions on reverse before completing form.

Form Approved. OMB No. 2070-0060. Approval expires 11-30-93

| | | | |
|---|--|--|--|
| (A)  | United States Environmental Protection Agency Office of Pesticide Programs (H7505C) Washington, DC 20460 | <input type="checkbox"/> Registration <input type="checkbox"/> Amendment <input checked="" type="checkbox"/> Other | OPP Identifier Number 154967 |
| | Application for Pesticide: | | |

Section I

| | | |
|--|--|--|
| 1. Company/Product Number 577-551 | 2. EPA Product Manager Marshall Swindell | 3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted |
| 4. Company/Product (Name) Black Vinyl Antifouling Paint Formula 129 Military Specification Mil-P-15931F, Type II, Class II | PM# 31 | |
| 5. Name and Address of Applicant (Include ZIP Code) The Sherwin-Williams Company 101 Prospect Ave., N.W. Cleveland, OH 44115-1075 <input type="checkbox"/> Check if this is a new address | 6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____ | |

Section II

| | |
|--|--|
| <input type="checkbox"/> Amendment - Explain below | <input type="checkbox"/> Final printed labels in response to Agency letter dated _____ |
| <input type="checkbox"/> Resubmission in response to Agency letter dated _____ | <input type="checkbox"/> "Me Too" Application. |
| <input checked="" type="checkbox"/> Notification - Explain below. | <input type="checkbox"/> Other - explain below. |

Explanation: Use additional page(s) if necessary. (For section I and Section II.)
 This application is notification of an additional brand name: **Pro-Line MIL-P-15931F, TYPE II, CLASS 2, FORMULA 129A PRO-LINE NO. 1069F BLACK VINYL ANTIFOULING PAINT**
 It is also notification of minor changes to the label, specifically the EPA Est. No., EPA Reg. No., and manufacturer (due to acquisition of Pro-Line by The Sherwin-Williams Co.); and replacing the California warning statement with a different version.

Section III

| | | | | | |
|---|---|--|-------------------|---|----------------------------------|
| 1. Material This Product Will Be Packaged In: | | | | 2. Type of Container | |
| Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No | Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No | Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No | | <input type="checkbox"/> Metal | <input type="checkbox"/> Plastic |
| | | | | <input type="checkbox"/> Glass | <input type="checkbox"/> Paper |
| | | | | <input type="checkbox"/> Other (Specify) _____ | |
| * Certification must be submitted. | | If "Yes," Unit Package wgt. | No. per container | If "Yes," Package wgt. | No. per container |
| 3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container | | 4. Size(s) of Retail Container | | 5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product | |
| 6. Manner In Which Label Is Affixed To Product <input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled <input type="checkbox"/> Other (_____) | | | | | |

Section IV

| | | |
|---|---|--|
| 1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.) | | |
| Name Madelyn K. Harding | Title Admin., Product Compliance & Registrations | Telephone No. (Include Area Code) 216/563-2630 |
| Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law. | | 6. Date Application Received (Stamped) |
| 2. Signature <i>Madelyn K. Harding</i> | 3. Title Admin., Product Compliance & Registrations | |
| 4. Typed Name Madelyn K. Harding | 5. Date 4-22-97 | |

EPA ESTABLISHMENT NO. 677-CA-04

PRO-LINE

KEEP OUT OF REACH OF CHILDREN.

WARNING

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

Technical Coatings

PRECAUTIONARY STATEMENTS

WARNING: (Hazards to Humans and Domestic Animals)
HAZARDS TO HUMANS: Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Wash contaminated clothing before reuse. Never give anything by mouth to an unconscious person. Call a physician immediately. Avoid storage and usage near food and feed products. When used in confined areas or while spraying and/or sanding boat surface, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11.


ENVIRONMENTAL HAZARDS:

This material is toxic to fish. Do not contaminate waters by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter waters. Dispose wastes debris in an approved landfill.

Physical or Chemical Hazards

FLAMMABLE. FLASH POINT APPROXIMATELY 80° F.
 Keep away from heat and open flame.

Pesticide container or rinse solution that cannot be used according to label instructions must be disposed of according to Federal or approved State procedures under Subtitle C of the Resource Conservation and Recovery Act.

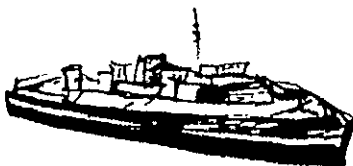

MIL-P-15931F, TYPE II, CLASS 2, FORMULA 129A
 PRO-LINE NO. 1069F
 BLACK VINYL ANTIFOULING PAINT

For protecting underwater hull surfaces from marine fouling and slime
 ACTIVE INGREDIENTS

| | |
|----------------------------|---------|
| CUPROUS OXIDE..... | 55.70% |
| INERT INGREDIENTS..... | 44.30% |
| TOTAL..... | 100.00% |
| FREE ELEMENTAL COPPER..... | .558% |

CONTAINS PETROLEUM DISTILLATES

NET CONTENTS: LBS. Gal.

BEST AVAILABLE COPY

394

EPA REGISTRATION NO. 577-551

®

FOLLOW ALL SAFETY AND HEALTH REGULATIONS: PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

IF IN EYES: Flush with plenty of water. Get medical attention.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

WARRANTY: Pro-Line warrants that the contents of this container conform to the product's description on this label.

THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. IN NO EVENT SHALL PRO-LINE BE LIABLE FOR ANY INCIDENTAL SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY NATURE WHATSOEVER INCLUDING WITHOUT LIMITATIONS LOSS OR USE OF LOST PROFITS.

This product may not carry the implied warranties of the uniform commercial code.

STORAGE AND DISPOSAL

Do not contaminate water, food, feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL

Paint that cannot be used according to label instructions must be disposed of according to Federal, State or local procedures under the Resources Conservation and Recovery Act.

CONTAINER DISPOSAL

Dispose of container by triple rinse and recycling or puncturing and disposing in a sanitary landfill or by other approved State and local procedures. If burned stay out of smoke.

**FOLLOW PRO-LINE PAINT BOTTOM COATING GUIDE
DIRECTIONS FOR USE OF PRO-LINE PAINT**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This label must be in the possession of the user at the time of pesticide application.
THE SURFACE MUST BE FREE OF ALL SURFACE CONTAMINATION AND MOISTURE.

**MIL-P-15931F, TYPE II, CLASS 2, FORMULA 129A
PRO-LINE NO. 1069F BLACK VINYL ANTIFOULING PAINT**

APPLICATION: May be brushed, rolled or sprayed. Stir well before using.

ALUMINUM: These products ARE NOT FOR USE ON ALUMINUM.

STEEL: Bare steel should be sandblasted to a # 10 MARINE BLAST to remove all rust and mill scale. After sandblasting, apply 4 coats of EPOXY PRIMER #4000 series, giving a total dry mil thickness of at least 12 MILS. See note prior to applying antifouling paints!

FIBERGLASS HULL — UNPAINTED: Scrub hull with a solution of warm water and TSP. Rinse with fresh water, sand hull lightly with 80-grit Garnet Paper. Remove dust with clean rag. Apply a uniform coat of #4000 Primer. See note prior to applying antifouling paints!

WOOD: Over bare wood, apply first coat of ANTIFOULING thinned with PRO-LINE #20 (one quart per gallon of antifouling). Apply second coat unthinned.

OLD ANTIFOULING: May be applied over most aged soft-sloughing type antifouling paints when surface is light, clean and dry. Do not apply over vinyl antifouling paints.

FERRO-CEMENT: Not recommended

RECOAT TIME: 2 hour minimum — no maximum between antifouling paints.

LAUNCH TIME: 4 hours after last coat of antifouling paint.

THINNING: If necessary use either #4 or #20 thinner.

NOTE: When antifouling is applied over Epoxy Primers, the antifouling must be applied within 3-5 hours after last coat of Epoxy Primer.

This product is effective in preventing marine growth, such as barnacles, bugulas, etc. Can be used in sweet and salt waters.

**NON-PHOTOCHEMICALLY REACTIVE
THE SHERWIN-WILLIAMS COMPANY**

Cleveland, OH 44115

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

BEST AVAILABLE COPY

494