

PM 33

JUL 08 1998

Madelyn Harding
Sherwin Williams Company
EH & RS 440 Midland,
101 West Prospect Avenue,
Cleveland, OH 44115-1075

RE: Black Vinyl Antifouling paint Formula 129
EPA Reg. No. 577-551
Your Notification Dated 6/15/98

The notification referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), as amended, to add the alternate brand name "Sherwin-Williams Seaguard Black Vinyl Antifouling Paint Formula 129A Mil-P-15931F, Type II, Class 2", and minor label changes, is acceptable.

This accepted notification has been made a part of the records for this file.

If you have any questions about the comments in this letter, please feel free to contact Tony Kish at 703-308-9443.

Sincerely,
Marshall Swindell
Marshall Swindell,
Product Manager Team 33,
Regulatory Management Branch I
Antimicrobials Division (7510W)

CONCURRENCES

SYMBOL							
SURNAME							
DATE							

296

Please read instructions on reverse before completing form.

Form Approved OMB No. 2070-0060. Approval expires 11-30-93

(A) 	United States Environmental Protection Agency Office of Pesticide Programs (H7505C) Washington, DC 20460 Application for Pesticide:	<input type="checkbox"/> Registration <input type="checkbox"/> Amendment <input checked="" type="checkbox"/> Other	OPP Identifier Number <div style="font-size: 24pt; text-align: center;">154994</div>
----------------	---	--	---

Section I

1. Company/Product Number 577-551	2. EPA Product Manager Marshall Swindell	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Black Vinyl Antifouling Paint Formula 129	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) The Sherwin-Williams Company EH&RS 440 Midland 101 West Prospect Ave. Cleveland, OH 44115-1075 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section II

<input type="checkbox"/> Amendment - Explain below <input type="checkbox"/> Resubmission in response to Agency letter dated _____ <input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____ <input type="checkbox"/> "Me Too" Application. <input type="checkbox"/> Other - explain below.
---	---

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

Add the brand name "Sherwin-Williams Seaguard Black Vinyl Antifouling Paint Formula 129A Mil-P-15931F, Type II, Class 2" and make minor changes to the label.

Section III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No		<input type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____	
* Certification must be submitted.		If "Yes," Unit Package wgt.	No. per container	If "Yes," Package wgt.	No. per container
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) of Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner In Which Label Is Affixed To Product				<input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled	
				<input type="checkbox"/> Other (_____)	

Section IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Madelyn K. Harding	Title Admin., Product Compliance & Registrations	Telephone No. (Include Area Code) (216) 566-2630

Certification

I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Admin., Product Compliance & Registrations	
4. Typed Name Madelyn K. Harding	5. Date 6-15-98	

3 76

Front of Label

Pro-Line Black Vinyl Anti-Fouling Paint Formula 129 Military Specification MIL-P-15931C, TYPE II, CLASS 2

For protecting underwater hull surfaces from marine fouling and slime.

B50 B 100
6401-82531

ACTIVE INGREDIENT

Cuprous Oxide.....	55.70%
INERT INGREDIENTS.....	44.30%
TOTAL.....	100.00%


FREE ELEMENTAL COPPER..... 0.558%
CONTAINS PETROLEUM DISTILLATES

5 U.S. Gal
18.92 L

EPA Reg. No.
577-551

EPA Est. No.
577-VA-01
577-NJ-02

**KEEP OUT OF REACH OF CHILDREN. WARNING!
FLAMMABLE! VAPOR HARMFUL. IRRITATES EYES, SKIN AND
RESIRATORY TRACT.
SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS**

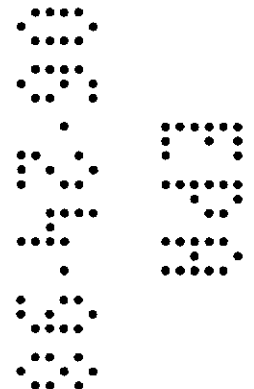

Back or Side of Label

Follow Pro-Line Paint Bottom Coating Guide

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling
This label must be in the possession of the user at the time of pesticide application.

THE SURFACE MUST BE FREE OF ALL SURFACE CONTAMINATION AND MOISTURE.

APPLICATION: May be brushed, rolled or sprayed. Stir well before using.

ALUMINUM: These products ARE NOT FOR USE ON ALUMINUM.

STEEL: Bare steel should be sandblasted to a #10 MARINE BLAST to remove all rust and mil scale. After sandblasting, apply 4 coats of EPOXY PRIMER #4000 series, giving a total dry mil thickness of at least 12 mils. *See note prior to applying antifouling paints!*

FIBERGLASS HULL – UNPAINTED: Scrub hull with a solution of warm water and TSP. Rinse with fresh water, sand hull lightly with 80-grit Garnet Paper. Remove dust with clean rag. Apply a uniform coat of #4000 Primer. *See note prior to applying antifouling paints!*

WOOD: Over bare wood, apply first coat of ANIFOULING thinned with Pro-Line #20 (one quart per gallon of antifouling).

OLD ANTIFOULING: May be applied over most aged soft-sloughing type antifouling paints when surface is tight, clean and dry. Do not apply over vinyl antifouling paints.

FERRO-CEMENT: Not recommended.

RECOAT TIME: 2 hour minimum – no maximum between antifouling paints.

LAUNCH TIME: 4 hours after last coat of antifouling paints.

THINNING: If necessary, use either #4 or #20 thinner.


NOTE: When antifouling is applied over Epoxy Primers, the antifouling must be applied within 3-5 hours after last coat of Epoxy Primer.

This product is effective in preventing marine growth, such as barnacles, bugulas, etc. Can be used in sweet and salt waters.

NON-PHOTOCHEMICALLY REACTIVE

DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.

Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

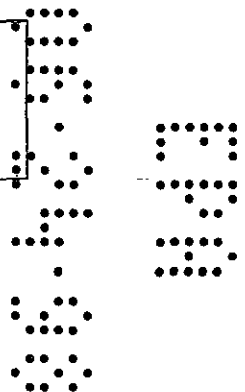

FOLLOW ALL SAFETY AND HEALTH REGULATIONS: PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

IF IN EYES: Flush with plenty of water. Get Medical Attention.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

PRECAUTIONARY STATEMENTS

WARNING: HAZARDS TO HUMAN AND DOMESTIC ANIMALS

HAZARDS TO HUMANS: Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Wash contaminate clothing before reuse. Never give anything by mouth to an unconscious person. Call a physician immediately. Avoid storage and usage near food and feed products. When used in confined areas or while spraying and/or sanding boat surface, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health, under the provisions of 30 CFR 11.


ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not contaminate waters by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter waters. Dispose wastes debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE. FLASH POINT APPROXIMATELY 80°F. Keep away from heat and open flame. Pesticide, container or rinse solution that cannot be used according to label instructions must be disposed of according to Federal or approved State procedures under Subtitle C of the Resource Conservation and Recovery Act.

NOTICE: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

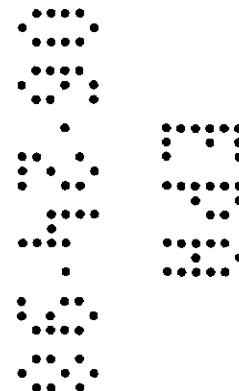

6 9-6

STORAGE AND DISPOSAL PROHIBITIONS

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL

Pesticide that can not used according to label instructions must be disposed of according to federal, state or local procedures under the Resources Conservation and Recovery Act.

CONTAINER DISPOSAL

Dispose of container by triple rinse and recycling or puncturing and disposing in a sanitary landfill or by other approved State and local procedures. If burned stay out of smoke.

The Sherwin-Williams Company
Cleveland, Ohio 44115

