

577-556

10/28/2010

10f6



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

WASHINGTON, D.C. 20460

OFFICE OF
PREVENTION, PESTICIDES
AND TOXIC SUBSTANCES

The Sherwin-Williams Company
101 West Prospect Avenue
Cleveland, OH 44115-1075

OCT 28 2010

Subject: Premium Grade Soft Copper No. 1
EPA Registration Number 577-556
Your Notification Dated August 6th, 2010
EPA Received Date August 9th, 2010

The notification referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, FIFRA, as amended, to update the Container Disposal statements as per PR Notice 2007-4, is acceptable.

A copy of the notification has been made part of the file.

If you have questions concerning this letter, please contact Karen M. Leavy at (703)-308-6237.

Sincerely,

A handwritten signature in black ink, which appears to read "M. Swindell", is positioned above the typed name.

Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobials Division(7510P)



SHERWIN-WILLIAMS®

Environmental, Occupational Health & Regulatory Services
101 Prospect Avenue NW
Cleveland, Ohio 44115-1075
Facsimile: (216) 566-2730

BY FEDERAL EXPRESS

August 6, 2010

Mr. Marshall Swindell (PM 33)
U. S. Environmental Protection Agency
Document Processing Desk (AMEND)
Office of Pesticide Programs (7504P)
Room S4900, One Potomac Yard
2777 Crystal Drive
Arlington, Virginia 22202

RE: EPA Registration Numbers 577-556
Application for Pesticide Amendment – Label Revision Including Requirements under
Per PR Notice 2007-4: Pesticide Management and Disposal; Standards for
Pesticide Containers & Containment
Per PR Notice 2001-4: First Aid Statements

Dear Mr. Swindell,

This letter with the attached Application serves as Application for an Amendment to EPA Registration Numbers 577-556 label. This revision includes changes to the Directions for Use, and changes needed to come into compliance with PR Notice 2001-4 on First Aid Statements and with PR Notice 2007-4 on Container Disposal Statements.


This submission includes five copies of the proposed label.

Thank you for your prompt attention to this matter. If you have any questions regarding this submission, please do not hesitate to contact me at 216-566-2630.

Sincerely,

Madelyn K. Harding, Senior Corporate Manager
Regulatory Affairs

Attachment: Applications for Amendment of EPA Reg. No. 577-556
Five Copies of Proposed Label

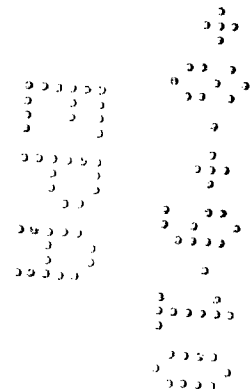

4066

PREMIUM GRADE SOFT COPPER NO.1

N50 R101

ACTIVE INGREDIENT	
CUPROUS OXIDE	23.00%
INERT INGREDIENTS:	77.00%
TOTAL	100 %

This product contains petroleum distillates.

Equivalent to 20% metallic copper


KEEP OUT OF REACH OF CHILDREN

Warning!

Combustible! Vapor Harmful. Irritates Eyes, Skin and Respiratory Tract.
See Side Panel for Additional Precautionary Statements

EPA Registration No. 577-556
EPA Est. No. 577-VA-01

50 Gallons Net Contents

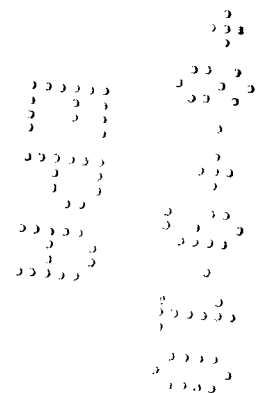

**SEAGUARD#1 PREMIUM GRADE ANTI-FOULING
"SOFT" COPPER FREE ERODING FORMULATION**

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Recommended: Seaguard Premium Grade Anti-fouling, Soft Copper is to be used on wood surfaces. Seaguard Premium Grade Anti-fouling is a soft copper formulation that allows the coating to dissolve freely, thus preventing any residual film build-up. The anti-fouling properties are uniquely tailored for the east coast of the United States.

Surface Preparation: For wood surfaces-clean surface thoroughly with water and scrub with stiff bristle brush. Any fouling residue should be removed with a wire brush before applying Seaguard Premium Grade Anti-fouling.

Application: Seaguard Premium Grade Anti-fouling is formulated to be applied by spray, brush, or roller. If applied by spray, an agitator equipped spray pot should be used, with the agitator running just fast enough to keep the anti-fouling pigments in uniform suspension. Thinning is not usually necessary, but Seaguard No. 800 Thinner [Sherwin-Williams R2K4 150 Flash Naphtha] may be used. For optimum anti-fouling performance, 2 coats of Premium Grade Anti-fouling should be applied at 2.0 mil Dry Film Thickness each. Vessel launching should be made within 7 days of anti-fouling application.

Allow to dry 4-6 hours between coats.

For professional use only.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

PESTICIDE DISPOSAL: Pesticide that can not be used according to label instructions must be disposed of according to federal, state or local procedures under the Resources Conservation and Recovery Act.

CONTAINER DISPOSAL

Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.

Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

HAVE THE PRODUCT CONTAINER OR LABEL WITH YOU WHEN CALLING A POISON CONTROL CENTER OR DOCTOR, OR GOING FOR TREATMENT.

Contains petroleum distillate - vomiting may cause aspiration pneumonia

FLAMMABLE. FLASH POINT APPROXIMATELY 80 °F. Keep away from heat and open flame. Pesticide, container or rinse solution that cannot be used according to label instructions must be disposed of according to Federal or approved State procedures under Subtitle C of the Resource Conservation and Recovery Act.

Manufactured by
The Sherwin-Williams Co.
Portsmouth, Virginia 23704