

DEC 21 1999

Jamie Zajac
The Sherwin-Williams Company
101 Prospect Avenue
Cleveland, Ohio 44115

Dear Mr. Zajac:

Subject: Notification of PR Notice 95-1: Minor labeling changes
Thompson's Wood Protector
EPA Registration No. 577-557
Amendment application of December 7, 1999

This will acknowledge receipt of your notification, to "Satisfaction Guarantee Statement" change, revised seal logo on front panel and revised storage and disposal statement, submitted under the provisions of FIFRA section 3 (c) 9. Based on a review of the material, the following comment apply.

This application is acceptable and has been made a part of the records for this file.

If you have any question concerning this letter, please contact Portia Jenkins at (703) 308-6230.

Sincerely yours,



Adam Heyward
Product Manager 34
Regulatory Management Branch II
Antimicrobials Division (7510C)

CONCURRENCES

| | | | | | | | | |
|---------|--|--|--|--|--|--|--|--|
| SYMBOL | | | | | | | | |
| SURNAME | | | | | | | | |
| DATE | | | | | | | | |

277



United States
Environmental Protection Agency
 Washington, DC 20460

Registration
 Amendment
 Other

OPP Identifier Number
 245275

Application for Pesticide - Section I

| | | |
|--|--|--|
| 1. Company/Product Number 577-557 | 2. EPA Product Manager Adam Heyward | 3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted |
| 4. Company/Product (Name) Thompson's Wood Protector | PM# 34 | |
| 5. Name and Address of Applicant (Include ZIP Code) The Sherwin-Williams Company 101 Prospect Avenue Cleveland, Ohio 44115 <input type="checkbox"/> Check if this is a new address | 6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____ | |

Section - II

| | |
|--|--|
| <input type="checkbox"/> Amendment - Explain below. | <input type="checkbox"/> Final printed labels in response to Agency letter dated _____ |
| <input type="checkbox"/> Resubmission in response to Agency letter dated _____ | <input type="checkbox"/> "Me Too" Application. |
| <input checked="" type="checkbox"/> Notification - Explain below. | <input type="checkbox"/> Other - Explain below. |

Explanation: Use additional page(s) if necessary. (For section I and Section II.) Notification of Satisfaction Guarantee Statement change, revised seal logo on front panel and added sentence to disposal & storage statement, and changed type size of inert and active ingredient. This notification is consistent with the provisions of PR Notice 98-10 and EPA regulations at 40 CFR 152.46, & no other changes have been made to the labeling or the confidential statement of formula of this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statements to EPA. I further understand that if this notification is not consistent with the terms of PR Notice 98-10 & 40 CFR 152.46, this product may be in violation of FIFRA and I may be subject to enforcement action & penalties under sections 12 & 14 of FIFRA.

Section - III

1. Material This Product Will Be Packaged In:

| | | | |
|---|---|--|--|
| Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No | Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No | Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No | 2. Type of Container <input type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____ |
| * Certification must be submitted | | If "Yes" Unit Packaging wgt. No. per container | If "Yes" Package wgt. No. per container |

3. Location of Net Contents Information
 Label Container

4. Size(s) Retail Container

5. Location of Label Directions
 On Label
 On Labeling accompanying product

6. Manner in Which Label is Affixed to Product
 Lithograph
 Paper glued
 Stenciled Other _____

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)

| | | |
|---------------------|--|--|
| Name Jamie Zajac | Title Regulatory Affairs Specialist | Telephone No., (Include Area Code) 216-292-1322 |
|---------------------|--|--|

Certification
 I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.

2. Signature
Jamie Zajac

3. Title
Regulatory Affairs Specialist

4. Typed Name
Jamie Zajac

5. Date
12/7/99

6. Date Application Received (Stamped)
DEC 14 1999

FRONT PANEL:

**Thompson's Wood Protector
Clear Preservative**

Clear

- Waterproofs to prevent moisture damage
- Prevents mildew growth, discoloration and wood rot
- UV protection against graying
- Quick, one-coat coverage
- Long-lasting, penetrating oil



NET ONE U.S. GALLON 3.785 Liters

KEEP OUT OF REACH OF CHILDREN.

CAUTION. **COMBUSTIBLE! VAPOR HARMFUL. IRRITATES EYES, SKIN AND RESPIRATORY TRACT.**

Before using, carefully read Precautionary Statements elsewhere on label.

ACTIVE INGREDIENT:


3-Iodo-2-Propynyl Butyl Carbamate 0.5%

INERT INGREDIENTS: 99.5%

TOTAL: 100.0%

CONTAINS PETROLEUM DISTILLATES.

EPA Reg. No. 577-557, EPA Est. No. 577-MS-01

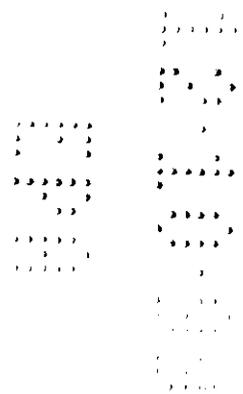

BACK PANEL:

**Thompson's Wood Protector
Clear Preservative**

What is Thompson's Wood Protector Clear Preservative?

Thompson's Wood Protector Clear Preservative is a clear, highly-penetrating, oil-based waterproofing preservative especially formulated for protecting wood above ground level. *This penetrating formula offers three-way protection for wood:*

1. Waterproofing protection that helps prevent warping, shrinking and splitting caused by moisture;
2. Excellent wood preservative that helps prevent the formation of mildew, sapstain and wood rot; and
3. UV sunscreens agents that work to retard color change and damage caused by sunlight and enhance the longevity of the preservative ingredient.

WHERE TO USE:

- Decks -Pressure Treated -Plywood -Outdoor Wood Furniture
 - Doors Lumber -Wood Fences -Other Exterior Wood
 - Particle Board -Wood Shingles -Wood Shakes Surfaces
 - Siding -Barns -Shutters
- Not recommended for use on previously painted or stained wood unless removed prior to use.

HELPFUL HINTS:

- Only one coat is necessary in most applications. Do not saturate surfaces, puddle or build to wet film.
- Excessive oiliness, particularly on horizontal surfaces, may be removed by scrubbing with detergent and water.
- Weathered wood will appear darker after application. A trial patch is recommended before you start.
- Not recommended for previously painted or stained wood unless removed prior to use.
- Overspray of product onto metal or glass should be removed immediately with paint thinner or mineral spirits.
- Cover plants and shrubs. If using a sprayer, move all objects that could come in contact with overspray.
- For best preservative and water repellency action, reapplication is recommended every 3 to 4 years. *For maximum protection from color change and other damage caused by the sun, reapplication is recommended every year. Vertical and horizontal surfaces will experience color changes at different rates.*

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PREPARATION: Wood must be thoroughly dry since Thompson's Wood Protector Clear Preservative will not fully penetrate wet or damp surfaces. Surface should be clean and porous enough to allow penetration. For best results on wood that has been weathered or discolored from mold or mildew, clean with Thompson's Deck Wash according to the package directions and cautions. Let area dry completely before applying Thompson's Wood Protector Clear Preservative.

APPLICATION:

1. Apply when both air and surface temperatures are above 50 Degree F and will remain above 50 degree F for at least 48 hours.
2. Shake well before using. Do not thin.
3. Apply by brush, roller, dipping or spraying.
4. Only 1 light coat is necessary in most applications. Do not saturate surfaces, puddle or build to wet film.

SIDE PANEL:

COVERGE:

Actual coverage will vary depending on wood porosity and surface roughness

Approximate Coverage

| | <u>Sq. Ft./Gal.</u> |
|---|---------------------|
| Cedar, Oak, Redwood, Exotic Woods (i.e. Mahogany) | 300-400 |
| All other woods (i.e., Pine, Pressure-Treated, Plywood) | 200-300 |
| One Coat is Sufficient. | |

DRYING TIME: Allow 24-48 hours. Penetration will vary depending on the porosity and water content of the surface. Wait a minimum of 30 days before painting over Thompson's Wood Protector Clear Preservative with oil-based paints.

CLEAN UP: Clean brushes and equipment with paint thinner or mineral spirits. Overspray or accidental spillage can be wiped up or cleaned immediately with paint thinner or mineral spirits.

For sizes one gallon and less:

STORAGE AND DISPOSAL:

Do not contaminate water, food or feed by storage or disposal. Avoid storage near food or food products. Do not reuse empty container. Securely wrap original container in several layers of newspaper and discard in trash.

For sizes over one gallon:

STORAGE AND DISPOSAL:

Do not contaminate water, food or feed by storage or disposal. Triple rinse (or equivalent). Then offer for recycling or reconditioning, or dispose of in a sanitary landfill, or by incineration if allowed by state and local authorities.

RECYCLING INFORMATION: This can is made from an average of 25% recycled steel (10% post-consumer).

If you have questions regarding this or any other Thompson's product, please call The Thompson's Company Consumer Help Line at 1-800-367-6297.

SATISFACTION GUARANTEE:

The Thompson's Company guarantees that this product will meet your satisfaction. If not, we will refund your purchase price with proof of purchase. If you are not completely satisfied and wish to obtain a refund, please call 1-800-367-6297 with a brief description of your complaint and a technical service specialist will assist you. This guarantee does not include labor or the cost of labor for the application of this product or any direct, incidental, or consequential damages.

The Thompson's Company, Cleveland, OH 44115

Nonphotochemically Reactive

PRECAUTIONARY STATEMENTS:

Hazards to Humans and Domestic Animals

CAUTION! CONTAINS PETROLEUM DISTILLATES. MAY BE HARMFUL IF SWALLOWED. Avoid contact with skin, eyes or clothing. Avoid breathing vapor or spray mist. Use in well ventilated area.

FIRST AID:

Ingestion: Do not induce vomiting. Call physician or Poison Control Center immediately.

Eye Contact: Immediately flush eyes with water, remove contact lenses, and continue to flush eyes for 15 minutes. If irritation persists, get medical attention.


Skin Contact: Wash skin thoroughly with soap and water. Wash contaminated clothing thoroughly with soap and water before reuse.

Inhalation: Remove to fresh air. If necessary, give artificial respiration or oxygen. Call a physician.

Environmental Hazard: Do not apply directly to water, or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water by cleaning of equipment or disposal of wastes.

Physical Hazards: Combustible. Do not use or store near heat or open flame.

NOTICE: Delayed effects from long term exposure. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

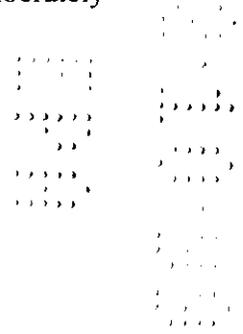

NOTICE: This product contains a chemical known to the State of California to cause cancer.

For the lower VOC version:
Maximum VOC 350 g/L (2.9 lbs./gal.)

For the higher VOC version:
Maximum VOC 550 g/L (4.6 lbs./gal.)

Manufactured by:
The Thompson's Company
Cleveland, OH 44115

Stock No.:
I.C. No.: