

577-557

7/30/2001

1/5

FRONT PANEL:

Thompson's Wood Protector
Clear Preservative

Clear

- Waterproofs to prevent moisture damage
- Prevents mildew growth, discoloration and wood rot
- UV protection against graying
- Quick, one-coat coverage
- Long-lasting, penetrating oil

NET ONE U.S. GALLON 3.785 Liters

KEEP OUT OF REACH OF CHILDREN.
CAUTION.

Before using, carefully read Precautionary Statements elsewhere on label.

ACTIVE INGREDIENT:


3-Iodo-2-Propynyl Butyl Carbamate..... 0.5%

OTHER INGREDIENTS:..... 99.5%

TOTAL: 100.0%

CONTAINS PETROLEUM DISTILLATES.

EPA Reg. No. 577-557, EPA Est. No. 577-MS-01

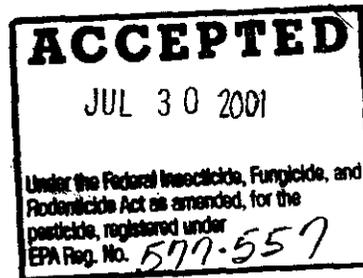

BACK PANEL:

**Thompson's Wood Protector
Clear Preservative**

What is Thompson's Wood Protector Clear Preservative?

Thompson's Wood Protector Clear Preservative is a clear, highly-penetrating, oil-based waterproofing preservative especially formulated for protecting wood above ground level. This penetrating formula offers three-way protection for wood:


1. Waterproofing protection that helps prevent warping, shrinking and splitting caused by moisture;
2. Excellent wood preservative that helps prevent the formation of mildew, sapstain and wood rot; and
3. UV sunscreens agents that work to retard color change and damage caused by sunlight and enhance the longevity of the preservative ingredient.

WHERE TO USE:

- Decks -Pressure Treated -Plywood -Outdoor Wood Furniture
 - Doors Lumber -Wood Fences -Other Exterior Wood
 - Particle Board -Wood Shingles -Wood Shakes Surfaces
 - Siding -Barns -Shutters
- Not recommended for use on previously painted or stained wood unless removed prior to use.

HELPFUL HINTS:

- Only one coat is necessary in most applications. Do not saturate surfaces, puddle or build to wet film.
- Excessive oiliness, particularly on horizontal surfaces, may be removed by scrubbing with detergent and water.
- Weathered wood will appear darker after application. A trial patch is recommended before you start.
- Not recommended for previously painted or stained wood unless removed prior to use.
- Overspray of product onto metal or glass should be removed immediately with paint thinner or mineral spirits.
- Cover plants and shrubs. If using a sprayer, move all objects that could come in contact with overspray.
- For best preservative and water repellency action, reapplication is recommended every 3 to 4 years. For maximum protection from color change and other damage caused by the sun, reapplication is recommended every year. Vertical and horizontal surfaces will experience color changes at different rates.

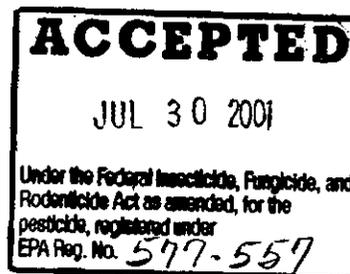

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PREPARATION: Wood must be thoroughly dry since Thompson's Wood Protector Clear Preservative will not fully penetrate wet or damp surfaces. Surface should be clean and porous enough to allow penetration. For best results on wood that has been weathered or discolored from mold or mildew, clean with Thompson's Deck Wash according to the package directions and cautions. Let area dry completely before applying Thompson's Wood Protector Clear Preservative.

APPLICATION:

1. Apply when both air and surface temperatures are above 50 Degree F and will remain above 50 degree F for at least 48 hours.
2. Shake well before using. Do not thin.
3. Apply by brush, roller, dipping or spraying.
4. Only 1 light coat is necessary in most applications. Do not saturate surfaces, puddle or build to wet film.

SIDE PANEL:

COVERAGE:

Actual coverage will vary depending on wood porosity and surface roughness

Approximate Coverage

	<u>Sq. Ft./Gal.</u>
Cedar, Oak, Redwood, Exotic Woods (i.e. Mahogany)	300-400
All other woods (i.e., Pine, Pressure-Treated, Plywood)	200-300
One Coat is Sufficient.	


DRYING TIME: Allow 24-48 hours. Penetration will vary depending on the porosity and water content of the surface. Wait a minimum of 30 days before painting over Thompson's Wood Protector Clear Preservative with oil-based paints.

CLEAN UP: Clean brushes and equipment with paint thinner or mineral spirits. Overspray or accidental spillage can be wiped up or cleaned immediately with paint thinner or mineral spirits.

For sizes one gallon and less:

STORAGE AND DISPOSAL:

Keep away from heat and open flame. Do not reuse empty container. Wrap container and put in trash. Do not contaminate water, food, or feed by storage and disposal.

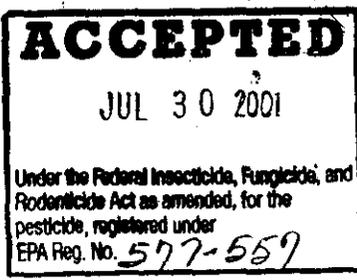

For sizes over one gallon:

STORAGE AND DISPOSAL:

Keep away from heat and open flame. Do not reuse empty container. Do not contaminate water, food, or feed by storage and disposal. Triple rinse (or equivalent). Then offer for recycling or reconditioning, or dispose of in a sanitary landfill, or by incineration if allowed by state and local authorities.

RECYCLING INFORMATION: This can is made from an average of 25% recycled steel (10% post-consumer).

If you have questions regarding this or any other Thompson's product, please call The Thompson's Company Consumer Help Line at 1-800-367-6297.


SATISFACTION GUARANTEE:

The Thompson's Company guarantees that this product will meet your satisfaction. If not, we will refund your purchase price with proof of purchase. If you are not completely satisfied and wish to obtain a refund, please call 1-800-367-6297 with a brief description of your complaint and a technical service specialist will assist you. This guarantee does not include labor or the cost of labor for the application of this product or any direct, incidental, or consequential damages.

The Thompson's Company, Cleveland, OH 44115

Nonphotochemically Reactive

**PRECAUTIONARY STATEMENTS:
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
CAUTION**

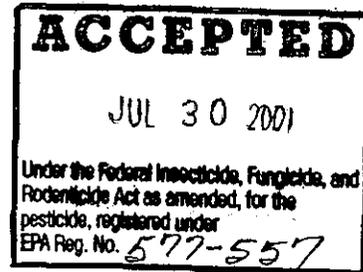

Causes moderate eye irritation. Avoid contact with eyes or clothing. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

FIRST AID
IF SWALLOWED:
-Call a poison control center or doctor immediately for treatment advice.
-Have person sip a glass of water if able to swallow.
-Do not induce vomiting unless told to do so by a poison control center or doctor.
-Do not give anything by mouth to an unconscious person.
IF IN EYES:
-Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
NOTE TO PHYSICIAN: May pose an aspiration pneumonia hazard.

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

ENVIRONMENTAL HAZARD: Do not apply directly to water. Do not contaminate water when disposing of equipment washwater or rinsate.

PHYSICAL AND CHEMICAL HAZARDS: Combustible. Do not use or store near heat or open flame.

NOTICE: Delayed effects from long term exposure. Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

NOTICE: This product contains a chemical known to the State of California to cause cancer.

For the lower VOC version:
Maximum VOC 350 g/L (2.9 lbs./gal.)

For the higher VOC version:
Maximum VOC 550 g/L (4.6 lbs./gal.)

Manufactured by:
The Thompson's Company
Cleveland, OH 44115

Stock No.:
I.C. No.:

