

577-569

9/3/2010

lot 7



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

OFFICE OF
PREVENTION, PESTICIDES AND
TOXIC SUBSTANCES

Ms. Madelyn K. Harding
Regulatory Affairs for,
Sherwin-Williams
Environmental Health & Regulatory Services
Cleveland, OH 44115-1075

SEP - 3 2010

Subject: Copper Paint Number 6 Rappoxy 45 Red
EPA Registration Number 577-569
Your Notification Dated August 3rd, 2010
EPA Received Date August 4th, 2010

The notification referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act(FIFRA), as amended, to revise the product labeling as per PR Notice 2007-4, is acceptable.

The notification has been made part of the file.

If you have any questions concerning this letter, please contact Karen M. Leavy-Munk at (703)-308-6237.

Sincerely,

A handwritten signature in black ink, appearing to read "M. Swindell".

Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobial Division(7510P)

3047



SHERWIN-WILLIAMS®

Environmental, Occupational Health & Regulatory Services
101 Prospect Avenue NW
Cleveland, Ohio 44115-1075
Facsimile: (216) 566-2730

BY FEDERAL EXPRESS

August 3, 2010

Mr. Marshall Swindell (PM 33)
U. S. Environmental Protection Agency
Document Processing Desk (AMEND)
Office of Pesticide Programs (7504P)
Room S4900, One Potomac Yard
2777 Crystal Drive
Arlington, Virginia 22202

RE: EPA Registration Numbers 577-569
Application for Pesticide Amendment
**Per PR Notice 2007-4: Pesticide Management and Disposal; Standards for
Pesticide Containers & Containment**

Dear Mr. Swindell,

This letter with the attached Application serves as Application for an Amendment to the label of EPA Registration Number 577-569 to come into compliance with PR Notice 2007-4 on Container Disposal Statements.


This submission includes one copy of each label showing the new Container Disposal statement plus five "clean" copies of each label.

Thank you for your prompt attention to this matter. If you have any questions regarding this submission, please do not hesitate to contact me at 216-566-2630.

Sincerely,

Madelyn K. Harding, Senior Corporate Manager
Regulatory Affairs

Attachment: Applications for Amendment of EPA reg. No. 577-569
One corrected copy and five clean copies of the proposed label

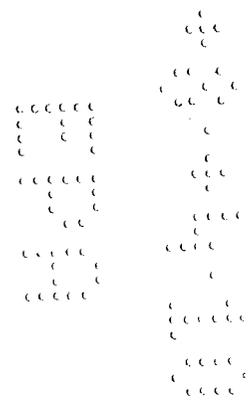

4087

Front of Label

**Sherwin-Williams Seaguard
Copper Bottom Anti-Fouling Paint #45**

Product Color

An Anti-Foulant Boat Bottom Paint

ACTIVE INGREDIENT	
Cuprous Oxide	44.7%
INERT INGREDIENTS	<u>55.3%</u>
TOTAL	100.00%
(Copper as metallic 0.45%)	

THIS PRODUCT CONTAINS PETROLEUM DISTILLATES

5 U.S. Gal
18.92 L

EPA Reg. No. 577- 569

EPA Est. No.
577-VA-01
577-NJ-02
577-CA-04
577-GA-01

KEEP OUT OF REACH OF CHILDREN.

WARNING

COMBUSTIBLE. VAPOR HARMFUL. IRRITATES EYES, SKIN AND RESIRATORY TRACT.

Before using, carefully read CAUTIONS elsewhere on label.

5087

Back or Side of Label

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

For commercial or marine use only

- Mix thoroughly prior to use. Make sure no pigment remains on the bottom or sides of the cans.
- Apply at the rate of approximately 400 square feet per gallon / 2.0-2.5 mils dry per coat.
- Apply by brush, roller or spray.
- Recoat Time: 4 hours minimum
- Dry to Service: 8 hours minimum after last coat of anti-foulant.
- Application Temperature: 50°F-110°F
- Reduction: Any reduction must be compatible with existing environmental and application conditions.

Note: First coat of SeaGuard Copper Bottom Anti-fouling paint must be applied to final coat of epoxy primer while the epoxy primer is still tacky, usually within 3-5 hours.

- Surface Preparation: All surfaces referenced below must be free of all surface contaminants and moisture prior to application of primer or anti-foulant.

Previously Painted Surface with Vinyl Anti-Foulant:

Clean surface thoroughly by hydroblasting and/or scrubbing with an abrasive pad using fresh water to remove all marine growth and surface contamination. Remove all loose, flaking paint and feather the edges by sanding. For best results, sand existing anti-fouling paint film with 100 to 120 grit abrasive and wipe clean. Apply 2 coats of SeaGuard Copper Bottom Anti-Fouling Paint.

Steel: Remove all oil and grease from surface by Solvent Cleaning per SSPC-SP1. Minimum surface preparation is Near White Metal Blast Cleaning per SSPC-SP10. Blast clean all surfaces using a sharp angular abrasive for optimum surface profile (2-3 mils). Remove all weld spatter and ground all sharp edges by grinding to a minimum 1/4" radius. Apply 1 coat of TarGuard Coal Tar Epoxy at 8-16 mils dft per coat. Apply 2 coats of SeaGuard Copper Bottom Anti-Fouling Paint.

Wood: Apply first coat of SeaGuard Copper Bottom Anti-foulant reduced 20% with Reducer R2K4 Xylene. Apply 1-2 additional coats of SeaGuard Copper Bottom Anti-Fouling Paint.

Fiberglass: Remove all dirt, oil, grease, and mold release agents. Be sure to change wiping rag frequently. Sand surface with 80 grit abrasive. Apply appropriate fiberglass primer. Apply 2 coats of SeaGuard Copper Bottom Anti-Foulant

- This product is effective in preventing marine growth such as barnacles, bugulas, etc. Can be used in fresh, brackish, or salt waters.
- Shelf Life: 24 months
- Refer to product data page for additional information on surface preparation, application, environmental conditions, product uses, and limitations.
- Non-photochemically reactive

60f7

Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL

Paint Pesticide that can not be used according to label instructions must be disposed of according to federal, state or local procedures under the Resources Conservation and Recovery Act.

CONTAINER DISPOSAL

Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

NOTICE: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

FIRST AID

IF SWALLOWED: Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IF IN EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a *poison control center or doctor*.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.

HAVE THE PRODUCT CONTAINER OR LABEL WITH YOU WHEN CALLING A POISON CONTROL CENTER OR DOCTOR, OR GOING FOR TREATMENT.

Note to Physician

Contains petroleum distillate - vomiting may cause aspiration pneumonia.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMAN AND DOMESTIC ANIMALS

WARNING

IRRITATES EYES AND RESPIRATORY TRACT. Harmful if absorbed through skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. **Do not take internally.** Do not breathe vapor or spray mist while spraying paint or sanding boat surface. Wear a mask or a respirator jointly approved by The Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

ENVIRONMENTAL HAZARDS

This Material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter waters. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame.

Optional --

VOC: 352 g/L (2.9 lbs./gal.) varies based on color (VOC WILL VARY DEPENDING ON SPECIFIC COLOR)

The Sherwin-Williams Company
Cleveland, Ohio 44115