

APPLICATION

used to control algae, bacteria and fungi commercial and industrial water. Prior to use, systems must be cleaned to remove any growth. Initial addition of 0.13 to 0.15 lbs of TOWER-CIDE per 1000 gallons of water. For continuous treatment, add 0.013 to 0.015 lbs of TOWER-CIDE per 1000 gallons of water. For initial treatment, add 0.13 to 0.15 lbs of TOWER-CIDE per 1000 gallons of water. For continuous treatment, add 0.013 to 0.015 lbs of TOWER-CIDE per 1000 gallons of water. For initial treatment, add 0.13 to 0.15 lbs of TOWER-CIDE per 1000 gallons of water. For continuous treatment, add 0.013 to 0.015 lbs of TOWER-CIDE per 1000 gallons of water.

CAUTION

KEEP OUT OF THE REACH OF CHILDREN

Avoid contact with eyes. Avoid contact of product with skin with plenty of water. If eye irritation persists, get medical attention. Avoid consumption of food. Do not discharge treated effluent into lakes, streams, or other bodies of water. Use of equipment as directed on label.

Return to drum conditioner for crushing and burying in soil.

Net Weight 50 lbs

Net Weight 100 lbs

CHEMTECH RESOURCES, INC.



**CHEMTECH
RESOURCES, INC.**


TOWER-CIDE

See Side Panels For Additional Cautions.

	<u>Percent by weight</u>
Active ingredient	10.0 percent
Poly[oxyethylene(dimethyliminio)ethylene(dimethyliminio)-ethylene dichloride]	10.0 percent
Inert ingredient	90.0 percent
Weight per gallon	8.49 pounds
Weight of active ingredient per gallon	0.85 pound

CAUTION

KEEP OUT OF THE REACH OF CHILDREN

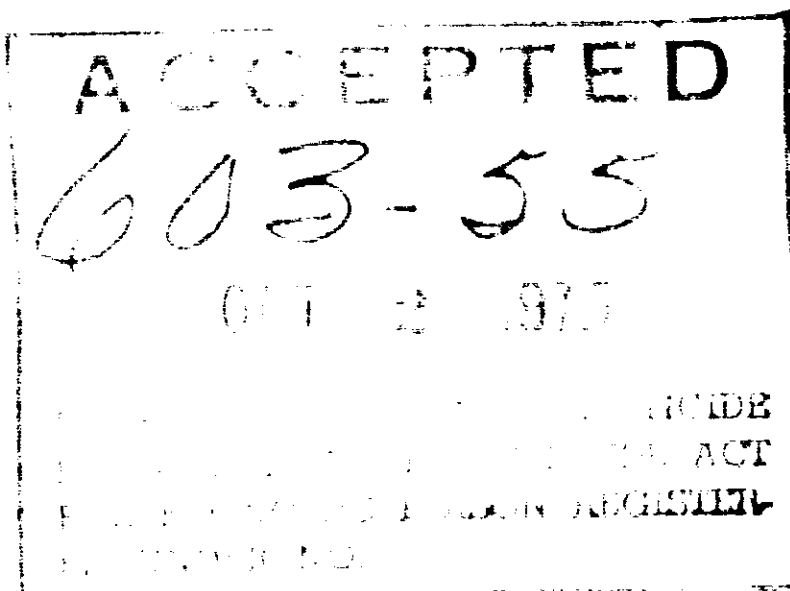

APPLICATION

TOWER-CIDE is used to control algae, bacteria and fungi commercial and industrial water. Prior to use, systems must be cleaned to remove any growth. Initial addition of 0.13 to 0.15 lbs of TOWER-CIDE per 1000 gallons of water. For continuous treatment, add 0.013 to 0.015 lbs of TOWER-CIDE per 1000 gallons of water. For initial treatment, add 0.13 to 0.15 lbs of TOWER-CIDE per 1000 gallons of water. For continuous treatment, add 0.013 to 0.015 lbs of TOWER-CIDE per 1000 gallons of water.

Avoid contact with eyes. Avoid contact of product with skin with plenty of water. If eye irritation persists, get medical attention. Avoid consumption of food. Do not discharge treated effluent into lakes, streams, or other bodies of water. Use of equipment as directed on label. Return to drum conditioner for crushing and burying in soil.

MANUFACTURED BY CHEMTECH

APPLICATION

TOWER-CIDE is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 6.13 to 15.32 fluid ounces of TOWER-CIDE per 1000 gallons of water to provide a concentration of 48 to 120 parts per million of TOWER-CIDE based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.53 to 15.32 fluid ounces of TOWER-CIDE per 1000 gallons of water (12 to 120 parts per million of TOWER-CIDE) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

CAUTION

KEEP OUT OF THE REACH OF CHILDREN

Harmful if swallowed. Do not get in eyes. Avoid contact with skin. In case of contact, flush with plenty of water for at least 15 minutes. If eye irritation persists, get medical attention. Avoid contamination of food.


This product is toxic to fish. Do not discharge treated effluent where it will drain into lakes, streams, or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Use only as directed on label.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

EPA Reg. # 603-55

EPA Est. # 603TX1

MANUFACTURED BY CHEMTECH RESOURCES, INC.

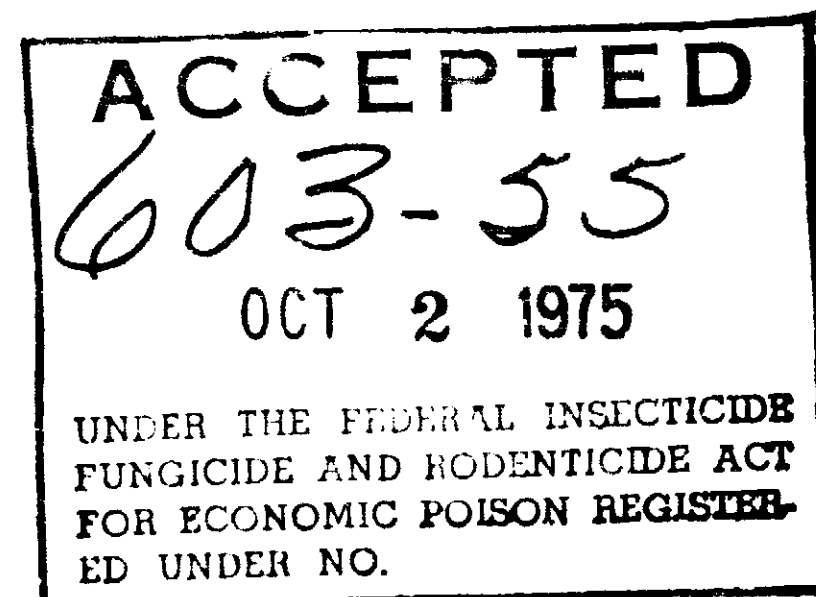

CHEMTECH RESOURCES, INC.

ENVIRONMENTAL PRODUCTS & SERVICES

P. O. BOX 24440 • DALLAS, TEXAS 75224

TOWER-CIDE

See Side Panels For Additional Cautions.

	<u>Percent by weight</u>
Active ingredient	10.0 percent
Poly[oxyethylene(dimethyliminio)ethylene(dimethyliminio)- ethylene dichloride]	10.0 percent
Inert ingredient	90.0 percent
Weight per gallon	8.49 pounds
Weight of active ingredient per gallon	0.85 pound

CAUTION

KEEP OUT OF THE REACH OF CHILDREN

CHEMTECH RESOURCES, INC.

ENVIRONMENTAL PRODUCTS & SERVICES

P. O. BOX 24440 • DALLAS, TEXAS 75224

TOWER-CIDE

Side Panels For Additional Cautions.

	<u>Percent by weight</u>
.....	10.0 percent
(dimethyliminio)-	
.....	10.0 percent
.....	90.0 percent
.....	8.49 pounds
n	0.85 pound

ON
ACH OF CHILDREN

APPLICATION

TOWER-CIDE is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 6.13 to 15.32 fluid ounces of TOWER-CIDE per 1000 gallons of water to provide a concentration of 48 to 120 parts per million of TOWER-CIDE based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.53 to 15.32 fluid ounces of TOWER-CIDE per 1000 gallons of water (12 to 120 parts per million of TOWER-CIDE) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

Harmful if swallowed. Do not get in eyes. Avoid contact with skin. In case of contact, flush with plenty of water for at least 15 minutes. If eye irritation persists, get medical attention. Avoid contamination of food. This product is toxic to fish. Do not discharge treated effluent where it will drain into lakes, streams, or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Use only as directed on label.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

Net Content, _____ U. S. Gallons

MANUFACTURED BY CHEMTECH RESOURCES, INC.