


E-Z FLO GRAIN KEAP



DANGER:
KEEP OUT OF THE REACH OF CHILDREN

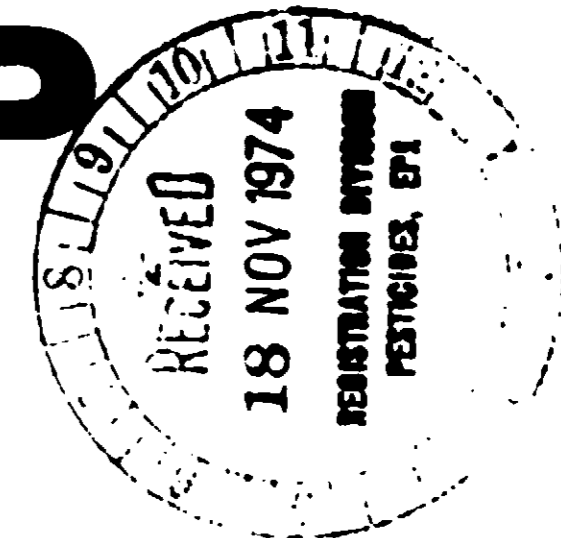

POISON



SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONS AND ANTIDOTE STATEMENTS.

NET CONTENTS ON CONTAINER

AN INHIBITOR FOR CONTROL OF MOLDS AND FUNGI IN HIGH-MOISTURE STORED CORN, OATS (stored), BARLEY, WHEAT OR SORGHUM TO BE USED AS LIVESTOCK FEED. stored wheat, stored sorghum

ACTIVE INGREDIENT:

Propionic Acid 100%

DIRECTIONS FOR USE

1. Determine moisture content of corn, oats, barley, wheat or sorghum.
2. Apply E-Z FLOW GRAIN KEAP to freshly harvested grain based on moisture content according to the following table:

The manufacturer makes no warranties, express or implied, concerning this product or its use, which extend beyond the description on the label. All statements made concerning this product apply only when used as directed.

Moisture Content of Grain % by Weight	U.S. Gallons of E-Z Flo Grain Keap Per Ton of Moist Grain	Pounds of E-Z Flo Grain Keap Per Ton of Moist Grain
16	1.33	11
18	1.57	13
20	1.81	15
22	2.05	17
24	2.29	19
26	2.54	21
28	2.78	23
30	3.02	25
32	3.26	27
34	3.50	29
36	3.74	31

SOLD BY
E-Z FLO CHEMICAL COMPANY
 Division of Kirsto Company
 COLUMBUS, OHIO LANSING, MICHIGAN

ACCEPTED
 DEC. 16, 1974
 UNDER THE FEDERAL INSECTICIDE, FUNGICIDE AND MOLLUSCICIDE ACT FOR ECONOMIC POISON REGISTERED UNDER NO. 635-669

410-23

EPA Est. 635-MI-; OH-1

EPA Reg. No. 635-669


DANGER: Corrosive. Liquid causes eye and skin damage. Wear goggles or face shield and rubber gloves when handling. Do not get on skin, in eyes, or on clothing. Breathing of vapors may be harmful. Avoid breathing vapors or mist. Harmful if swallowed. In case of contact with eyes or skin, immediately flush with plenty of water for at least 15 minutes. For eyes, get medical attention. Remove contaminated clothing and shoes at once. Wash thoroughly before reuse.

COMBUSTIBLE Keep away from heat, sparks and open flame. Do not leave container open.

RINSE EMPTY CONTAINER THOROUGHLY WITH WATER. DO NOT REUSE. RETURN TO DRUM CONDITIONER OR DESTROY.

3. Apply in manner to achieve thorough mixing and coverage of grain. Use of auger is recommended to convey grain to storage.
4. Protect treated feed grain from precipitation. Weather-proof storage is recommended. Waterproof floor of storage area. Follow normal aeration procedures to prevent moisture migration.
5. Propionic acid is corrosive to metal. Clean application equipment thoroughly after each use. Paint all metal surfaces with suitable anticorrosive paint. Alternatively, line all metal surfaces in storage area with polyethylene or polyvinyl chloride sheeting.

E-Z FLO GRAIN KEAP

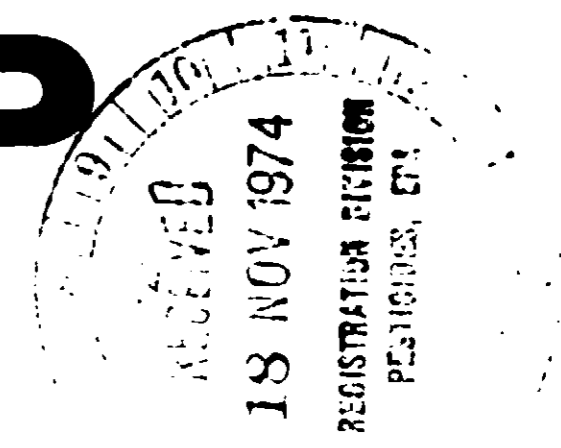

NET WEIGHT CONTAINER

DANGER:
KEEP OUT OF THE REACH OF CHILDREN



POISON



SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONS AND ANTIDOTE STATEMENTS

AN INHIBITOR FOR CONTROL OF MOLDS AND FUNGI IN HIGH-MOISTURE STORED CORN, OATS, BARLEY, WHEAT OR SORGHUM TO BE USED AS LIVESTOCK FEED.

ACTIVE INGREDIENT:

Propionic Acid ----- 100%

The manufacturer makes no warranties, express or implied, concerning this product or its use, which extend beyond the description on the label. All statements made concerning this product apply only when used as directed.

DIRECTIONS FOR USE

1. Determine moisture content of corn, oats, barley, wheat or sorghum.
2. Apply **E-Z FLOW GRAIN KEAP** to freshly harvested grain based on moisture content according to the following table:

Moisture Content of Grain % by Weight	U.S. Gallons of E-Z Flo Grain Keap Per Ton of Moist Grain	Pounds of E-Z Flo Grain Keap Per Ton of Moist Grain
16	1.33	11
18	1.57	13
20	1.81	15
22	2.05	17
24	2.29	19
26	2.54	21
28	2.78	23
30	3.02	25
32	3.26	27
34	3.50	29
36	3.74	31

SOLD BY
E-Z FLO CHEMICAL COMPANY
Division of Kirsto Company
COLUMBUS, OHIO LANSING, MICHIGAN

ACCEPTED
DEC 16 1974
UNDER FEDERAL INSPECTION
635-669

410-23

EPA Est. 635-MI-; OH-1

EPA Reg. No. 635-669

3. Apply in manner to achieve thorough mixing and coverage of grain. Use of auger is recommended to convey grain to storage.
4. Protect treated feed grain from precipitation. Weather-proof storage area is recommended. Waterproof floor of storage area. Follow normal aeration procedures to prevent moisture migration.
5. Propionic acid is corrosive to metal. Clean application equipment thoroughly after each use. Paint all metal surfaces with suitable anticorrosive paint. Alternatively, line all metal surfaces in storage area with polyethylene or polyvinyl chloride sheeting.