

# A PRENTISS PEST-TESTED PRODUCT

## ANTIDOTE

**EXTERNAL** -- in case of spillage on skin, wash promptly with soap and water.

**INTERNAL** — Emetic of 1 tablespoonful mustard in tumbler of water. Call a physician.

## CONTAINER DISPOSAL

Rinse Equipment and containers and dispose of wastes by burying in noncroplands away from water supplies. Containers should be disposed of by punching holes in them and burying with wastes or by burning. Keep out of smoke.

## SUBTERRANEAN TERMITES— Direction for Professional Use

Use 1 gal. Prentox 8 lb. Concentrate in a 95 gal. water emulsion as follows:

### CONTROL IN EXISTING BUILDINGS

#### Building Having Crawl Spaces

(1) Dig a trench adjacent to and around all piers and pipes and along both sides of the foundation walls. Dig the trench to, but not below the footing. Then as the trench is refilled, treat the soil at the rate of 4 gallons per linear foot for each foot of depth. A trench 3 feet deep would require 12 gallons per 10 linear feet.

(2) Treat voids in hollow-block masonry foundations at the rate of 1 gallon per linear foot of wall. Apply so that the emulsion will reach the footing. If this is done by drilling or rod holes avoid going into plumbing or electrical conduits.

#### Buildings Having Basements

(1) Dig a trench along the outside of the foundation walls in brick or hollow block or concrete foundations, dig a trench to, but not below the footing. Then as the trench is refilled, treat the soil at the rate of 4 gallons per 10 linear feet for each foot of depth. A trench 3 feet deep would require 12 gallons per 10 linear feet.

(2) It may also be necessary to treat critical areas only under the basement flooring such as around sewer pipes, conduits and piers and along the inside of the foundation walls and interior walls.



## PRENCHLOR 8-LB. EMULSIFIABLE CONCENTRATE INSECTICIDE FOR USE ONLY BY PROFESSIONAL APPLICATORS

### ACTIVE INGREDIENTS:

Technical Chlordane*	.....72.0%
Petroleum Distillate	.....21.0%
INERT INGREDIENTS	.....7.0%
TOTAL	100.00%

\*Equivalent to 43.2% Octachloro-4, 7-methanotetra — hydroindane and 28.8% related compounds.  
Contains 8.0 lbs. actual chlordane per gallon.

### NET CONTENTS

## WARNING KEEP OUT OF REACH OF CHILDREN

### ENVIRONMENTAL CAUTIONS

This product is toxic to fish, birds and other wildlife. Birds and other wildlife in treated areas may be killed. Keep out of lakes, streams or ponds. Do not apply where runoff is likely to occur. Do not apply when weather conditions favor drift from areas treated. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product only as specified on this label.

EPA EST. NO. 655-NJ-1  
EPA REG. NO. 655-506

One method consists of drilling holes about a foot apart through the concrete floor adjacent to the areas requiring treatment. The chemical emulsion then should be injected into the soil beneath the floor. Avoid drilling into plumbing or electrical conduits. The emulsion should be applied at the rate of at least 4 gallons per 10 linear feet of wall.

(3) Treat voids in hollow-block foundations at the rate of 1 gallon per 5 linear feet of wall so that the emulsion will reach the footing. Do this by drilling or probing. Take care to avoid drilling into plumbing or electrical conduits.

### Slab-on-ground Construction

(1) Infestations of this type of construction are difficult to control. One method consists of drilling holes about a foot apart through the concrete slab, adjacent to all cracks and expansion joints, and injecting the chemical into the soil beneath the slab. Avoid drilling into plumbing and electrical conduits. Another method is to drill through the foundation walls from the outside and force the chemical just beneath the slab along the inside of the foundation and along the cracks and expansion joints. The emulsion should be applied at the rate of at least 4 gallons per 10 linear feet of foundation or expansion joint.


(2) Dig a trench 1 foot in depth, but not below the top of the footing, along the outside of the foundation walls. Apply the emulsion at the rate of 4 gallons per 10 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.

(3) Treat voids in hollow-block foundations at the rate of one gallon of emulsion per 5 linear feet of wall so that the emulsion will reach the footing. Avoid drilling into plumbing or electrical conduits.

### WARNING

May be fatal if swallowed. Contact with skin can cause toxic symptoms. Do not breathe vapors or spray mist. In case of contact with skin, wash with soap and water. Avoid contamination of feed and foodstuffs. Keep out of reach of children.

DO NOT ALLOW CHILDREN IN TREATED AREAS

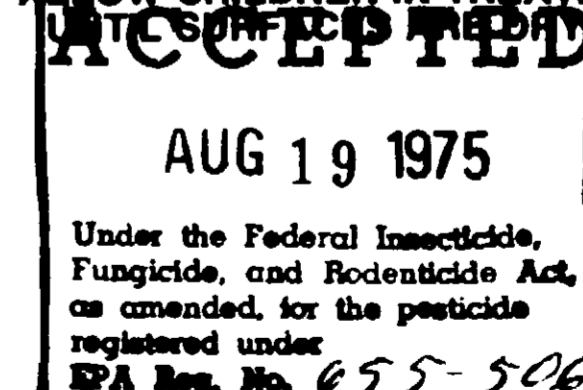

# Prentiss Drug & Chemical Co., Inc.

PLANT 135 WILSON AVENUE NEWARK, N. J. 07105

# A PRENTISS PEST-TESTED PRODUCT

**CAUTION**

Harmful if swallowed. Contact with skin can cause toxic symptoms. Avoid breathing vapors or spray mist. In case of contact with skin, wash with soap and water. Avoid contamination of feed and foodstuffs. Keep out of reach of children.

**DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.**

**ANTIDOTE**

**EXTERNAL** — In case of spillage on skin, wash promptly with soap and water.

**INTERNAL** — Emetic of 1 tablespoonful mustard in tumbler of water. Call a physician.

**TERMITE CONTROL**

Add 4 gallons of Prechlor 20% OSC to 86 gallons of deodorized kerosene for 1.0% solution. Apply the 1.0% solution as follows:

**PRECONSTRUCTION TREATMENT**

**Slab-on-Ground Construction**

1. Apply an over-all treatment under entire surface of floor slab. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material, apply at the rate of 1½ gallons per 10 square feet.
2. Under slab-on-ground porch floors and entrance platforms, apply an over-all treatment at the rate of 1 gallon per 10 square feet.
3. Along both sides of foundation wall, along interior foundation walls, and around plumbing dig a narrow trench to a depth of 1 foot, but not below the top of the footing. Apply at the rate of 2 gallons per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.
4. Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the solution so as to reach the footing.

**CONTAINER DISPOSAL**

Rinse equipment and containers and dispose of wastes by burying in non-crop lands, away from water supplies. Containers should be disposed of by punching holes in them and burying with wastes, or by burning. Keep out of smoke.




**PRENCHLOR  
20% OIL SOLUBLE  
CONCENTRATE  
INSECTICIDE FOR USE ONLY BY  
PROFESSIONAL APPLICATORS**

**ACTIVE INGREDIENTS:**

Technical Chlordane*	.....	20.0%
Petroleum Distillate	.....	80.0%
<b>Total</b>		<b>100.0%</b>

\*Equivalent to 12% Octachloro-4, 7-methanotetrahydroindane and 8.0% related compounds.

Contains approximately 1.5 lbs. actual Chlordane per gallon.

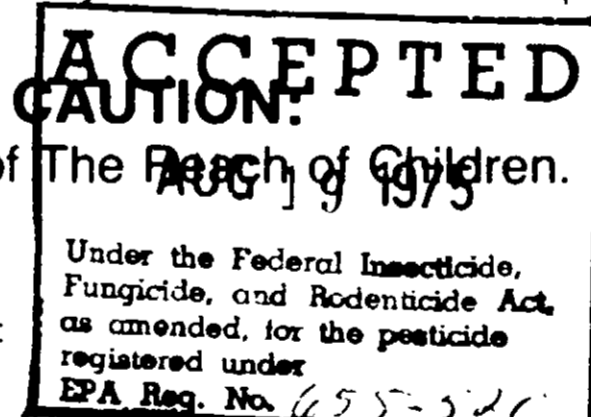

**NET CONTENTS:**

**CAUTION: COMBUSTIBLE MIXTURE**

This product is toxic to fish, birds and other wildlife. Keep out of lakes, streams or ponds. Do not apply where runoff is likely to occur. Do not apply when weather conditions favor drift from areas treated. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

E.P.A. Reg. No. 655-520  
E.P.A. Est. No. 655-NJ-1

**Buildings with Crawl Spaces**

1. Dig a narrow trench to the top of the footing along the inside of foundation walls, around piers, sewer pipes and conduits. Apply 2 gallons of solution per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.
2. Dig a narrow trench to the top of the footing along the outside of the foundation wall. Apply 2 gallons of solution per 5 linear feet of trench per each foot of depth. A trench 3 feet deep would require 6 gallons per 5 linear feet. The chemical should be mixed with the soil as it is being replaced in the trench.
3. Under attached porches, entrance platforms, utility entrances, and similar situations where slab or fill is at the same grade level apply 1 gallon per 10 square feet of soil surface.
4. Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the solution so as to reach the footing.

**Buildings with Basements**

1. Apply an over-all treatment under the basement floorings, as well as under attached porches, entrance platforms, utility entrances, and similar situations where slab fill is at the grade level. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is of washed gravel, cinders, or similar coarse material, increase the dosage by at least one-half. Where crawl spaces exist, treat as described in part 2 below.
2. Dig a narrow trench to the top of the footing along the inside of foundation walls, around piers, sewer pipes and conduits. Apply 2 gallons of solution per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.
3. Along the outside of foundation walls, dig a narrow trench, such trench to be dug no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a maximum depth required alongside foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to a 30" depth, make the trench 12 to 15" deep and rod to footing, spacing the holes about 1 foot apart.
4. Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. Apply the solution so as to reach the footing. Premises treated with Prechlor 20% OSC will give residual control for a minimum of five years.

## Prentiss Drug & Chemical Co., Inc.

PLANT, 338 WILSON AVENUE, NEWARK, N. J. 07105

OFFICE, 365 FIFTH AVENUE, NEW YORK, N. Y. 10018