

NOV 27 1974
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED
UNDER NO. 662-53



POISON

DANGER — Keep out of reach of children.

Nonflammable liquid and gas under pressure.

Do not breathe air containing this gas. Have available gas mask approved for chlorine service by the U.S. Bureau of Mines or NIOSH.

Handle and use only in accordance with practice recommended in the CHLORINE MANUAL published by the Chlorine Institute, New York, N.Y.

NET CONTENTS _____ TONS

Manufactured by BASF Wyandotte Corporation

EPA Reg. No. 662-53

PORT EDWARDS, WISCONSIN 54469

EPA Est. 662-WI-1

CHLORINE ACTIVE INGREDIENT


Chlorine 100.0%

FIRST AID

In case of exposure, move patient to fresh air, keep warm and quiet.

Call a physician.

If breathing has apparently ceased, artificial respiration should be started immediately. If breathing is difficult, administer oxygen.

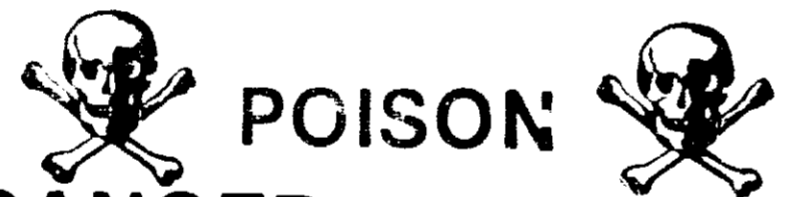

POISON

DANGER — Keep out of reach of children.

Nonflammable liquid and gas under pressure.

Do not breathe air containing this gas. Have available gas mask approved for chlorine service by the U.S. Bureau of Mines or NIOSH.

Handle and use only in accordance with practice recommended in the CHLORINE MANUAL published by the Chlorine Institute, New York, N.Y.

NET CONTENTS _____ TONS

Manufactured by BASF Wyandotte Corporation

EPA Reg. No. 662-53

GEISMAR, LOUISIANA 70734

EPA Est. 662-LA-1

CHLORINE ACTIVE INGREDIENT

Chlorine 100.0%

FIRST AID

In case of exposure, move patient to fresh air, keep warm and quiet.

Call a physician.

If breathing has apparently ceased, artificial respiration should be started immediately. If breathing is difficult, administer oxygen.

NOV 21 1974
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED

RECEIVED
8 NOV 1974
REGISTRATION DIVISION
PESTICIDES, EPA

PESTICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED
NO UNDER NO. 662-53



POISON

DANGER — Keep out of reach of children.

Nonflammable liquid and gas under pressure.

Do not breathe air containing this gas. Have available gas mask approved for chlorine service by the U.S. Bureau of Mines or NIOSH.

Handle and use only in accordance with practice recommended in the CHLORINE MANUAL published by the Chlorine Institute, New York, N.Y.

NET CONTENTS _____ TONS

Manufactured by BASF Wyandotte Corporation

EPA Reg. No. 662-53

PORT EDWARDS, WISCONSIN 54469

EPA Est. 662-WI-1

CHLORINE

ACTIVE INGREDIENT


Chlorine 100.0%

FIRST AID

In case of exposure, move patient to fresh air, keep warm and quiet.

Call a physician.

If breathing has apparently ceased, artificial respiration should be started immediately. If breathing is difficult, administer oxygen.

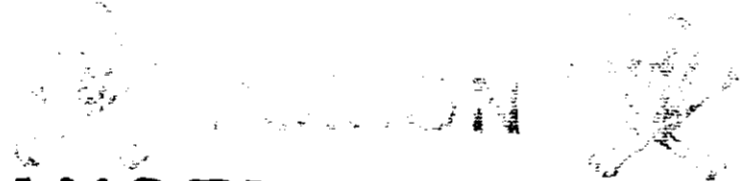

POISON

DANGER — Keep out of reach of children.

Nonflammable liquid and gas under pressure.

Do not breathe air containing this gas. Have available gas mask approved for chlorine service by the U.S. Bureau of Mines or NIOSH.

Handle and use only in accordance with practice recommended in the CHLORINE MANUAL published by the Chlorine Institute, New York, N.Y.

NET CONTENTS _____ TONS

Manufactured by BASF Wyandotte Corporation

EPA Reg. No. 662-53

GHISMAR, LOUISIANA 7034

EPA Est. 662-WI-1

CHLORINE

ACTIVE INGREDIENT

Chlorine 100.0%

FIRST AID


In case of exposure, move patient to fresh air, keep warm and quiet.

Call a physician.

If breathing has apparently ceased, artificial respiration should be started immediately. If breathing is difficult, administer oxygen.



NOV 10 1974
REGISTRATION DIVISION
PESTICIDES, EPA

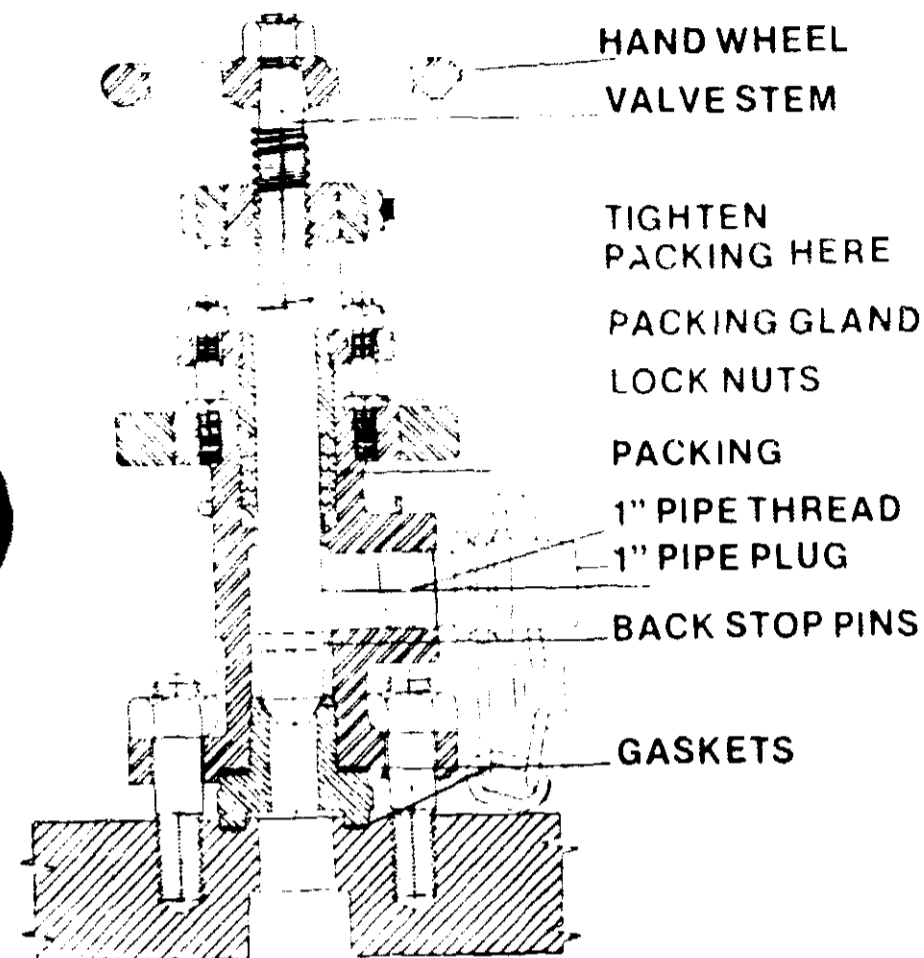

CHLORINE GAS OUTLET VALVE


THIS VALVE USED ONLY WHEN AIR PADDING OR FOR ATTACHING PRESSURE GAUGE. USE ONLY DRY, OIL-FREE COMPRESSED AIR.

WHEN EMPTY, CLOSE ALL VALVES AND REPLACE ALL PLUGS BEFORE RETURNING CAR.

This car shipped at _____ lbs./sq. in.

pressure. Date _____


F 822-La

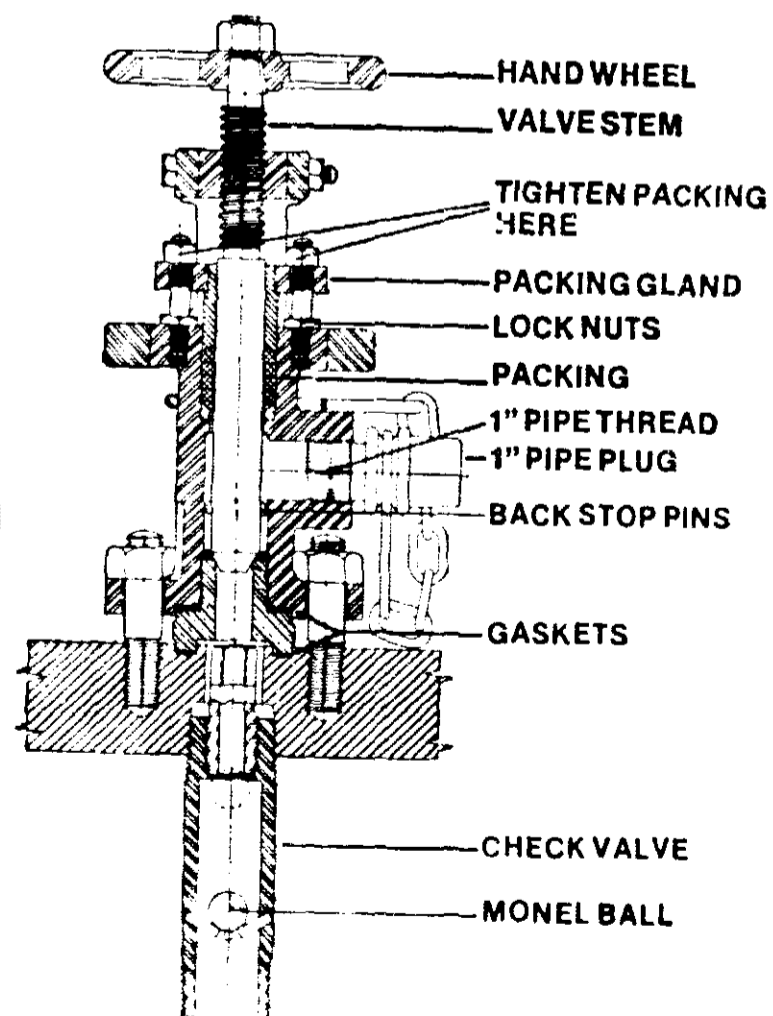

LIQUID CHLORINE OUTLET VALVE

1. Before opening valve, be sure packing gland nuts are snug. Check during use, tightening if necessary to prevent leakage.
2. Check all connections for leaks, using ammonia.
3. Be sure valve is closed before removing outlet plugs.
4. Use an expansion loop between valve and unloading line.
5. Reduce pressure to under 100 lbs. before disconnecting.
6. When empty, close all valves and replace all plugs before releasing car.
7. The ball check valve, installed below the liquid valve, closes when there is a sudden surge of liquid in the line as might occur in case of a break, or if the liquid valve is opened too quickly. To release the ball to its open position, close the liquid valve and tap the manway plate gently.

F 823 WI

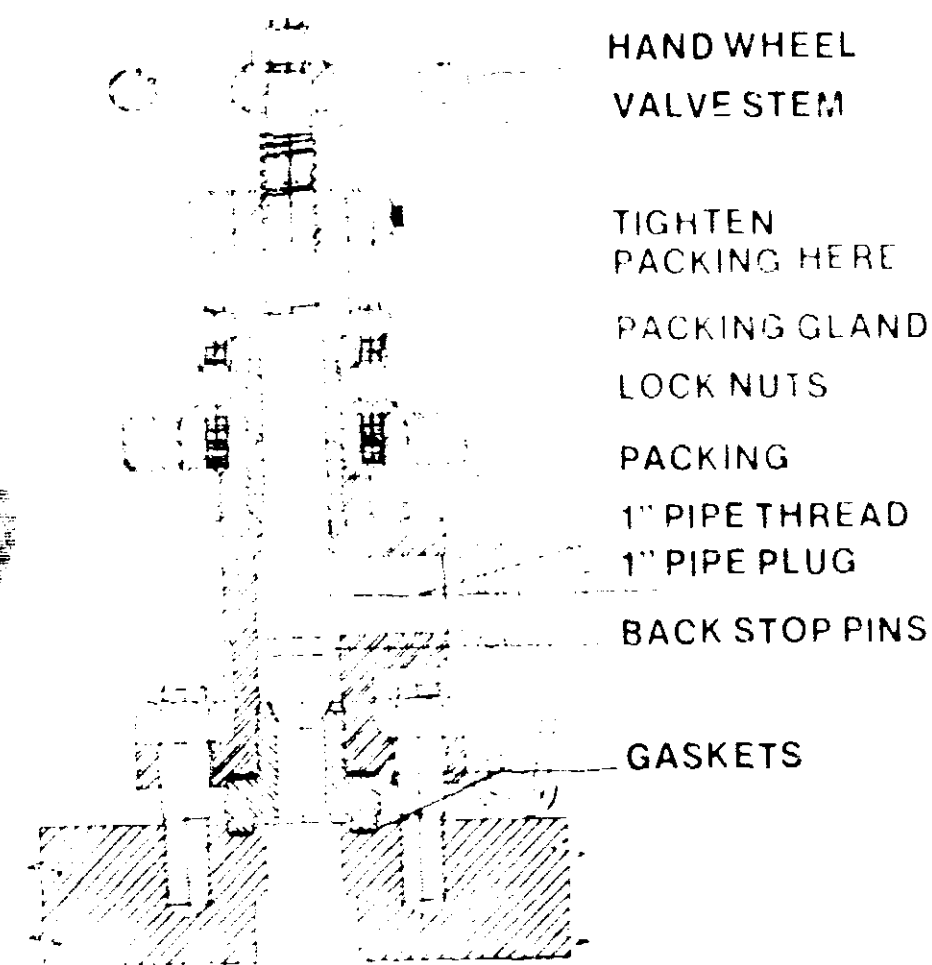

CHLORINE GAS OUTLET VALVE


THIS VALVE USED ONLY WHEN AIR PADDLING OR FOR ATTACHING PRESSURE GAUGE AND ONLY DRY, OIL FREE COMPRESSED AIR.

WHEN EMPTY, CLOSE ALL VALVES AND REPLACE ALL PLUGS BEFORE RETURNING CAR.

This car shipped at _____ lbs./sq. in.

pressure. Date _____

F 42 L 9

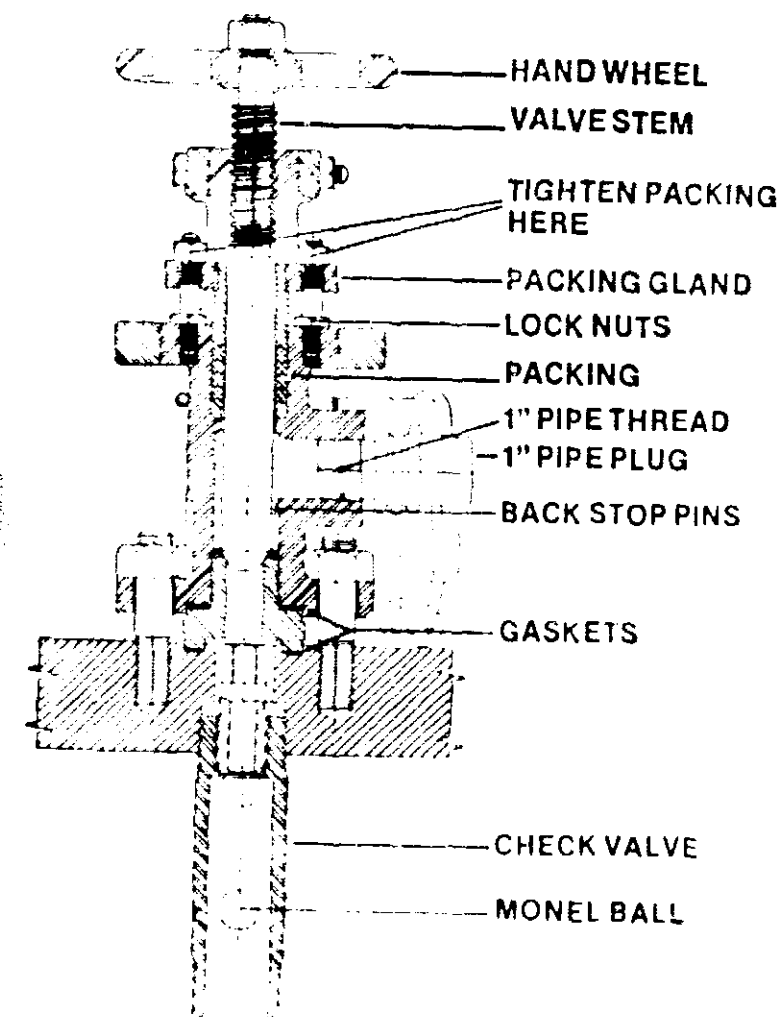

LIQUID CHLORINE OUTLET VALVE

1. Before opening valve, be sure packing gland nuts are snug. Check during use, tightening if necessary to prevent leakage.
2. Check all connections for leaks, using ammonia.
3. Be sure valve is closed before removing outlet plugs.
4. Use an expansion loop between valve and unloading line.
5. Reduce pressure to under 100 lbs. before disconnecting.
6. When empty, close all valves and replace all plugs before releasing car.
7. The ball check valve, installed below the liquid valve, closes when there is a sudden surge of liquid in the line as might occur in case of a break, or if the liquid valve is opened too quickly. To release the ball to its open position, close the liquid valve and tap the manway plate gently.

F 823 W 6