

Reduced copy (approximately 60%)

to fit on 8 1/2" x 14" paper

ATHON WT

**TRIAL MICROBICIDE FOR USE IN
ATING WATER COOLING TOWERS,
MOLD AND MILDEW CONTROL,
FIELD INJECTION WATERS
O AIR WASHER SYSTEMS**

MENTS

NET CONTENTS

MENTS

OF REACH OF CHILDREN

RACTICAL TREATMENT

ATHON WT is a powerful biocide that kills algae, bacteria, fungi, and molds. It is used in water cooling towers, air washers, and injection wells to control microbial growth and prevent scale formation.

IAN

ATHON WT is a powerful biocide that kills algae, bacteria, fungi, and molds. It is used in water cooling towers, air washers, and injection wells to control microbial growth and prevent scale formation.

PART

PA 128

NET CONTENTS

GALLONS

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

Apply 100 ppm of Athon WT to the circulating water. Maintain this concentration continuously to prevent microbial growth.

OIL FIELD INJECTION WATERS

Apply 100 ppm of Athon WT to the injection water. Maintain this concentration continuously to prevent microbial growth.

AIR WASHER SYSTEMS

INTERMITTENT DRUG METHOD

Apply 100 ppm of Athon WT to the water in the air washer system. Maintain this concentration continuously to prevent microbial growth.

CONTINUOUS FEED METHOD

Apply 100 ppm of Athon WT to the water in the air washer system. Maintain this concentration continuously to prevent microbial growth.

SUBJECT DISEASE - This is a powerful biocide that kills algae, bacteria, fungi, and molds. It is used in water cooling towers, air washers, and injection wells to control microbial growth and prevent scale formation.

WOOD AND WOOD PRODUCTS

Apply 100 ppm of Athon WT to the wood and wood products. Maintain this concentration continuously to prevent microbial growth.

STORAGE

Store in a cool, dry place. Do not store in direct sunlight. Do not store in contact with other chemicals.

PESTICIDE DISPOSAL

Do not dispose of Athon WT in the environment. Dispose of in accordance with local regulations.


CONTAINER DISPOSAL

Do not reuse containers. Dispose of in accordance with local regulations.

PLASTIC CONTAINERS - Do not use plastic containers for Athon WT. Use only metal containers.

GENERAL

For more information, contact Chemtrec at 800-424-9300.

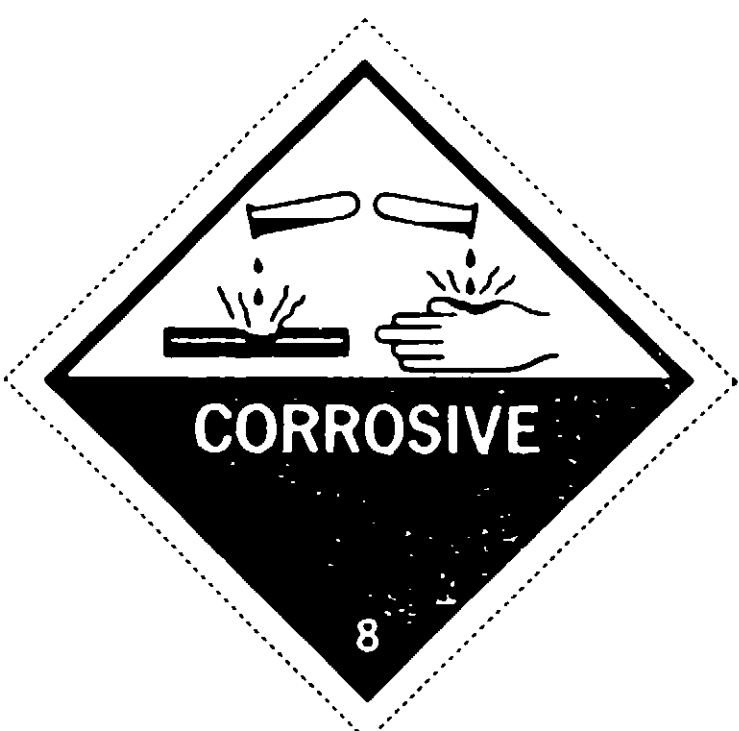

DOT Proper Shipping Name
CORROSIVE LIQUID, N.O.S.

5-Chloro-2-methyl-4-isothiazolin-3-one

UN 1760

In event of emergency,

CALL TOLL FREE: 800-424-9300 (CHEMTREC)

MADE IN U.S.A.

ACCEPTED

OCT 18 1984

In accordance with the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under PA Reg. No. 707-128

Reduced copy (approximately 60%)

to fit on 8 1/2" x 14" paper

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC
ANIMALS**

DANGER

CORROSIVE

- CAUSES EYE DAMAGE AND SKIN BURNS
- MAY CAUSE ALLERGIC SKIN REACTION
- MAY BE HARMFUL IF SWALLOWED
- MAY BE FATAL IF SWALLOWED OR ABSORBED THROUGH THE SKIN

Do not get it in eyes or on skin. If getting into eyes, flush with water for 15 minutes. If getting on skin, wash with soap and water. If swallowed, do not induce vomiting. Call your doctor immediately.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and other aquatic life. Do not use in or near water bodies. Do not use in or near areas where birds, bees, or other animals feed. Do not use in or near areas where crops are raised. Do not use in or near areas where children play. Do not use in or near areas where livestock graze.

CONDITIONS OF SALE AND WARRANTY

This product is sold as is. The manufacturer makes no warranty, expressed or implied, for the product. The user assumes all responsibility for the proper use of this product. The manufacturer is not liable for any damage or injury resulting from the use of this product. The user should read the label and follow the directions carefully. The manufacturer is not responsible for any damage or injury resulting from the use of this product.



**ROHM
HAAS**
PHILADELPHIA, PA. 19103
TEL: 215-592-3000

KATHON WT

**INDUSTRIAL MICROBICIDE FOR USE IN
RECIRCULATING WATER COOLING TOWERS,
WOOD MOLD AND MILDEW CONTROL,
OIL FIELD INJECTION WATERS
AND AIR WASHER SYSTEMS**

ACTIVE INGREDIENTS

1,3,5-Trichloro-2,4,6-triazine-2,4,6-triazine	100%
---	------

INERT INGREDIENTS

Water	0%
-------	----

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

- IF SWALLOWED:** Do not induce vomiting. Drink plenty of water. If you are pregnant, call your doctor immediately.
- IF SWALLOWED:** Rinse immediately with water. Do not breathe vapors. If you are pregnant, call your doctor immediately.
- IF ON SKIN:** Wash thoroughly with soap and water. Rinse and wash immediately. Calling for help if in eyes. Wash with plenty of water for at least 15 minutes. Call a physician.

NOTE TO PHYSICIAN

Product should be kept away from children. Do not use in areas where children play. Do not use in areas where livestock graze.

SEE THE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

MANUFACTURED BY
ROHM AND HAAS COMPANY
PHILADELPHIA, PA.
EPA Est No 707 PA-1
EPA Reg No 707 120

NET CONTENTS _____
GALLONS

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

This product is a general use disinfectant. It is used to control microorganisms in water.

**INDUSTRIAL RECIRCULATING
WATER COOLING TOWERS**

For the control of bacteria, algae and fungi in recirculating water cooling towers. Add 100 ppm of Kathon WT to the water.

INITIAL DOSE: When the system is first installed, add 100 ppm of Kathon WT to the water. Maintain this level.

SUBSEQUENT DOSE: When the system is in operation, add 100 ppm of Kathon WT to the water. Maintain this level.

OIL FIELD INJECTION WATERS

For the control of bacteria and fungi in oil field injection waters. Add 100 ppm of Kathon WT to the water.

INITIAL DOSE: Add 100 ppm of Kathon WT to the water. Maintain this level.

SUBSEQUENT DOSE: Add 100 ppm of Kathon WT to the water. Maintain this level.

AIR WASHER SYSTEMS

Add to the recirculating water of the air washer. Add 100 ppm of Kathon WT to the water.

INTERMITTENT OR SLUG METHOD

INITIAL DOSE: Add 100 ppm of Kathon WT to the water. Maintain this level.

SUBSEQUENT DOSE: Add 100 ppm of Kathon WT to the water. Maintain this level.

CONTINUOUS FEED METHOD

INITIAL DOSE: Add 100 ppm of Kathon WT to the water. Maintain this level.

SUBSEQUENT DOSE: Add 100 ppm of Kathon WT to the water. Maintain this level.

WOOD AND WOOD PRODUCTS

For the control of mold and mildew on wood and wood products. Add 100 ppm of Kathon WT to the water.

STORAGE AND DISPOSAL

PROHIBITIONS
Do not use in areas where children play. Do not use in areas where livestock graze.

PESTICIDE DISPOSAL
Do not use in areas where children play. Do not use in areas where livestock graze.

CONTAINER DISPOSAL
Do not use in areas where children play. Do not use in areas where livestock graze.

GENERAL
Do not use in areas where children play. Do not use in areas where livestock graze.

ACCEPTED
OCT 18 1984
Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 707-128