

Reg # 707-128

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC
ANIMALS**

DANGER

CORROSIVE

CAUSES EYE DAMAGE AND SKIN BURNS

MAY CAUSE ALLERGIC SKIN REACTION

MAY BE HARMFUL IF INHALED

**MAY BE FATAL IF SWALLOWED OR ABSORBED
THROUGH THE SKIN**


Do not get in eyes, on skin, on clothing. Wear goggles or face shield and rubber gloves when handling. Avoid breathing vapor or mist. Avoid contamination of food. Do not take internally. Wash thoroughly after handling.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this pesticide only as specified on this label.

CONDITIONS OF SALE AND WARRANTY

Rohm and Haas warrants that the product conforms to its chemical description and is reasonably fit for the purpose stated on the label only when used in accordance with label directions under normal conditions of use. **ROHM AND HAAS MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES EITHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE.** Handling, storage and use of the product by Buyer or User are beyond the control of Rohm and Haas and Seller. Risks, such as ineffective, or other unintended consequences resulting from, but not limited to, failure to follow label directions will be assumed by the Buyer or User. **IN NO CASE WILL ROHM AND HAAS OR SELLER BE HELD LIABLE FOR CONSEQUENTIAL, SPECIAL OR INDIRECT DAMAGES RESULTING FROM THE HANDLING, STORAGE OR USE OF THIS PRODUCT.**



**ROHM
AND
HAAS**

PHILADELPHIA, PA 19105
(TEL 1-215-592-3000)

KATHON[®] WT

**INDUSTRIAL MICROBICIDE FOR USE IN
RECIRCULATING WATER COOLING TOWERS,
WOOD MOLD AND MILDEW CONTROL,
OIL FIELD INJECTION WATERS
AND AIR WASHER SYSTEMS**

ACTIVE INGREDIENTS:

5-Chloro-2-methyl-4-isothiazolin-3-one 86

2-Methyl-4-isothiazolin-3-one 26

INERT INGREDIENTS: 888

TOTAL 1000

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Do not induce vomiting. Drink promptly a large quantity of egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately. Never give anything by mouth to an unconscious person.

IF INHALED: Remove immediately to fresh air. If not breathing, apply artificial respiration. If breathing is difficult, give oxygen. Call a physician.

IF ON SKIN: Wash thoroughly with soap and water. Remove and wash contaminated clothing before reuse.

IF IN EYES: Flush with plenty of water for at least 15 minutes. Call a physician.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

MANUFACTURED BY
ROHM AND HAAS COMPANY
PHILADELPHIA, PA 19105
EPA Est No 707 EN 1
EPA Reg No 707-128



NET CONTENTS _____

GALLONS

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

It is a violation of Federal law to use this product inconsistent with its labeling.

**INDUSTRIAL RECIRCULATING
WATER COOLING TOWERS**

For the control of bacteria, algae and fungi add microbicide to the tower basin, distribution box or point to insure uniform mixing.

INITIAL DOSE: When the system is noticeably fouled apply 31.3 to 86 ppm Kathon WT (0.33 to 1.0 pound 11 fluid ounces of Kathon WT per 1000 gallons in the system). Repeat until control is achieved.

SUBSEQUENT DOSE: When microbial control is achieved apply 15.6 to 23.4 ppm Kathon WT (0.17 to 0.25 pound to 3 fluid ounces of Kathon WT per 1000 gallons in the system) weekly or as needed to maintain control. Fouled systems must be cleaned before treatment.

OIL FIELD INJECTION WATERS

For the control of slime-forming and sulfate-reducing bacteria in oil and gas field water systems, including enhanced oil recovery, drilling, fracturing and completion fluids, treat with 7 to 36 ppm Kathon WT microbicide on the severity of contamination.

INITIAL DOSE: Add 18 to 36 ppm Kathon WT (0.17 to 0.36 pounds Kathon WT per 1000 gallons of water) at a point in the system where it will be mixed. Repeat treatment after three days or as needed until control is achieved.

SUBSEQUENT DOSE: Add 7 to 18 ppm Kathon WT (0.075 gallons or 3.1 to 7.9 pounds Kathon WT per 1000 gallons of water) every seven days or as needed to maintain control.

AIR WASHER SYSTEMS

Add to the air washer sump or chill water sump to insure uniform mixing, 15.6 to 86 ppm Kathon WT (0.17 to 1.0 pound or 2 to 11 fluid ounces of Kathon WT per 1000 gallons of water in the system) depending on the severity of contamination to control bacteria and algae which cause fouling in industrial air washers.

INTERMITTENT OR SLUG METHOD

INITIAL DOSE: When the system is noticeably fouled apply 31.3 to 86 ppm Kathon WT (0.33 to 1.0 pound 11 fluid ounces of Kathon WT per 1000 gallons in the system). Repeat until control is achieved.

SUBSEQUENT DOSE: When microbial control is achieved apply 15.6 to 23.4 ppm Kathon WT (0.17 to 0.25 pound to 3 fluid ounces of Kathon WT per 1000 gallons weekly or as needed to maintain control.


CONTINUOUS FEED METHOD

INITIAL DOSE: When the system is first noticed apply 31.3 to 86 ppm Kathon WT (0.33 to 1.0 pound 11 fluid ounces of Kathon WT per 1000 gallons of water in the system).

SUBSEQUENT DOSE: Maintain the treatment level with a continuous feed of 15.6 to 23.4 ppm Kathon WT (0.17 to 0.25 pounds or 2 to 3 fluid ounces of Kathon WT per 1000 gallons of makeup water).

Badly fouled systems must be cleaned before initial treatment.

Note: For use only in industrial air washing systems. Maintain effective mist eliminating components.



(1 inch)


54Y-1630A Rev. 4 — Rohm and Haas — OC — 1/23/99



NOT RECALIBRATED
LINE NOT VISIBLE
DATE JUN 10 1999

171

8584-R11a

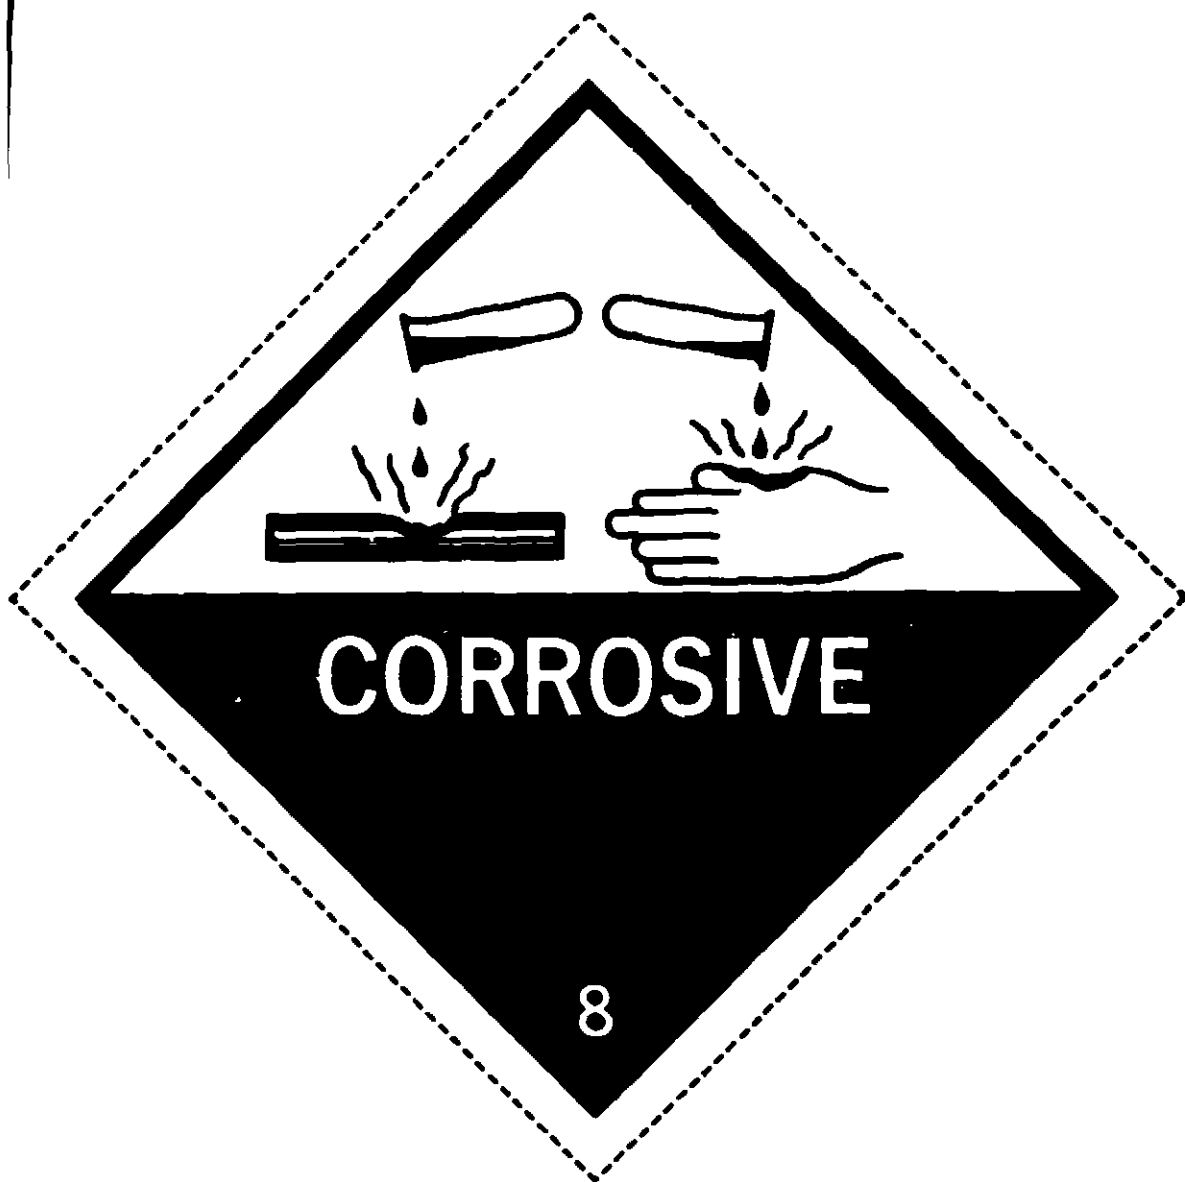

Proper Shipping Name:
CORROSIVE LIQUID, N.O.S.
(5-Chloro-2-methyl-4-isothiazolin-3-one)
UN 1760

In event of emergency CALL TOLL FREE: 800-424-9300 (CHEMTREC)
FOR EMERGENCY IN U.K. TEL: 091-489-8181