

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER

CORROSIVE
CAUSES EYE DAMAGE AND SKIN BURNS
MAY CAUSE ALLERGIC SKIN REACTION
MAY BE HARMFUL IF INHALED
MAY BE FATAL IF SWALLOWED OR ABSORBED
THROUGH THE SKIN

Do not get these chemicals on your skin. Wear goggles, gloves, apron, and rubber gloves when handling. Avoid breathing vapors. Do not ingest. Avoid contamination of food. Do not take internally. Wash thoroughly after handling.

ENVIRONMENTAL HAZARDS

This product is highly toxic to aquatic life. Do not discharge into water bodies. Do not use in areas where it may come in contact with water. Do not use in areas where it may come in contact with soil. Do not use in areas where it may come in contact with plants. Do not use in areas where it may come in contact with animals.

NOTICE - This product is highly toxic to aquatic life. Do not discharge into water bodies. Do not use in areas where it may come in contact with water. Do not use in areas where it may come in contact with soil. Do not use in areas where it may come in contact with plants. Do not use in areas where it may come in contact with animals.



PHILADELPHIA, PA 19105

KATHON® WT 1.5%

**INDUSTRIAL MICROBICIDE FOR USE IN
RECIRCULATING WATER COOLING TOWERS
AND AIR WASHER SYSTEMS**

ACTIVE INGREDIENTS:

INERT INGREDIENTS:

TOTAL

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Do not induce vomiting. Give water to drink. If unconscious, give water by mouth. If conscious, give water by mouth. If unconscious, give water by mouth. If conscious, give water by mouth.

IF INHALED: Remove immediately from exposure. If unconscious, give water by mouth. If conscious, give water by mouth. If unconscious, give water by mouth. If conscious, give water by mouth.

IF ON SKIN: Wash thoroughly with soap and water. Remove and wash contaminated clothing before reuse.

IF IN EYES: Flush with plenty of water. Get medical attention as soon as possible.

NOTE TO PHYSICIAN:

Probable mucous membrane irritation. Treat with water. If unconscious, give water by mouth. If conscious, give water by mouth. If unconscious, give water by mouth. If conscious, give water by mouth.

For more information, contact the manufacturer.

MANUFACTURED BY
ROHM AND HAAS COMPANY
PHILADELPHIA, PA

EPA Est No 707-PA-1
EPA Reg No 707-133

NET CONTENTS

GALLONS

**DIRECTIONS
GENERAL CLASS**

**INDUSTRIAL RECIRCULATING
WATER COOLING**

INITIAL DOSE: When the water is first put into the system, add 1.5% of KATHON WT 1.5% to the water.

SUBSEQUENT DOSE: When the water is recirculated, add 1.5% of KATHON WT 1.5% to the water.

AIR WASHER SYSTEMS

INITIAL DOSE: When the water is first put into the system, add 1.5% of KATHON WT 1.5% to the water.

SUBSEQUENT DOSE: When the water is recirculated, add 1.5% of KATHON WT 1.5% to the water.

CONTINUOUS FEED METHOD
INITIAL DOSE: When the water is first put into the system, add 1.5% of KATHON WT 1.5% to the water.

SUBSEQUENT DOSE: When the water is recirculated, add 1.5% of KATHON WT 1.5% to the water.

NOTE: This product is highly toxic to aquatic life. Do not discharge into water bodies. Do not use in areas where it may come in contact with water. Do not use in areas where it may come in contact with soil. Do not use in areas where it may come in contact with plants. Do not use in areas where it may come in contact with animals.

STORAGE AND

DISPOSAL: This product is highly toxic to aquatic life. Do not discharge into water bodies. Do not use in areas where it may come in contact with water. Do not use in areas where it may come in contact with soil. Do not use in areas where it may come in contact with plants. Do not use in areas where it may come in contact with animals.

Size 1 to 45 actual size

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

Corrosive to metals and organic materials. See MSDS for details.

INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

For the addition of this chemical to a recirculating water cooling tower, follow the following instructions:

INITIAL DOSE: Add the chemical to the water in the tower at a rate of 1 lb. per 100,000 gal. of water. This will provide a concentration of 10 ppm.

SUBSEQUENT DOSE: Add the chemical to the water in the tower at a rate of 1 lb. per 100,000 gal. of water. This will provide a concentration of 10 ppm.

AIR WASHER SYSTEMS

For the addition of this chemical to an air washer system, follow the following instructions:

INTERMITTENT OR SLUG METHOD

INITIAL DOSE: Add the chemical to the water in the system at a rate of 1 lb. per 100,000 gal. of water. This will provide a concentration of 10 ppm.

SUBSEQUENT DOSE: Add the chemical to the water in the system at a rate of 1 lb. per 100,000 gal. of water. This will provide a concentration of 10 ppm.

CONTINUOUS FEED METHOD

INITIAL DOSE: Add the chemical to the water in the system at a rate of 1 lb. per 100,000 gal. of water. This will provide a concentration of 10 ppm.

SUBSEQUENT DOSE: Add the chemical to the water in the system at a rate of 1 lb. per 100,000 gal. of water. This will provide a concentration of 10 ppm.


NOTE: The chemical is not to be used in a system that has a pH of 10 or higher.

For more information, see MSDS.

STORAGE AND DISPOSAL

STORAGE: Store in a cool, dry place. Do not store in a metal container.

DISPOSAL: Do not pour down the drain. Contact your local health department for disposal instructions. Do not mix with other chemicals.

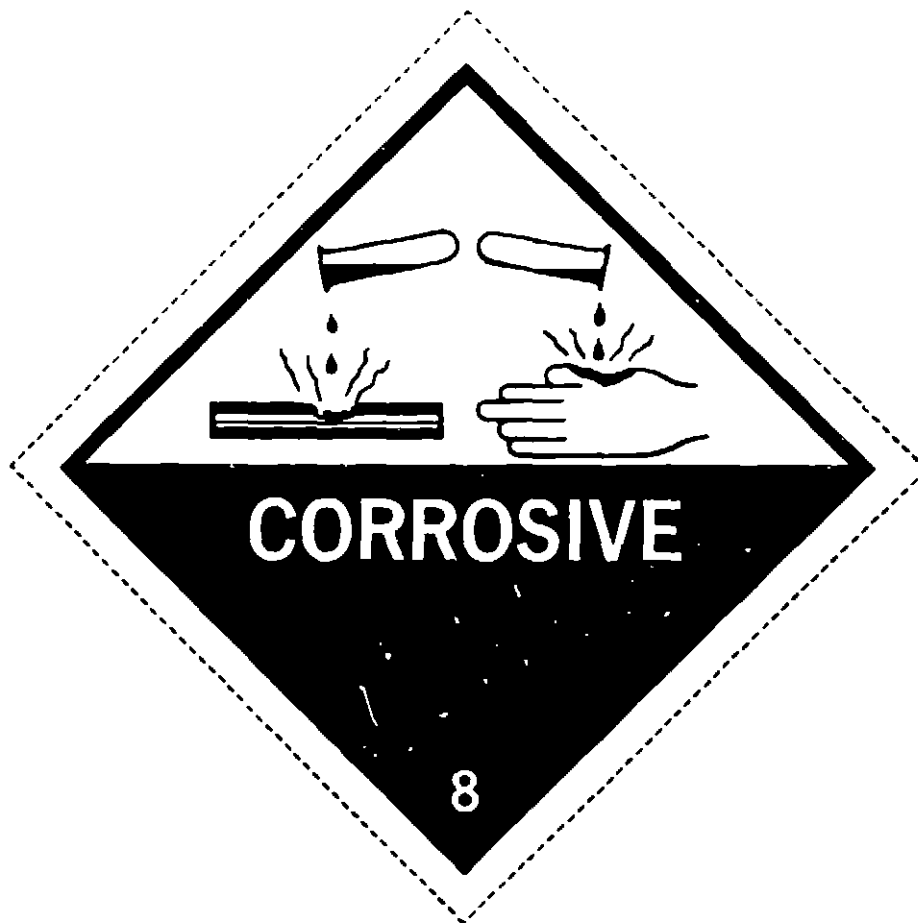

DOT Proper Shipping Name:

CORROSIVE LIQUID, N.O.S.

• Chloro 2-methyl-4-isothiazolin-3-one

UN 1760

In event of emergency,

CALL TOLL FREE: 800-424-9300 (CHEMTREC)