

Reduced copy (approximately 60%)
to fit on 8½" x 14" paper

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER

CORROSIVE

CAUSES EYE DAMAGE AND SKIN BURNS

MAY CAUSE ALLERGIC SKIN REACTION

MAY BE HARMFUL IF INHALED

MAY BE FATAL IF SWALLOWED OR ABSORBED
THROUGH THE SKIN

Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Avoid breathing vapor or dust. Avoid contamination of food. Do not use immediately after handling.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not discharge into streams, ponds, or other water bodies. Do not discharge into the ground. For guidance, contact your Regional Office of the EPA. Do not contaminate water by cleaning of equipment or disposal of waste. Keep this product out of the reach of children.

KATHON WT 1.5%

INDUSTRIAL MICROBICIDE FOR USE IN
RECIRCULATING WATER COOLING TOWERS,
AIR WASHER SYSTEMS, OIL FIELD
INJECTION WATERS, PAPERMILL SLIME
CONTROL AND WOOD MILDEW CONTROL

ACTIVE INGREDIENTS.

5-Chloro-2-methyl-4-isothiazole-3-one
2-Methyl-4-isothiazole-3-one

INERT INGREDIENTS.

Total 100.00%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Do not induce vomiting. Drink plenty of water. If you are pregnant, drink large quantities of water. Avoid alcohol. Call a physician immediately.

IF IRRITATED: Remove contaminated clothing and wash thoroughly with soap and water. If irritation persists, call a physician.

IF ON SKIN: Wash thoroughly with soap and water. Remove and wash contaminated clothing before reuse.

IF IN EYES: Flush with plenty of water for at least 15 minutes. Call a physician.

NOTE TO PHYSICIAN.

Preclude further damage that could result from the use of gastric lavage. Monitor for signs of respiratory distress. Refer to a hospital if necessary.

SEE USE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

Ready to Use
EPA Reg. No. 101-133
EPA Reg. No. 101-133

NET CONTENTS

GALLONS

DIRECTIONS FOR USE GENERAL CLASSIFICATION

1.5% solution of Kathon WT 1.5% is used for the control of bacteria in recirculating water cooling towers.

INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

AIR WASHER SYSTEMS

Add to the air washer tank or the water supply to the air washer tank. For the control of bacteria in air washer systems, apply 1.5% solution of Kathon WT 1.5% to the water in the air washer tank. Add Kathon WT 1.5% to the water in the air washer tank to maintain a concentration of 1.5%.

INTERMITTENT OR SLUG METHOD

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

For the control of bacteria in recirculating water cooling towers, apply 1.5% solution of Kathon WT 1.5% to the water in the tower basin. Add Kathon WT 1.5% to the water in the tower basin to maintain a concentration of 1.5%.

WOOD AND WOOD PRODUCTS

Kathon WT 1.5% is recommended for the protection of wood and wood products from decay, rot, and insect damage. Apply 1.5% solution of Kathon WT 1.5% to the wood and wood products. Add Kathon WT 1.5% to the wood and wood products to maintain a concentration of 1.5%.

PAPERMILLS

Kathon WT 1.5% is recommended for the control of bacteria in paper mills. Apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.


For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.

For the control of bacteria in paper mills, apply 1.5% solution of Kathon WT 1.5% to the water in the paper mill. Add Kathon WT 1.5% to the water in the paper mill to maintain a concentration of 1.5%.



**ROHM
AND
HAAS**

PHILADELPHIA, PA 19105
TEL 1-215 592 3000

Reduced copy (approximately 60%)

to fit on 8½" x 14" paper

ION WT 1.5%

**AL MICROBICIDE FOR USE IN
ING WATER COOLING TOWERS,
HER SYSTEMS, OIL FIELD
WATERS, PAPERMILL SLIME
AND WOOD MILDEW CONTROL**

Total

ACH OF CHILDREN

ACTICAL TREATMENT

Many of the organisms that cause the diseases listed above are also the cause of the diseases listed below. Therefore, the use of this product may also be beneficial in the treatment of these diseases.

Use only the amount of product recommended on the label. Do not use more than the recommended amount.

Do not use this product on food crops or on animals. Do not use this product in or near water.

Do not use this product in or near water.

NET CONTENTS

GALLONS

DIRECTIONS FOR USE GENERAL CLASSIFICATION

INDUSTRIAL RECIRCULATING WATER COOLING TOWERS

1. Add 1.5% of the product to the circulating water in the cooling tower. The amount of product to be added will depend on the volume of water in the tower. The amount of product to be added will be 1.5% of the total volume of water in the tower.

AIR WASHER SYSTEMS

1. Add 1.5% of the product to the circulating water in the air washer system. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

INTERMITTENT OR SLOO METHOD

1. Add 1.5% of the product to the circulating water in the intermittent or sloo method. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

CONTINUOUS FEED METHOD

1. Add 1.5% of the product to the circulating water in the continuous feed method. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

OIL FIELD INJECTION WATERS

1. Add 1.5% of the product to the circulating water in the oil field injection waters. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

WOOD AND WOOD PRODUCTS

1. Add 1.5% of the product to the circulating water in the wood and wood products. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

PAPERMILLS

1. Add 1.5% of the product to the circulating water in the papermills. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

STORAGE AND DISPOSAL

1. Add 1.5% of the product to the circulating water in the storage and disposal. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

PLASTIC DISPOSAL

1. Add 1.5% of the product to the circulating water in the plastic disposal. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

CONTAINER DISPOSAL


1. Add 1.5% of the product to the circulating water in the container disposal. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

GENERAL

1. Add 1.5% of the product to the circulating water in the general. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

CONDITIONS OF SALE AND WARRANTY

1. Add 1.5% of the product to the circulating water in the conditions of sale and warranty. The amount of product to be added will depend on the volume of water in the system. The amount of product to be added will be 1.5% of the total volume of water in the system.

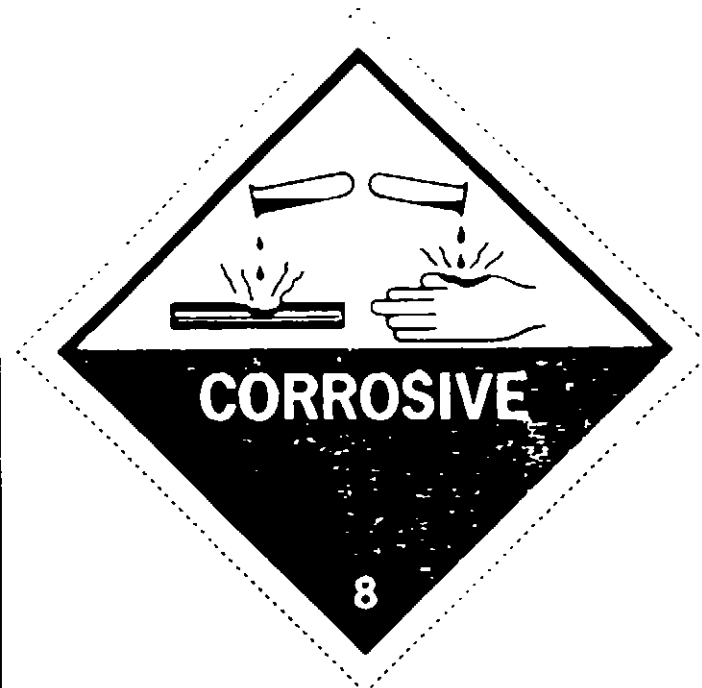

DOT Proper Shipping Name

CORROSIVE LIQUID, N.O.S.

(5 Chloro 2-methyl-4-isothiazolin-3-one)

UN 1760

In event of emergency

CALL TOLL FREE 800-424-9300 (CHEMTREC)

ACCEPTED

SEP 27 1984

Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the pesticide registered under EPA Reg. No. 727135