16 os ans

Mix CTC with water in accordance with the table:

Volume of Water Amount of CTC

5 gallons ________6 ounces

50 gallons _______1/2 gallon

100 gallons _______1 gallon

Apove dilution makes a 1% chlordane. ______

PRE-CONSTRUCTION TREATMENT

Apply an over-all treatment under entire surface of floor slab porch floors, and entrance platforms. Spray mixture at a rate of 1 gallon per 10 square feet, except if fill under slab is gravel, apply at rate of 1 gallon per 7 square feet. After foundation walls are laid and before backfill is pushed in, spray with mixture to point of run-off.

AFTER CONSTRUCTION TREATMENT

A. BUILDINGS WITH CRAWL SPACES.

1. Dig a trench 1 to 2 feet deep along the inside and outside of the building foundation and apply 2 gallons mixture per 5 linear feet. Do not dig below the footing. Apply two gallons mixture per 5 linear feet to critical areas under the house such as around piers, sewer pipes, con-

ducts, and service entrances. Do not make an over-all treatment in the area.

- 2. Along the outside of foundation walls, (including the part opposite entrance platforms, porches, etc.) apply 2 gallons mixture per 5 linear feet where the foundation is shallow. Apply 4 gallons mixture per 5 linear feet where the foundation is deep.
- 3. Apply 1 gallon mixture per 10 square feet of soil surface as an over-all treatment only when the attached porches, entrance platforms, utility entrances, and similar constructions are slabs on fill or ground.

WARRANTY: M.F.A. Oil Company warrants that this product conforms to its chemical description and is reasonably fit for the purpose stated on the label when used in accordance with directions under normal conditions of use. Neither this warranty nor any other warranty of merchantability or fitness for a particular purpose, express or implied, extends to the use of this product contrary to label instructions, or under abnormal conditions, or under conditions not reasonably foreseeable to M.F.A. Oil Company, and buyer assumes the risk of any such use.

NET CONTENTS ONE GALLON





CORRECT USE SHOULD PREVENT TERMITES AT LEAST FIVE YEARS PER APPLICATION

ACTIVE INGREDIENTS *Technical Chlordane	74.35%
Petroleum Hydrocarbons	
*Equivalent to 44.61% Octachbro - 4, 7 - Methanotetrahydroindane and	100.00%

WARNING: KEEP OUT OF REACH OF CHILDREN SEE OTHER WARNINGS ON BACK PANEL

29.74% Related Compounds.



ducts, and service entrances. Do not make an over-all treatment in the area.

- 2. Along the outside of foundation walls, (including the part opposite entrance platforms, porches, etc.) apply 2 gallons mixture per 5 linear feet where the foundation is shallow. Apply 4 gallons mixture per 5 linear feet where the foundation is deep.
- 3. Apply 1 gallon mixture per 10 square feet of soil surface as an over-all treatment only when the attached porches, entrance platforms, utility entrances, and similar constructions are slabs on fill or ground.

WARRANTY: M.F.A. Oil Company warrants that this product conforms to its chemical description and is reasonably fit for the purpose stated on the label when used in accordance with directions under normal conditions of use. Neither this warranty nor any other warranty of merchantability or fitness for a particular purpose, express or implied, extends to the use of this product contrary to label instructions, or under abnormal conditions, or under conditions not reasonably foreseeable to M.F.A. Oil Company, and buyer assumes the risk of any such use.

NET CONTENTS ONE GALLON





CORRECT USE SHOULD PREVENT TERMITES AT LEAST FIVE YEARS PER APPLICATION

*Technical Chlordane	74.35%
Petroleum Hydrocarbons INERT INGREDIENTS	
*Equivalent to 44.61% Octachloro 4, 7 - Methanotetrahydroindane and 29.74% Related Compounds.	100.00%

WARNING: KEEP OUT OF REACH OF CHILDREN SEE OTHER WARNINGS ON BACK PANEL


- B. BUILDINGS WITH CONCRETE SLAB ON GROUND.
 - 1. Along the outside of foundation walls, dig a narrow trench no deeper than the top of the footings, but no deeper than 15 inches. Apply 2 gallons mixture per 5 linear feet. Replace the soil and apply another 1 gallon mixture per 5 linear feet to the back fill. Cover the back fill with a layer of soil.
 - 2. Apply 1 gallon mixture per 10 square feet as an over-all treatment under the slab, and under attached porches.
 - a. Over-all treatments applied to washed and ungraded fills or fills of an absorbent material; i.e., cinders should be increased by ½ gallon mixture per 10 square feet over that specified above.
 - 3. Apply 2 gallons mixture per 5 linear feet to critical areas under the slab, such as along the inside of foundation walls and around service entrances.

C. BUILDINGS WITH BASEMENTS.

1. Dig a trench 30 inches deep, and apply four gallons mixture per 5 linear feet along the out-

USDA Reg. No. 746-76

in a safe place
ANTIDOTE: If chlordane is swallowed—



side of

der of d

crawl sp

D. VOIDS in

footing.

WARNING: Mi

vapor, or spra

all voids r

of concrete

5 linear f

with soil.
This product contaminate v posal of waste DO NOT USE OR OPEN FL Destroy it by in a safe placis swallowed—



NET CONTENTS ONE GALLON

74.35%

17.65%

8.00%





CORRECT USE SHOULD PREVENT TERMITES AT LEAST FIVE YEARS PER APPLICATION

ACTIVE INGREDIENTS *Techn cal Chlordane Petroleum Hydrocarbons INERT INGREDIENTS

*Equivalent to 44.61% Octachloro -4, 7 - Methanotetrahydroindane and 29.74% Related Compounds.

100.00%

WARNING: KEEP OUT OF REACH OF CHILDREN SEE OTHER WARNINGS ON BACK PANEL

B. BUILDINGS WITH CONCRETE SLAB ON GROUND.

- 1. Along the outside of foundation walls, dig a narrow trench no deeper than the top of the footings, but no deeper than 15 inches. Apply 2 gallons mixture per 5 linear feet. Replace the soil and apply another 1 gallon mixture per 5 linear feet to the back fill. Cover the back fill with a layer of soil.
- 2. Apply 1 gallon mixture per 10 square feet as an over-all treatment under the slab, and under attached porches.
 - a. Over-all treatments applied to washed and ungraded fills or fills of an absorbent material; i.e., cinders should be increased by \frac{1}{2} gallon mixture per 10 square feet over that specified above.
- 3. Apply 2 gallons mixture per 5 linear feet to critical areas under the slab, such as along the inside of foundation walls and around service entrances.

C. BUILDINGS WITH BASEMENTS.

USDA Reg. No. 746-76

1. Dig a trench 30 inches deep, and apply four gallons mixture per 5 linear feet along the outside of the building foundation. Follow remainder of direction under section for buildings with crawl spaces.

D. VOIDS in masonry walls: In all above treatments, all voids must be treated. Drill between courses of concrete blocks and apply 1 gallon mixture per 5 linear feet. Make application from grade to footing.


WARNING: May be fatal if swallowed. Do not breathe vapor, or spray mist. Do not get on skin. In case of contact wash immediately with soap and water. Do not get in eyes. Do not contaminate feed and foodstuffs. Keep out of the reach of children. Do not apply this material where it will contaminate water containing fish or domestic water supplies. Do not allow children or pets on treated area until covered with soil.

This product is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME: Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

ANTIDOTE: If chlordane is swallowed— INDUCE VOMITING AND CALL A PHYSICIAN.



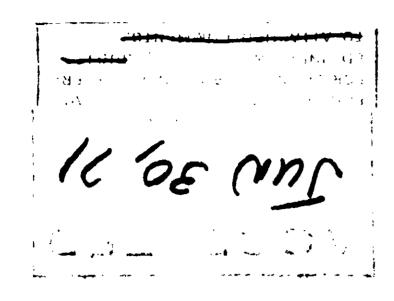

PRE-CONSTRUCTION TREATMENT

Apply an over-all treatment under entire surface of floor slab porch floors, and entrance platforms. Spray mixture at a rate of 1 gallon per 10 square feet, except if fill under slab is gravel, apply at rate of 1 gallon per 7 square feet. After foundation walls are laid and before backfill is pushed in, spray with mixture to point of run-off.

AFTER CONSTRUCTION TREATMENT

- A. BUILDINGS WITH CRAWL SPACES.
 - 1. Dig a trench 1 to 2 feet deep along the inside and outside of the building foundation and apply 2 gallons mixture per 5 linear feet. Do not dig below the footing. Apply two gallons mixture per 5 linear feet to critical areas under the house such as around piers, sewer pipes, con-

- ducts, and service entrances. Do not make an over-all treatment in the area.
- 2. Along the outside of foundation walls, (including the part opposite entrance platforms, porches, etc.) apply 2 gallons mixture per 5 linear feet where the foundation is shallow. Apply 4 gallons mixture per 5 linear feet where the foundation is deep.
- 3. Apply 1 gallon mixture per 10 square feet of soil surface as an over-all treatment only when the attached porches, entrance platforms, utility entrances, and similar constructions are slabs on fill or ground.

WARRANTY: M.F.A. Oil Company warrants that this product conforms to its chemical description and is reasonably fit for the purpose stated on the label when used in accordance with directions under normal conditions of use. Neither this warranty nor any other warranty of merchantability or fitness for a particular purpose, express or implied, extends to the use of this product contrary to label instructions, or under abnormal conditions, or under conditions not reasonably foreseeable to M.F.A. Oil Company, and buyer assumes the risk of any such use.

NET CONTENT



CORRECT USE SHOULD PIEVENT TERM AT LEAST FIVE YEARS FER APPLICAT

*Technical Chlordane	74.
Petroleum Hydrocarbons INERT INGREDIENTS	17. 8.
Equivalent to 44.61% Octachiro - 4, 7 - Methanotetrahydroindan@nd 29.74% Related Compounds.	100.

WARNING: KEEP OUT OFREACH OF CHI SEE OTHER WARNINGS O BACK PANEL



NET CONTENTS ONE GALLON





USE SHOULD PREVENT TERMITES FIVE YEARS FER APPLICATION

EDIENTS Chlordane	74.35%
n Hydrocarbons EDIENTS	17.65% 8.00%
to 44.61% Octachiro -	100.00%

lated Compounds.

G: KEEP OUT OF CHILDREN THER WARNINGS OF BACK PANEL

B BUILDINGS WITH CONCRETE SLAB ON GROUND.

- 1. Along the outside of foundation walls, dig a narrow trench no deeper than the top of the footings, but no deeper than 15 inches. Apply 2 gallons mixture per 5 linear feet. Replace the soil and apply another 1 gallon mixture per 5 linear feet to the back fill. Cover the back fill with a layer of soil.
- 2. Apply 1 gallon mixture per 10 square feet as an over-all treatment under the slab, and under attached porches.
 - a. Over-all treatments applied to washed and ungraded fills or fills of an absorbent material; i.e., cinders should be increased by $\frac{1}{2}$ gallon mixture per 10 square feet over that specified above.
- 3. Apply 2 gallons mixture per 5 linear feet to critical areas under the slab, such as along the inside of foundation walls and around service entrances.

C. BUILDINGS WITH BASEMENTS.

1. Dig a trench 30 inches deep, and apply four gallons mixture per 5 linear feet along the out

USDA Reg No 746 76

- side of the building foundation. Follow remainder of direction under section for buildings with crawl spaces.
- D. VOIDS in masonry walls: In all above treatments, all voids must be treated. Drill between courses of concrete blocks and apply 1 gallon mixture per 5 linear feet. Make application from grade to footing.

WARNING: May be fatal if swallowed. Do not breathe vapor, or spray mist. Do not get on skin. In case of contact wash immediately with soap and water. Do not get in eyes. Do not contaminate feed and food-stuffs. Kcap out of the reach of children. Do not apply this material where it will contaminate water containing fish or domestic water supplies. Do not allow children or pets on treated area until covered with soil.

This product is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME: Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

ANTIDOTE: If chlordane is swallowed——INDUCE VOMITING AND CALL A PHYSICIAN.

