

DIRECTIONS FOR USE: W53682 PILT SOLUTION-CONCENTRATE WOOD PRESERVATIVE - IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING. FOR INDUSTRIAL USE ONLY. SHOULD BE USED FOR CONTROLLING THE CONCENTRATION OF THE ACTIVE INGREDIENT OF W53641 DURING ITS FLOWCOATING OR DIPPING APPLICATION PROCESS ACCORDING TO TEST PROCEDURES FURNISHED TO THE INDUSTRIAL USER.

NOTE TO USER: TO EQUAL THE COMPOSITION OF W53641 PILT SOLUTION BLEND ONE PART BY VOLUME OF W53682 PILT SOLUTION-CONCENTRATE WITH TWO PARTS BY VOLUME OF TOLUOL. TO APPLY AS W53641 PILT-SOLUTION IMMERSE THE WOODEN PARTS BY EITHER FLOWCOATING OR DIPPING. ALLOW THE WOODEN PARTS TO DWELL IN THE FLOWCOATER OR DIP TANK IN CONTACT WITH THE PILT SOLUTION A MINIMUM OF 15 SECONDS. REMOVE FROM SOLUTION AND ALLOW THE WOOD TO DRY @ 65-75°F IN AN AREA WITH ENGINEERED VENTILATION FOR 90 SECONDS PRIOR TO PAINTING. USE TOLUOL FOR CLEAN-UP SOLVENT.

NOTE TO USER: WEAR PROTECTIVE CLOTHING AND RUBBER GLOVES WHEN HANDLING FRESHLY TREATED WOODEN PARTS OR STRUCTURES. PROTECTIVE CLOTHING SHOULD BE WASHED BEFORE REUSE.

STORAGE AND DISPOSAL



PROHIBITIONS: DO NOT CONTAMINATE WATER, FOOD, OR FEED BY STORAGE OR DISPOSAL. OPEN DUMPING IS PROHIBITED.

WOOD PRESERVATIVE DISPOSAL: WOOD PRESERVATIVE FLOWCOAT OR DIPPING MATERIAL THAT CANNOT BE USED OR CHEMICALLY REPROCESSED SHOULD BE DISPOSED OF ACCORDING TO PROCEDURES APPROVED BY FEDERAL, STATE, OR LOCAL DISPOSAL AUTHORITIES.

CONTAINER DISPOSAL: 55-GALLON DRUMS SHOULD BE EITHER:

- A) RESEALED AND OFFERED FOR RECONDITIONING OR,
- B) TRIPLE RINSED AND OFFERED FOR RECYCLING, RECONDITIONING, OR DISPOSAL IN APPROVED LANDFILL.

GENERAL DISPOSAL: CONSULT FEDERAL, STATE, OR LOCAL DISPOSAL AUTHORITIES FOR APPROVED ALTERNATE PROCEDURES.

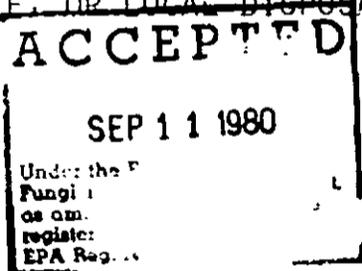

EPA REG. No. 748-226
EPA EST. No. 748-WI-1
OR
748-GA-1

2A

W53682 PILT SOLUTION - CONCENTRATE
WOOD PRESERVATIVE - FOR INDUSTRIAL USE ONLY

DANGER! PRESERVES AND PROTECTS WOOD FROM ROT AND MILDEW
KEEP OUT OF THE REACH OF CHILDREN

ACTIVE INGREDIENT: PIS (TRIBUTYL TIN) OXIDE 2.0%
INERT INGREDIENTS: 98.0%

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS & DOMESTIC ANIMALS

DANGER: CORROSIVE, CAUSES SKIN DAMAGE. DO NOT GET ON SKIN, ON CLOTHING, OR IN EYES. WEAR FACE SHIELD AND RUBBER GLOVES WHEN HANDLING. MAY BE FATAL IF SWALLOWED OR INHALED. AVOID BREATHING VAPORS. USE ONLY IN A WELL-VENTILATED AREA. DO NOT BREATHE VAPORS OR SPRAY MIST.

INERT INGREDIENTS CONTAIN: TOLUOL AND N-METHYL 2-PYRROLIDONE

PRACTICAL TREATMENT: IN CASE OF SKIN CONTACT, REMOVE CONTAMINATED CLOTHING AND IMMEDIATELY WASH SKIN WITH SOAP AND WATER. GET MEDICAL ATTENTION. WASH CONTAMINATED CLOTHING BEFORE REUSE. IF IN EYES, FLUSH EYES WITH WATER. GET MEDICAL ATTENTION. IF SWALLOWED, DO NOT INDUCE VOMITING. GET IMMEDIATE MEDICAL ATTENTION. IF INHALED, REMOVE TO FRESH AIR. USE ARTIFICIAL RESPIRATION IF BREATHING HAS STOPPED. GET IMMEDIATE MEDICAL ATTENTION.

FISH AND WILDLIFE HAZARD: THIS PRODUCT IS TOXIC TO FISH AND WILDLIFE. KEEP OUT OF ANY BODY OF WATER. DO NOT CONTAMINATE WATER BY CLEANING EQUIPMENT OR DISPOSAL OF WASTE.

CHEMICAL AND PHYSICAL HAZARDS: FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.
NET CONTENTS: 53 GALLONS

PPG INDUSTRIES INC.
COATINGS AND RESINS DIVISION
ONE GATEWAY CENTER
PITTSBURGH, PA 15222