

W53470P
PILT® 70 Plus Concentrate

WOOD PRESERVATIVE - FOR INDUSTRIAL USE ONLY
PRESERVES AND PROTECTS WOOD FROM ROT AND MILDEW

Active Ingredient:
Bis (Tributyl Tin) Oxide
Other Ingredients:
Total

3.40%
96.60%
100.00%

EPA REG. NO. 748-246
EPA EST. NO. 748-WI-1

KEEP OUT OF REACH OF CHILDREN


DANGER

See back label for additional precautionary statements.

FIRST AID	
Contact 1-304-843-1300 or your Poison Control Center for 24-hour emergency medical treatment information. Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
If in Eyes	<ul style="list-style-type: none">* Hold eye open and rinse slowly and gently with water for 15-20 minutes.* Remove contact lenses, if present, after the first 5 minutes; then continue rinsing eye.* Call a Poison Control Center or doctor for treatment advice.
If Swallowed	<ul style="list-style-type: none">* Call a Poison Control Center or doctor for treatment advice.* Have person sip a glass of water if able to swallow.* Do not induce vomiting unless told by a Poison Control Center or doctor.
If on Skin Or Clothing	<ul style="list-style-type: none">* Take off contaminated clothing.* Rinse skin immediately with plenty of water for 15-20 minutes.* Call a Poison Control Center or doctor for treatment advice.
If Inhaled	<ul style="list-style-type: none">* Move person to fresh air.* If person is not breathing, call 911 or an ambulance, then give artificial respiration.* Call a Poison Control Center or doctor for treatment advice.
NOTE TO PHYSICIAN	
<ul style="list-style-type: none">* Probable mucosal damage may contraindicate the use of gastric lavage.* This product may pose an aspiration pneumonia hazard. Contains petroleum distillate.	

Manufactured by:
PPG Industries, Inc.
One PPG Place
Pittsburgh, PA 15272

06/23/2003

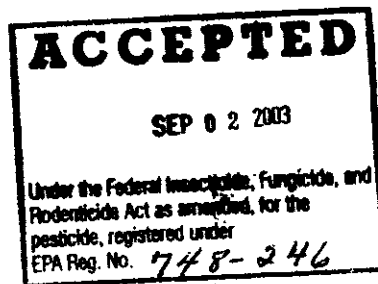

NET CONTENTS: 55 GALLONS

748-246

9/23/2003

Page 1 of 2

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive, causes skin damage. Do not get on skin, on clothing, or in eyes. Wear face shield and rubber gloves when handling. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. Use only in a well-ventilated area.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife. Do not apply directly to water or wet lands. Do not contaminate water by cleaning equipment or disposal of waste. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE
W53470P -- PILT® 70 Plus Concentrate

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

For industrial use only. Must be applied to unpainted, clean, dry wood. Should be used for controlling the concentration of the active ingredient of Ready To Use PILT 70 Plus during its flowcoating or dipping application process according to test procedures furnished to the industrial user.

NOTE TO USER

To equal the composition of Ready To Use PILT 70 Plus, blend one part by volume of W53470P PILT 70 Plus Concentrate with four parts by volume of aliphatic hydrocarbon solvent. To apply as ready to use, immerse the wooden parts by either flowcoating or dipping. Allow the wooden parts to dwell in the flowcoater or dip tank in contact with the PILT 70 Plus a minimum of 15 seconds. Remove from solution and allow the wood to dry at 65-75°F in an area with engineered ventilation from 90 seconds prior to painting. This product is designed to be used to treat wood millwork, plywood, outdoor furniture and siding for above ground applications. Do not use for below or ground contact applications requiring preservative qualities. Use aliphatic hydrocarbon solvent for clean-up solvent. The Plus provides catalytic action in polyurea coating systems applied over treated wood.


Wear protective clothing and rubber gloves when handling freshly treated wooden parts or structures. Protective clothing should be washed before reuse.

STORAGE AND DISPOSAL: Do not contaminate water, food, or feed by storage and disposal.

STORAGE: Do not use or store near heat or open flame.

WOOD PRESERVATIVE DISPOSAL: PILT 70 Plus Concentrate wood preservative flowcoat or dipping material or aliphatic hydrocarbon cleanup solvent that cannot be used according to label instructions must be disposed of according to applicable Federal, State, or Local procedures.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by State and Local authorities.

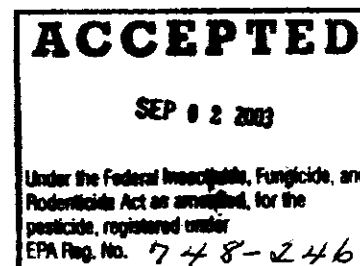

232