

147 250 (M2) 1564

U.S. ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (WH-567) WASHINGTON, D.C. 20460	EPA REGISTRATION NO. 748-20	DATE OF ISSUANCE MAR 15 1985
	TERM OF ISSUANCE	
NOTICE OF PESTICIDE: <input checked="" type="checkbox"/> REGISTRATION <input type="checkbox"/> REREГИSTRATION <i>(Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)</i>	NAME OF PESTICIDE PRODUCT	

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

... ..
 153

160 12 82
18

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

- This product is conditionally registered in accordance with FIFRA sec. 3(c)(2)(A) provided that you:
1. Submit and/or enter all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
 2. Make the labeling changes listed below before you release the product to the user.
 3. Add the phrase "EPA Registration No. 748-20."
 4. Delete "For outdoors."
 5. Submit five (5) copies of your final printed label no before you release the product for shipment. Refer to the A-79 Enclosure for a further description of final printed labeling.
- If these conditions are not complied with, the registration will be automatically canceled in accordance with FIFRA sec. 3(c). Your release for sale of this product is conditional on compliance with these conditions.
- Respectfully,

Henry M. Jacoby
 Product Manager (21)
 Fungicide-Fungicide Branch,
 Registration Division (WH-567)

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL: *[Signature]* DATE: *[Date]*

77-773

AUG-ELN

Water Repellant

Front Panel

Logo

Exterior

ACCEPTED
with COMMENTS
to EPA Letter Dated:

MAR 15 1985

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
as amended, for the pesticide
registered under EPA Reg. No.
748-250

REZ® Stain & Wood Preservative

Semi-Transparent - Oil

Winter White 77-773

EPA Reg. No.

EPA Est. No.

Exceeds Federal Specifications TT-W-572B Paragraph 3.7 for
Water Repellancy

Active Ingredients:

Bis(tributyltin)oxide (TBTO)	0.50%
Folpet [n-([trichloromethyl]thio) phthalimide]	0.80%
Inert Ingredients	98.70%
Total	100.00%

KEEP OUT OF REACH OF CHILDREN
WARNING!
See Back Panel For Additional Precautions

Net 1 Gallon/3.78 L

Back Panel


PRECAUTIONARY STATEMENT - HAZARDS TO HUMANS AND DOMESTIC ANIMALS.

WARNING!
CONTAINS PETROLEUM DISTILLATE AND Bis(tributyltin)oxide and
Folpet [n-([trichloromethyl]thio)phthalimide]

Harmful or fatal if swallowed; may be absorbed through skin.
Causes skin irritation. Avoid breathing vapor or spray mist. Do
not get in eyes, on skin, or on clothing.

FIRST AID STATEMENT: If swallowed, do not induce vomiting. Call
a physician immediately. In case of contact, immediately flush
eyes or skin with plenty of water. Get medical attention if
irritation persists.

Note: Wear goggles, rubber gloves, and protective clothing when
applying or handling treated lumber.

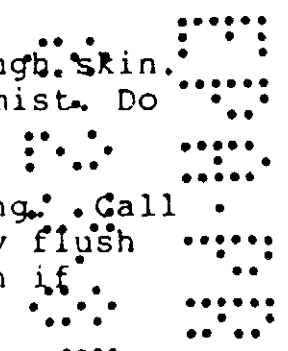

2614
ENVIRONMENTAL HAZARDS: Do not apply directly to water or wetlands. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL/CHEMICAL HAZARDS: Combustible. Keep away from heat, sparks or flame. Use with forced ventilation. Do not take internally. Close container after each use.

STORAGE AND DISPOSAL: Securely wrap original container in several layers of newspaper and discard in trash. Do not reuse container. Rinse thoroughly before discarding in trash.

For Emergency Medical or Spill Control Information, (304) 843-1300.

Important: Spray equipment must be handled with due care and in accordance with manufacturer's recommendations. Spraying of any material can be hazardous. Wear respirator, eye protection, and protective clothing.

REZ® Stain -- Semi-Transparent Oil

This semi-transparent stain helps to preserve wood and repels water. It exceeds the Federal Specification for water repellency, TT-W-572-B Paragraph 3.7.

REZ® stain enhances the natural beauty of wood and resists cracking, peeling, and the fading caused by the effects of the sun's harmful rays. It will also guard against wood rot and mildew growth on the stain film.

Where to Use: Decks, porches, sawn siding, beams, shakes, fencing, shingles, wood trim and previously stained wood surfaces. Do not use below ground, on previously painted wood surfaces, or on abraded plywood.

Directions For Use:

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Coverage: Approx. 300 to 600 sq.ft. (27.8 to 55.7 sq.m) per gallon (3.78 L) depending on wood texture.

Surface Preparation: Surface must be dry and free from dirt, saw dust, loose fibers, mildew, flaking or peeling stain, grease, and other surface contamination. Countersink and spot prime all ferrous nails and fill voids with putty. Sand surface smooth, always with the grain. For woods prone to bleeding, such as redwood or red cedar, white or light colored stains are not recommended.

Application: Stir thoroughly. Apply a full even coat by brush, pad, spray or roller. Apply thoroughly to ends, cuts and edges.

4064

Avoid applying in direct sun light or when surface temperature is below 60° F. (10° C). No thinning is usually required. If necessary, thin up to 25% with a 50/50 mixture of paint thinner and linseed oil. If applied by spray, stains must be back rolled or brushed to provide maximum substrate wetting and penetration to prevent premature failure. Stain effects may vary slightly in color on different species of wood. Test in a remote area before proceeding.

Drying: Normally dries in 2 to 4 hours at 77° F (25° C) and 50% Relative Humidity. May be recoated in 24 hours.

Clean-Up: Paint Thinner

Side Panel

Label Date Code: 20484

PPG Industries, Inc.
Coatings and Resins
Pittsburgh, PA 15272
(412) 434-3131

YOUR SATISFACTION IS GUARANTEED

PPG guarantees your satisfaction with this product. If you're not satisfied, simply return the unused portion of the product to the store where you bought it, with proof of purchase and the dealer will refund your purchase price or furnish you with replacement product whichever you prefer.

