

PILT® 70 Ready to Use

WOOD PRESERVATIVE - FOR INDUSTRIAL USE ONLY
PRESERVES AND PROTECTS WOOD FROM ROT AND MILDEW

Active Ingredient:

Bis (Tributyl Tin) Oxide 0.74%
Other Ingredients: 99.26%
Total 100.00%

EPA REG. NO. 748-257
EPA EST. NO. 748-WI-1

Contains Petroleum Distillates

KEEP OUT OF REACH OF CHILDREN


DANGER

See back label for additional precautionary statements.

FIRST AID	
<i>Contact 1-304-843-1300 or your Poison Control Center for 24-hour emergency medical treatment information. Have the product container or label with you when calling a poison control center or doctor, or going for treatment.</i>	
If in Eyes	<ul style="list-style-type: none">* Hold eye open and rinse slowly and gently with water for 15-20 minutes.* Remove contact lenses, if present, after the first 5 minutes; then continue rinsing eye.* Call a Poison Control Center or doctor for treatment advice.
If Swallowed	<ul style="list-style-type: none">* Call a Poison Control Center or doctor for treatment advice.* Have person sip a glass of water if able to swallow.* Do not induce vomiting unless told by a Poison Control Center or doctor.
If on Skin Or Clothing	<ul style="list-style-type: none">* Take off contaminated clothing.* Rinse skin immediately with plenty of water for 15-20 minutes.* Call a Poison Control Center or doctor for treatment advice.
If Inhaled	<ul style="list-style-type: none">* Move person to fresh air.* If person is not breathing, call 911 or an ambulance, then give artificial respiration.* Call a Poison Control Center or doctor for treatment advice.
NOTE TO PHYSICIAN <ul style="list-style-type: none">* Probable mucosal damage may contraindicate the use of gastric lavage.* This product may pose an aspiration pneumonia hazard. Contains petroleum distillate.	

Manufactured by:
PPG Industries, Inc.
One PPG Place
Pittsburgh, PA 15272

NET CONTENTS: 55 GALLONS

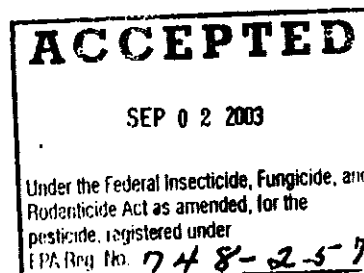

748-257

9/2/2003

Page 183

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive, causes skin damage. Do not get on skin, on clothing, or in eyes. Wear face shield and rubber gloves when handling. Wear protective clothing and rubber gloves when handling freshly treated wooden parts or structures. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. May be fatal if swallowed or inhaled. Do not breathe vapors or spray mist. Use only in a well-ventilated area.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife. Do not apply directly to water or wet lands. Do not contaminate water by cleaning equipment or disposal of waste. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS

Flammable. Do not use or store near heat sources or open flame. Do not use in the vicinity of pilot lights.

DIRECTIONS FOR USE
PILT® 70 Ready to Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

For industrial use only. Must be applied to unpainted, clean, dry wood.

PILT 70 Ready to Use protects against decay producing fungi, staining fungi, and surface mold.


Product Uses: This product is recommended for millwork, shingles (not asbestos), shakes, clapboards, smooth or rough-cut siding, plywood, decks, porches, railings, structural support timbers, flatbeds, cold-frames and greenhouses. Do not use for below or ground contact applications requiring preservative qualities. Do not use on wood that will be used in contact with food, feed or potable water or where prolonged skin contact will occur. Due to the presence of petroleum distillates in this product, do not use on lumber that can be used where dairy cattle or livestock can come in contact with the treated wood.

PILT 70 Ready to Use is used as is. Immerse individual wooden parts by either flowcoating or dipping. Allow the wooden parts to dwell in the flowcoater or dip tank in contact with PILT 70 Ready to Use a minimum of 15 seconds. Bundles of parts should be immersed for three minutes. Remove from the solution and, prior to painting, allow the wood to dry at 65-76°F in an area with engineered ventilation according to the following schedule:

Solvent System	Drying Time
Lacolene	12 hours
Naphtha	24 hours
Xylene	48 hours
All other solvents	72 hours

Use aliphatic hydrocarbon solvent for clean-up solvent.

Cut and machine wood prior to treatment, if possible. If not, liberally apply two coatings of preservative to all joints, cracks, cut ends, holes or other openings.

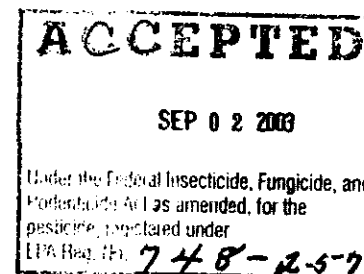

2
23

STORAGE: Do not use or store near heat or open flame.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of federal law. If these wastes cannot be disposed of by using according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance. Do not contaminate water, food, or feed by storage or disposal.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by State and Local authorities.

ACCEPTED
SEP 02 2003
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
Pesticide Registration Office
EPA Reg. Div. 748-257

323