


PILT 77 READY TO USE

KEEP OUT OF REACH OF CHILDREN

CAUTION

WOOD PRESERVATIVE - FOR INDUSTRIAL USE

PRESERVES AND PROTECTS WOOD FROM ROT AND

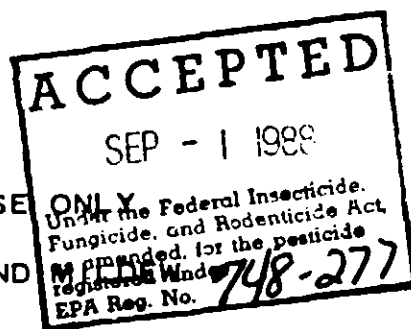

Active Ingredient:

3-Iodo-2-Propynyl Butyl Carbamate .....	0.50%
Inert Ingredients.....	99.50%
Total.....	100.00%

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION: CONTAINS PETROLEUM DISTILLATES. Use only with adequate ventilation. Avoid prolonged breathing of vapors or spray mist. Harmful if swallowed or inhaled. Avoid contact with eyes, skin or clothing. Wear goggles and rubber gloves when handling. Wear rubber gloves and protective clothing when handling freshly treated lumber. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.  
 IF IN EYES: Flush eyes with plenty of water. Get medical attention if irritation persists.  
 IF SWALLOWED: Do not induce vomiting. Promptly drink a large quantity of milk, egg whites or gelatin solution. If these are not available, drink large quantities of water. Avoid alcohol. Get immediate medical attention.  
 IF INHALED: Remove to fresh air. If breathing has stopped, give artificial respiration, preferably mouth to mouth. Get immediate medical attention.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters.

CHEMICAL AND PHYSICAL HAZARDS

Flammable. Do not use or store near heat sources or open flame. Do not use in the vicinity of pilot lights.

NET CONTENTS: \_\_\_\_\_ Gallons  
 \_\_\_\_\_ lbs./gal

DIRECTIONS FOR USE: PILT 77 READY TO USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling. For industrial use only. Must be applied to unpainted, clean, dry wood.

PILT 77 READY TO USE protects against decay producing fungi, staining fungi and surface mold.

PRODUCT USES: This product is recommended for millwork, shingles (not asbestos), shakes, clapboards, smooth or rough-cut siding, plywood, decks, porches, railings, structural support timbers, flatbeds, coldframes and greenhouses. Do not use for below or ground contact applications requiring preservative qualities. Do not use on wood that will be used in contact with food, feed or potable water or where prolonged skin contact will occur. Due to the presence of petroleum distillates in this product, do not use on lumber that can be used where dairy cattle or livestock can come in contact with the treated wood.

PILT 77 READY TO USE is ready-to-use as is. Immerse individual wooden parts by either flowcoating or dipping. Allow the wooden parts to dwell in the flowcoater or dip tank in contact with PILT 77 READY TO USE a minimum of 15 seconds. Bundles of parts should be immersed for 3 minutes. Remove from solution and, prior to painting, allow the wood to dry at 65-75 F in an area with engineered ventilation according to the following schedule:

Solvent system	Drying Time
Naphtha	24 Hours

Use aliphatic hydrocarbon solvent for clean-up solvent.

Cut and machine wood prior to treatment if possible. If not, liberally apply two coatings of preservative to all joints, cracks, cut-ends, holes or other openings.

STORAGE AND DISPOSAL

STORAGE: Do not store near heat sources or open flame.

PESTICIDE DISPOSAL: Wastes resulting from use of this product may be disposed on on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities.

Manufactured by: PPG Industries, Inc.  
Coatings and Resins Division  
One PPG Place  
Pittsburgh, PA. 15272

EPA REG. NO. 748-  
EPA EST. NO. 748-