

PILT® NF4 CONCENTRATE

WOOD PRESERVATIVE - FOR INDUSTRIAL USE ONLY
PRESERVES AND PROTECTS WOOD FROM ROT AND MILDEW

Active Ingredient:

3-iodo-2-propynyl butylcarbamate 2.50%
 Other Ingredients: 97.50%
 Total 100.00%

EPA REG. NO. 748-292

EPA EST. NO. 748-WI-1

Contains Petroleum Distillates


KEEP OUT OF REACH OF CHILDREN

DANGER

See back label for additional precautionary statements.

FIRST AID	
Contact 1-304-843-1300 or your Poison Control Center for 24-hour emergency medical treatment information. Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
If In Eyes	* Hold eye open and rinse slowly and gently with water for 15-20 minutes. * Remove contact lenses, if present, after the first 5 minutes; then continue rinsing eye. * Call a Poison Control Center or doctor for treatment advice.
If Swallowed	* Call a Poison Control Center or doctor for treatment advice. * Have person sip a glass of water if able to swallow. * Do not induce vomiting unless told by a Poison Control Center or doctor.
If on Skin Or Clothing	* Take off contaminated clothing. * Rinse skin immediately with plenty of water for 15-20 minutes. * Call a Poison Control Center or doctor for treatment advice.
If Inhaled	* Move person to fresh air. * If person is not breathing, call 911 or an ambulance, then give artificial respiration. * Call a Poison Control Center or doctor for treatment advice.
NOTE TO PHYSICIAN * Probable mucosal damage may contraindicate the use of gastric lavage. * This product may pose an aspiration pneumonia hazard. Contains petroleum distillate	

Manufactured by:
 PFG Industries, Inc.
 One PFG Place
 Pittsburgh, PA 15272

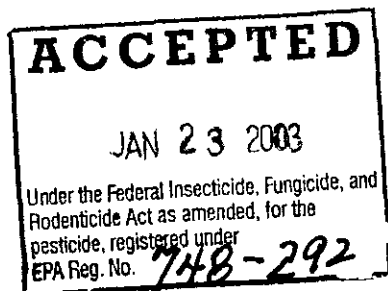

NET CONTENTS: _____ GALLONS
 _____ LBS./GALLON

10/2002

748-292

1/23/2003

1/2

DIRECTIONS FOR USE: PILT® NF4 CONCENTRATE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER

Corrosive. Causes irreversible eye damage. Harmful if swallowed or absorbed through skin. Do not get on eyes or on clothing. Avoid contact with skin. Wear goggles or face shield. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet. Remove contaminated clothing and wash clothing before reuse.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

Applicators and other handlers (including handlers of freshly treated lumber) must wear:

- ✓ Coveralls over short-sleeved shirt and short pants
- ✓ Socks and chemical-resistant footwear
- ✓ Chemical resistant gloves (such as barrier laminate, neoprene rubber, nitrile rubber, or viton)
- ✓ Wear goggles or face shield.

USER SAFETY REQUIREMENTS

Discard clothing or other absorbent materials that have been drenched or heavily contaminated with this product. Do not reuse them. Follow manufacturer's instructions for cleaning/maintaining PPE. If no such instructions exist for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

USER SAFETY RECOMMENDATIONS

Users should: Wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Remove personal protective equipment immediately after handling this product. Wash the outside of gloves before removing. As soon as possible wash thoroughly.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water, to areas where surface water is present or intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment washwaters. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your state Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat sources or open flame. Do not use the product in or on electrical equipment due to the possibility of shock hazard.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage and disposal.

PESTICIDE STORAGE: Do not use or store near heat sources or open flame. Do not use the product in or on electrical equipment due to the possibility of shock hazard.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency, or the hazardous waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities.

GENERAL INFORMATION

PRODUCT USES: This product is recommended for millwork, shingles (not asbestos), shakes, clapboards, smooth or rough-cut siding, plywood, decks, porches, railings, structural support timbers, flatbeds, coldframes and greenhouses.

PILT® NF4 CONCENTRATE protects against decay producing fungi, staining fungi and surface mold.

GENERAL PRECAUTIONS AND RESTRICTIONS

- ✓ Do not apply this product in a way that will contact workers or other persons.
- ✓ For Industrial Use Only
- ✓ Must be applied to unpainted, clean, dry wood.
- ✓ **PILT® NF4 CONCENTRATE** must be reduced with four (4) parts water to make the PILT® NF ready to use. Do not apply as is.
- ✓ Do not use for below or ground contact applications requiring preservative qualities.
- ✓ Do not use on wood that will be used in contact with food, feed or potable water or where prolonged skin contact will occur.
- ✓ Due to the presence of petroleum distillates in this product, do not use on lumber that can be used where dairy cattle or livestock can come in contact with the treated wood.

APPLICATION INSTRUCTIONS

PILT® NF4 CONCENTRATE must be reduced to use. Immerse individual wooden parts by either flowcoating or dipping. Allow the wooden parts to dwell in the flowcoater or dip tank in contact with PILT® NF a minimum of 30 seconds. Bundles of parts should be immersed for 3 minutes. Remove from solution and, prior to painting, allow the wood to dry at 65°-75°F in an area with engineered ventilation. Use water for clean-up solvent. Cut and machine wood prior to treatment if possible. If not, liberally apply two coatings of preservative to all joints, cracks, cut-ends, holes or other openings.

2/12