# **CAUTION: COMBUSTIBLE MIXTURE**

N.Y.F.D. C. of A. No. 4178

### WARNING

May be fatal if swallowed! Do not use near heat or open flame. Do not use as a space spray (AEROSOL or Fogging). Do not breathe vapor or spray mist. Keep out of reach of children. Do not get on skin. In case of contact wash immediately with soap and water. Store this product at temperatures above 50 F. Do not contaminate feed and foodstuffs.

This product is toxic to fish, birds and other wildlife. Birds feeding on treated areas may be killed. Keep out of lakes, streams or ponds. Do not apply where runoff is likely to occur. Do not apply when weather conditions favor drift from areas treated. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

DO NOT USE, POUR SPILL OR STORE NEAR HEAT OR OPEN FLAME.

### ANTIDOTE

02176 303AD

EXTERNAL - In case of spillage on skin, wash promotly with soap and

INTERNAL -- Emetic of 1 tablespoonful mustard in tunibler of water. Call a physician.

### CONTAINER DISPOSAL

Rinse equipment and containers and dispose of wastes by burying in noncroplands away from water supplies. Containers should be disposed of by punching holes in them and burying with wastes, or by burning. Keep out of smoke.

NOTICE — Because Velsicol Chemical Corporation has no control over storage har fling, and conditions of use, which are of critical importance. Velsicol Chemical Corporation makes no representation or warranty, either express or implied for results due to misuse, improper handling or storage of this material. Nor does Velsicol Chemical Corporation assume any responsibility for injury to persons. crops, animals, soil or property arising out of misuse, imprope handling or storage of this material.

# **Directions For Use**

# GOLD CREST H-60 TERMITE CONTROL

To meet FHA termite proofing requirements, consult the latest editions of the Housing and Urban Development (HUD) Minimum Property Standards or send for Velsical Bulletin Number 01-053-502

Add 1 gallon of Gold Crest H-60 emulsifiable to 59 gallons of water for a 0.5% emulsion. Apply the 0.5% emulsion as follows.

When application is by rodding, rods should be inserted one foot apart to the base of the footings. Applications should be made by pressure applied through the tube.


# CONCRETE SLAB-ON-GROUND CONSTRUCTION

- 1 Apply an over-all treatment under entire surface of floor slab. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material apply at the rate of 112 gallons per 10 square feet.
- 2 Under slab-on-ground porch floors and entrance platforms apply an overall treatment at the rate of 1 gallon per 10 square feet.
- 3 Along both sides of foundation walls, along interior foundation walls, and around plumbing rod or dig a narrow trench to a depth of 1 feet, but not



Fungicide, of 2 Polleatic le Not. as omenica for the permuide registered under grant EPA Reg. No. 5

EMULSIFIABLE CONCENTRATE

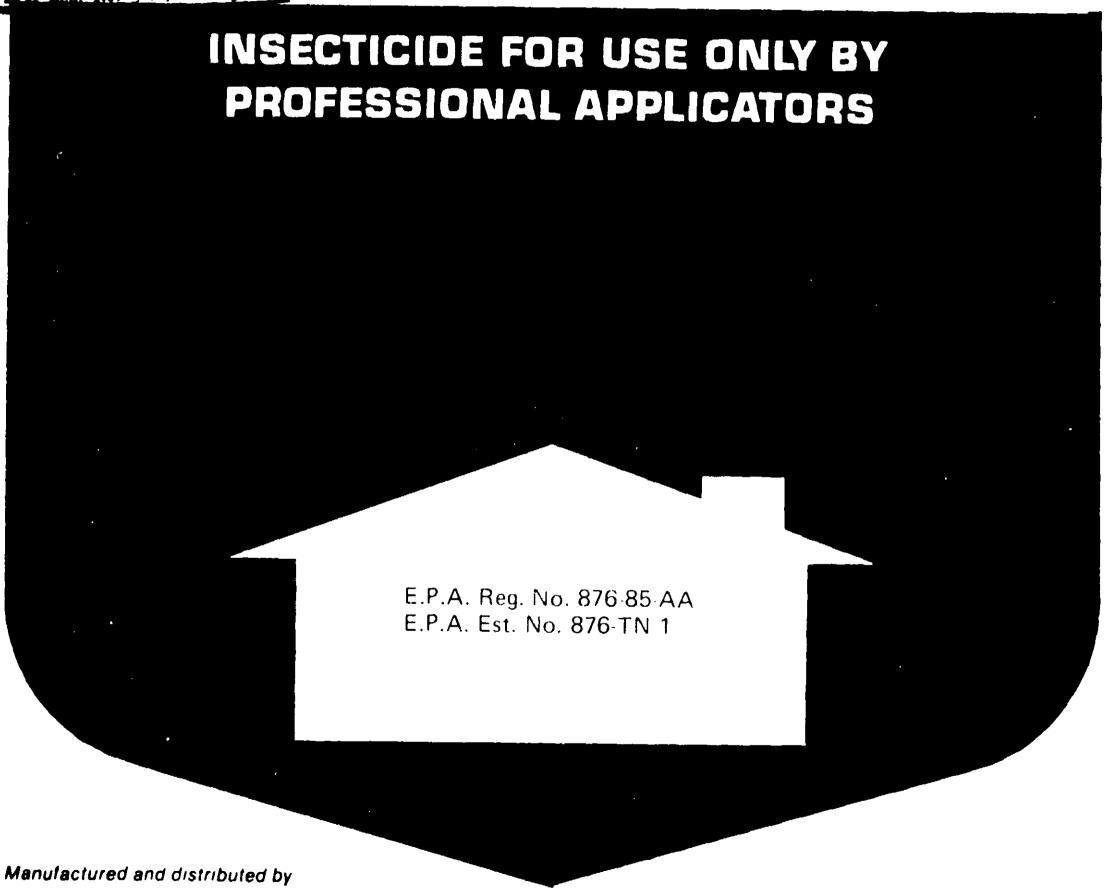

The state of the s

below the should be linear feel being repl

4 Treat all v least 1 qa the footing

### BUILDING

- 1 Rod or di the found 2 gallons be mixed
- 2 Rod or dig the found inches. Ap foot of der per 5 linea as it is bel
- 3 Under atta situations 10 square
- 4 Treat all v 1 gallon pr footing.

## BUILDING

- 1 Apply an ( under attac situations v per 10 squ cinders or half. Where
- 2 Rod or dig foundation of solution with the so
- 3 Along the ( trench to b wider than top of the fi apply anoth fill with a tl to the top 4 soil and an the back fill depth requi greater that narrow tren
- 4 Treat all vo 1 galion pa feoting.

### PRECONS1

If soil is treat the same day, be placed ov where founds -have already 🕻

Premises treat mum of five ya

# **CAUTION: COMBUSTIBLE MIXTURE**

N.Y.F.D. C. of A. No. 4178

### WARNING

May be fatal if swallowed! Do not use near heat or open flame. Do not use as a space spray (AEROSOL or Fogging). Do not breathe vapor or spray mist. Keep out of reach of children. Do not get on skin. In case of contact, wash immediately with soap and water. Store this product at temperatures above 50 F. Do not contaminate feed and foodstuffs.

This product is toxic to fish, birds and other wildlife Birds feeding on treated areas may be killed. Keep out of lakes, streams or ponds. Do not apply where runoff is likely to occur. Do not apply when weather conditions favor drift from areas treated. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.

### ANTIDOTE

**EXTERNAL** — In case of spillage on skin, wash promptly with soap and water.

INTERNAL — Emetic of 1 tablespoonful mustard in tunibler of water. Call a physician.

#### CONTAINER DISPOSAL

Rinse equipment and containers and dispose of wastes by burying in non-croplands away from water supplies. Containers should be disposed of by punching holes in them and burying with wastes, or by burning. Keep cut of smoke.

NOTICE — Because Velsicol Chemical Corporation has no control over storage, handling, and conditions of use, which are of critical importance, Velsicol Chemical Corporation makes no representation or warranty, either express or implied, for results due to misuse, improper handling or storage of this material. Nor does Velsicol Chemical Corporation assume any responsibility for injury to persons, crops, animals, soil or property arising out of misuse, improper handling or storage of this material.

# **Directions For Use**

### **GOLD CREST H-60 TERMITE CONTROL**

To meet FHA termite proofing requirements, consult the latest editions of the Housing and Urban Development (HUD) **Minimum Property Standards** or send for Velsicol Bulletin Number 01-053-502.


Add 1 gallon of Gold Crest H-60 emulsifiable to 59 ga lons of water for a 0.5% emulsion. Apply the 0.5% emulsion as follows.

When application is by rodding, rods should be inserted one foot apart to the base of the footings. Applications should be made by pressure applied through the tube.

#### CONCRETE SLAB-ON-GROUND CONSTRUCTION

- 1 Apply an over-all treatment under entire surface of floor slab. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material, apply at the rate of 1½ gallons per 10 square feet.
- 2 Under slab-on-ground porch floors and entrance platforms apply an overall treatment at the rate of 1 gallon per 10 square feet.
- 3 Along both sides of foundation walls, along interior foundation walls, and around plumbing, rod or dig a narrow trench to a depth of 1 foot, but not

FEB 6 1976
Under the Federal Insecticide, Fungicide, and Rodeaticide Act, as amended, for the pesticide

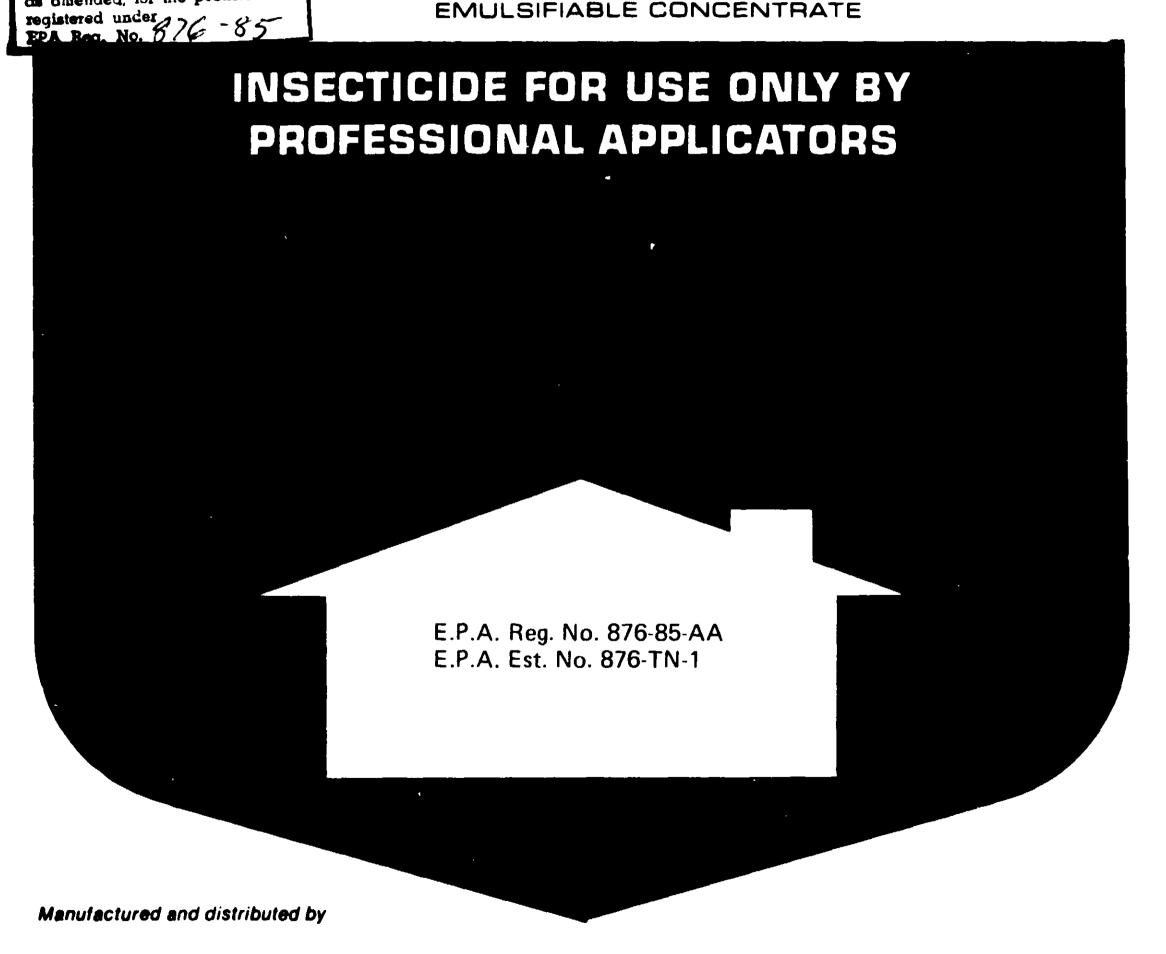

VELSICOL CHEMICAL CORPORATION 341 E. Ohio Street, Chicago, Illinois 60611

below the should be linear fee being rep

4 Treat all least 1 grant the footing

### BUILDING

- 1 Rod or d the found 2 gallons be mixed
- 2 Rod or di the found inches. A foot of de per 5 line as it is be
- 3 Under att situations 10 square
- 4 Treat all 1 gallon proofing.

## BUILDING

- 1 Apply an under atta situations per 10 sc cinders of half. Who
- half. Whe
  Rod or diffoundation
  of solution
  with the se
- 3 Along the trench to wider than top of the apply and fill with a to the top soil and a the back findepth requirements.
- 4 Treat all v 1 gallon p footing.

#### **PRECONS**

If soil is trea the same day be placed of where found have already

Premises treamum of five y

02176-303AD

# **XTURE**

me. Do not use vapor or spray ase of contact, temperatures

ds feeding on ponds. Do not ther conditions by cleaning of specified on

PEN FLAME.

with soap and

of water. Call

burying in nondisposed of by ming. Keep out

ol over storage, elsicol Chemical or implied, for terial. Nor does jury to persons, dling or storage

itest editions of perty Standards

s of water for a

l one foot apart by pressure ap-


### ON

r slab. Apply at ill under slab is the rate of 1½

s apply an over-

lation walls, and of 1 foot, but not



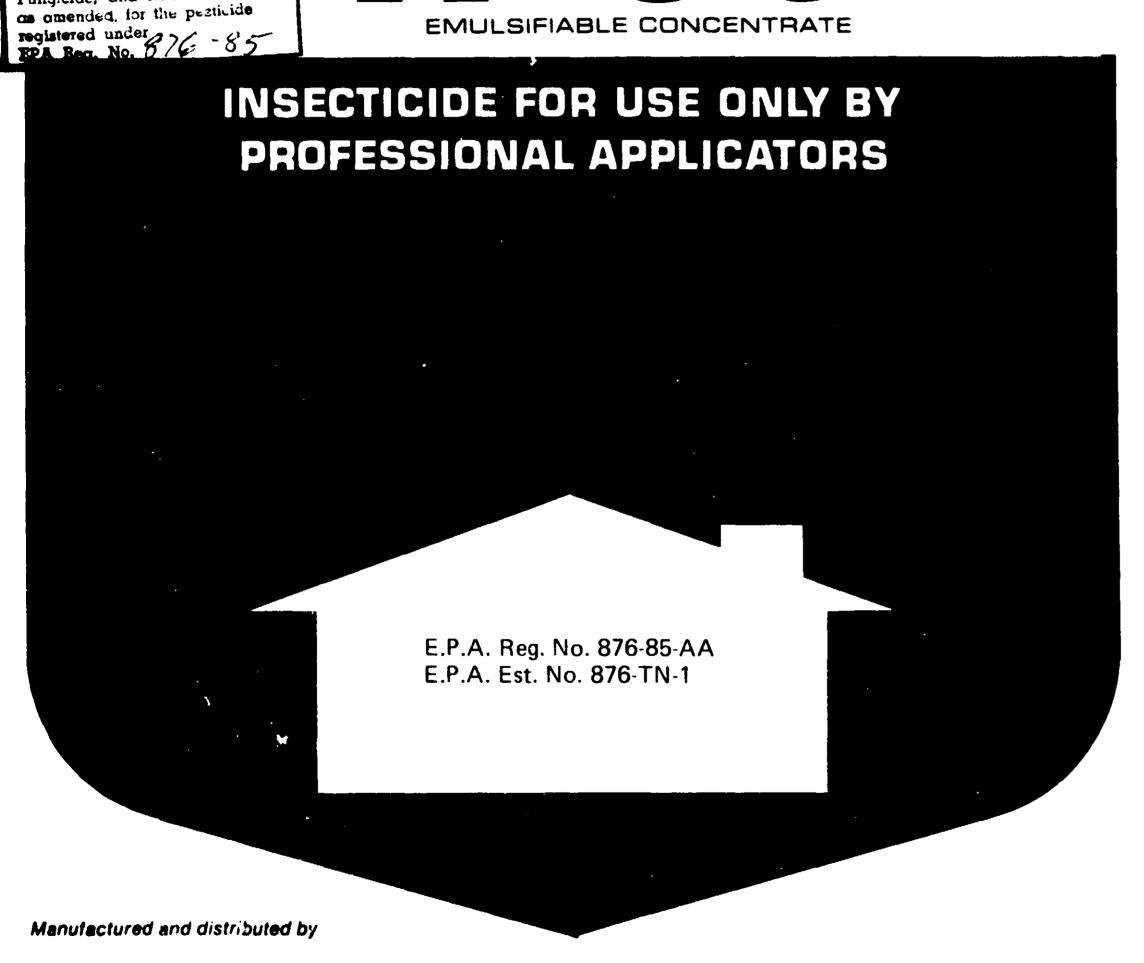

VELSICOL CHEMICAL CORPORATION 341 E. Ohio Street, Chicago, Illinois 60611

### **Use Directions (Continued)**

below the top of the footing. Along outside foundation walls, trench should be no wider than six inches. Apply at the rate of 2 gallons per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.

4 Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

### **BUILDINGS WITH CRAWL SPACES**

- 1 Rod or dig a narrow trench to the top of the footing along the inside of the foundation walls, around piers, sewers, pipes and conduits. Apply 2 gallons of solution per 5 linear feet. When trenching, chemical should be mixed with the soil as it is being replaced in the trench.
- 2 Rod or dig a narrow trench to the top of the footing along the outside of the foundation wall. If a trench is dug, it should be no wider than six inches. Apply 2 gallons of solution per 5 linear feet of trench per each foot of depth. Rodding or trenching 3 feet deep would require 6 gallons per 5 linear feet. When trenching, chemical should be mixed with the soil as it is being replaced in the trench.
- 3 Under attached porches, entrance platforms, utility entrances and similar situations where slab or fill is at the same grade level apply 1 gallon per 10 square feet of soil surface.
- 4 Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

### **BUILDINGS WITH BASEMENTS**

- 1 Apply an over-all treatment under the basement floorings, as well as under attached porches, entrance platforms, utility entrances and similar situations where slab fill is at the grade level. Apply at the rate of 1 gallon per 10 square feel, except that if fill under slab is of washed gravel, cinders or similar coarse material, increase the dosage by at least one-half. Where crawl spaces exist, treat as described in part 2 below.
- 2 Rod or dig a narrow trench to the top of the footing along the inside of foundation walls, around piers, sewer pipes and conduits. Apply 2 gallons of solution per 5 linear feet. When trenching, chemical should be mixed with the soil as it is being replaced in the trench.
- 3 Along the outside of foundation walls, rod or dig a narrow trench, such trench to be dug no deeper than the top of the footings and to be no wider than six inches. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per lineal feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a maximum depth required alongside foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to a 30" depth, make a narrow trench and rod to footing, spacing the holes about 1 foot apart.
- 4 Treat all voids in hollow masonry units of the foundation at the rate of 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

### PRECONSTRUCTION TREATMENT

If soil is treated and the concrete slab is not poured shortly thereafter on the same day, a polyethylene sheeting or other waterproof material should be placed over the treated soil. However, this procedure is not required where foundation cinder blocks or bricks surrounding the treated area have already been installed.

Premises treated with Gold Crest H-60 will give residual control for a minimum of five years.