



**WARNING**

May be fatal if swallowed! Do not use near heat or open flame. Do not breathe vapor or spray mist. Keep out of reach of children. Do not get on skin. Contact with skin causes toxic symptoms. In case of contact, wash immediately with soap and water.

Store this product at temperatures above 50°F. Do not contaminate feed or foodstuffs.

This product is toxic to fish, birds and other wildlife. Birds and other wildlife in treated areas may be killed. Keep out of ponds, streams, or ponds. Do not apply where runoff is likely to occur. When weather conditions favor drift from areas treated, take steps to minimize drift by cleaning of equipment or disposal of this product only as specified on this label.

**DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.**

**ANTIDOTE**

**EXTERNAL**—In case of spillage on skin, wash promptly with soap and water.

**INTERNAL**—Emetic of 1 tablespoonful mustard in tumbler of water. Call a physician.

**CONTAINER DISPOSAL**

Rinse equipment and containers and dispose of wastes by burying in noncroplands away from water supplies. Containers should be disposed of by punching holes in them and burying with wastes, or by burning. Keep out of smoke.

**DIRECTIONS FOR USE**

**GOLD CREST TERMIDE—TERMITE CONTROL**

Add 1 gallon of Gold Crest Termide emulsifiable to 99 gallons of water for an emulsion containing 0.5% chlordane and 0.25% heptachlor. Apply the emulsion as follows.


When application is by rodding, rods should be inserted one foot apart to the base of the footings. Applications should be made by pressure applied through the tube.

**CONCRETE SLAB-ON-GROUND CONSTRUCTION**

1. Apply an over-all treatment under entire surface of floor slab. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material, apply at the rate of 1½ gallons per 10 square feet.
2. Under slab-on-ground porch floors and entrance platforms apply an over-all treatment at the rate of 1 gallon per 10 square feet.
3. Along both sides of foundation walls, along interior foundation walls, and around plumbing, rod or dig a narrow trench to a depth of 1 foot, but not below the top of the footing. Along outside foundation walls, trench should be no wider than six inches. Apply at the rate of 2 gallons per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.
4. Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

**BUILDINGS WITH CRAWL SPACES**

1. Rod or dig a narrow trench to the top of the footing along the inside of the foundation walls, around piers, sewers, pipes and

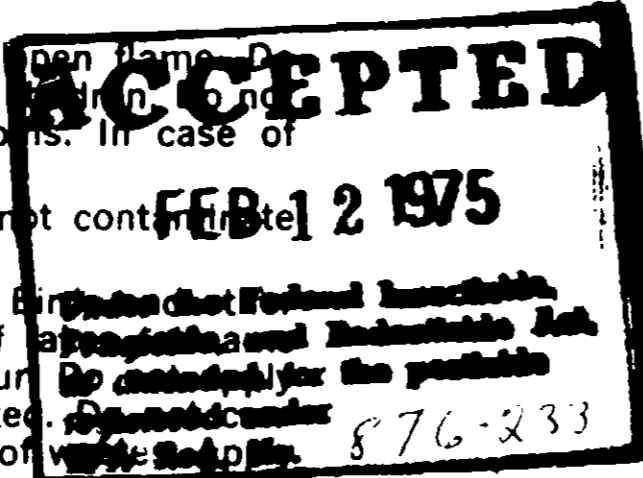

**GOLD CREST**

**TERMIDE**

EMULSIFIABLE CONCENTRATE

**INSECTICIDE FOR SUBTERRANEAN TERMITE CONTROL**

For Use Only By Professional Applicators


Contains 4.2 lbs. Chlordane and 2.1 lbs. Actual Heptachlor Per Gallon

ACTIVE INGREDIENTS	
Technical Chlordane	39.22
Heptachlor	19.60
Related Compounds	6.84
Xylene range aromatic petroleum derivative solvent	29.29
INERT INGREDIENTS	5.00
<b>TOTAL</b>	<b>100.00</b>

**WARNING**

See Left Panel For Antidote

And Additional Warning Statements

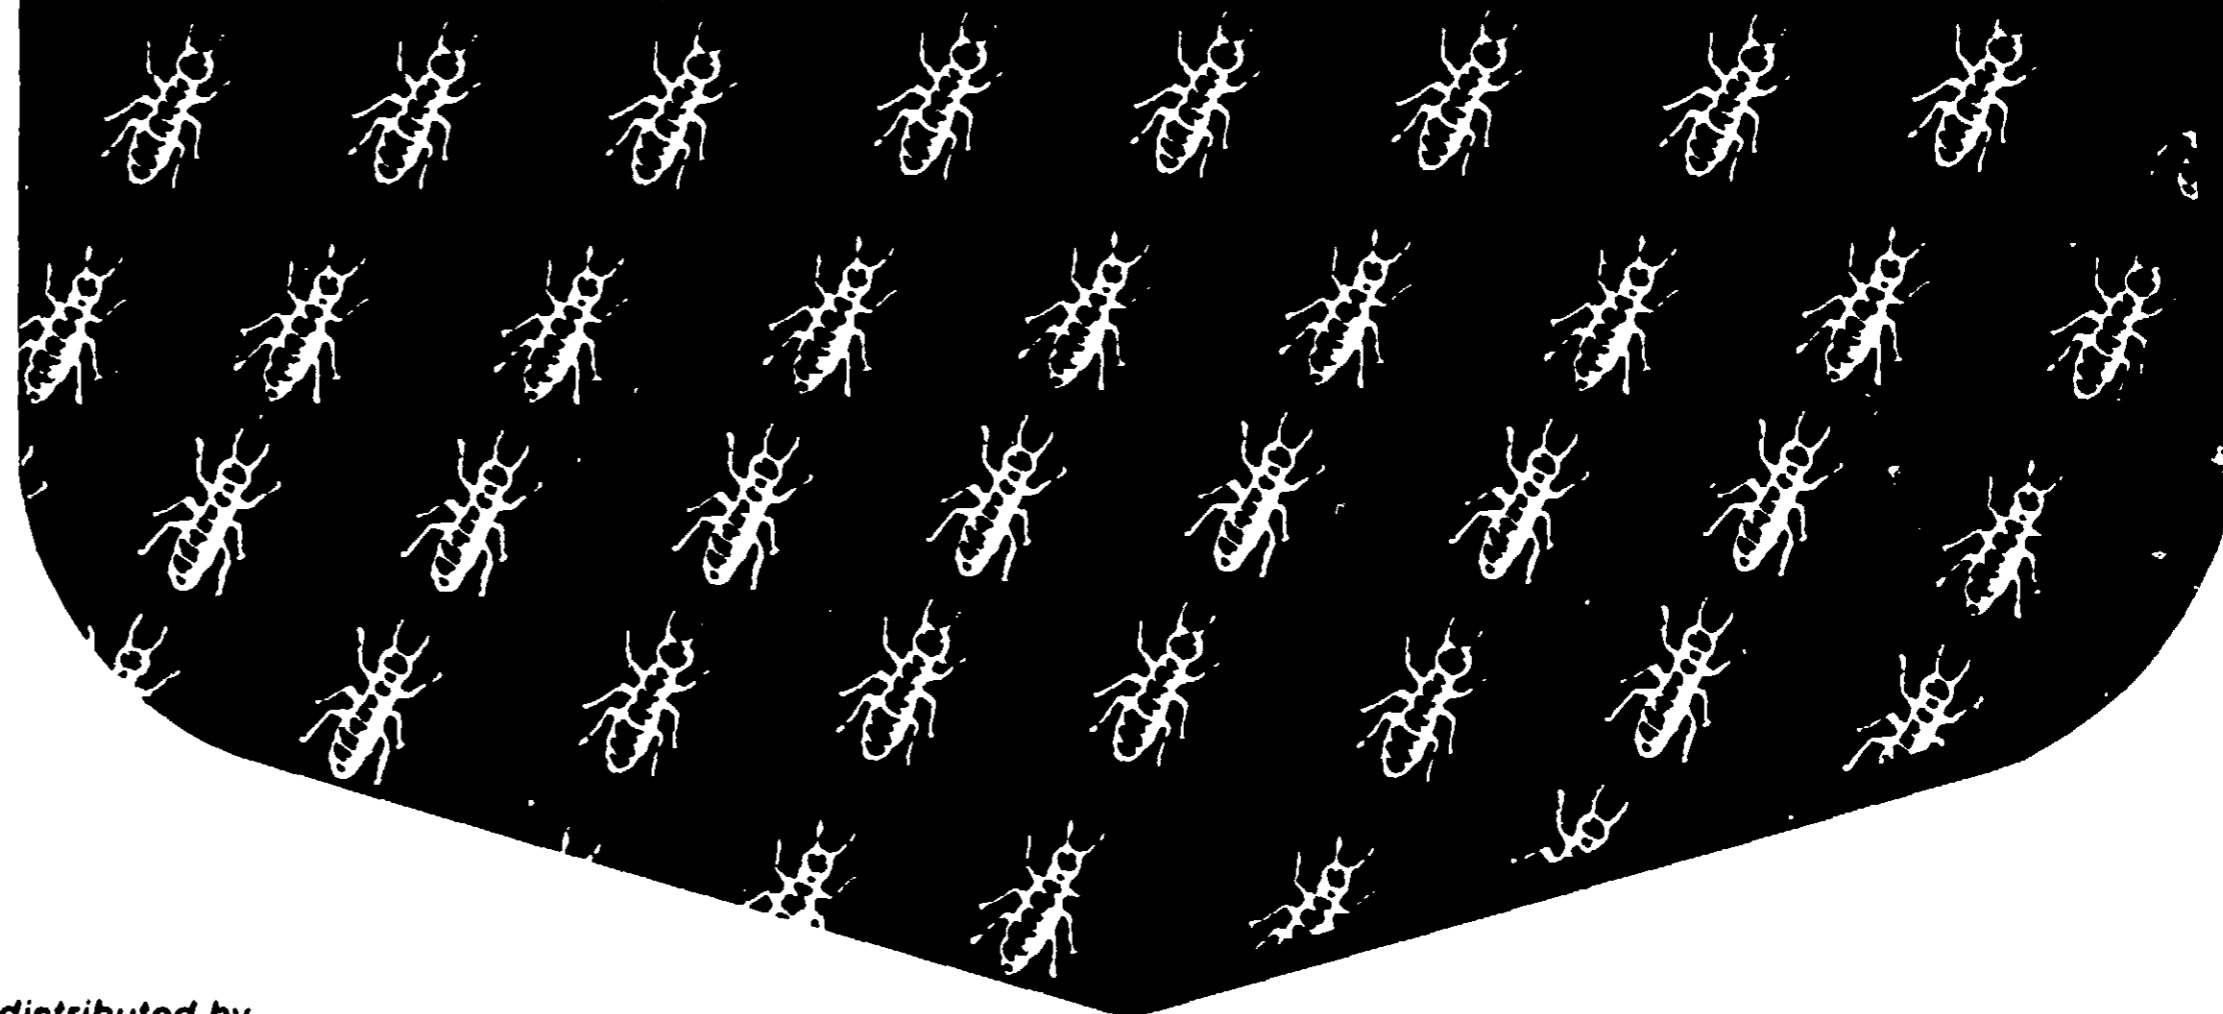

*distributed by*

**VEGETICOL CHEMICAL CORPORATION** 341 E. Ohio Street, Chicago, Illinois 60611

conduits  
trenching  
replaced

2. Rod or dig a narrow trench to the top of the footing along the inside of the foundation walls, around piers, sewers, pipes and
3. Under slab-on-ground porch floors and entrance platforms apply an over-all treatment at the rate of 1 gallon per 10 square feet.
4. Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

**BUILDINGS**

1. Apply an over-all treatment under entire surface of floor slab. Apply at the rate of 1 gallon per 10 square feet, except that if fill under slab is gravel or other coarse absorbent material, apply at the rate of 1½ gallons per 10 square feet.
2. Rod or dig a narrow trench to the top of the footing along the inside of the foundation walls, around piers, sewers, pipes and
3. Along both sides of foundation walls, along interior foundation walls, and around plumbing, rod or dig a narrow trench to a depth of 1 foot, but not below the top of the footing. Along outside foundation walls, trench should be no wider than six inches. Apply at the rate of 2 gallons per 5 linear feet of trench. The chemical should be mixed with the soil as it is being replaced in the trench.
4. Treat all voids in hollow masonry units of the foundation at the rate of at least 1 gallon per 5 linear feet of wall. Apply the emulsion so as to reach the footing.

**PRECONSTRUCTION**

If soil is treated after on the material should be replaced. This procedure is not recommended for rounding the

**NOTICE**—Because of the toxicity of this product, special handling, and special disposal procedures are required. For more information, contact the manufacturer. No liability is assumed for injury to persons or property resulting from improper handling.