Note: This is a reference cited in *AP 42, Compilation of Air Pollutant Emission Factors, Volume I Stationary Point and Area Sources.* AP42 is located on the EPA web site at www.epa.gov/ttn/chief/ap42/

The file name refers to the reference number, the AP42 chapter and section. The file name "ref02_c01s02.pdf" would mean the reference is from AP42 chapter 1 section 2. The reference may be from a previous version of the section and no longer cited. The primary source should always be checked.

1992

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

Prepared for:

USS CLAIRTON WORKS
A DIVISION OF USX CORPORATION
CLAIRTON, PA

Prepared by:

KEYSTONE ENVIRONMENTAL RESOURCES
3000 TECH CENTER DRIVE
MONROEVILLE, PA 15146

PROJECT NUMBER: 605048-01

NOVEMBER 1992

ALLEGHENY COUNTY HEALTH DEPARTMENT

CORRESPONDENCE TRANSMITTAL MEMO

FROM C.J. GOETZ DATE 11-24-92

TO	DATE REC'D.	INITIAL
H.L. PATEL \ Phil Lawrance	11/30	PL
R.C. WESTMAN	11/30	RW
G.L	11/24	[illegible]
~~A.H. FIESEL~~	12/2/92	AHF
→ WGG/WUC		

- ☐ Note & Forward
- ~~☒ Note & Return~~
- ☒ Note & File
- ☐ For Your Approval
- ☒ For Your Information
- ☐ Prepare Reply – My Signature
- ☐ See Me About This
- ☐ Take Charge of This
- ☐ Comment & Return
- ☐ For Your Signature
- ☐ Per Your Request
- ☐ Reply Direct – Send Me Copy

REMARKS

Return in Engineering file.

CJG

16CS0680

USS
Clairton Works
400 State Street
Clairton, PA 15025

RECEIVED
NOV 1 3 1992
DEPUTY DIRECTOR
Bureau of Air Pollution Control

November 10, 1992

Director
Bureau of Air Quality Control
Department of Environmental Resources
P.O. Box 2063
Harrisburg, PA 17120

Deputy Director
Allegheny County Health Department
Bureau of Air Pollution Control
301 Thirty-ninth Street
Pittsburgh, PA 15201

U.S. Environmental Protection Agency
Region III
841 Chestnut Building
Philadelphia, PA 19017

Office of Chief Counsel
Western Region
Department of Environmental Resources
400 Waterfront Drive
Pittsburgh, PA 15222-4745

Gentlemen:

Subject: Compliance Demonstration
Clairton Battery Stack #9

Please find enclosed with this letter the mass emission report on #9 Battery combustion stack. The compliance demonstration was conducted at USS Clairton Works, a division of USX Corporation, on October 8-9, 1992.

For further details on this report, please contact William C. Graeser at (412) 233-1467.

Very truly yours,

G. T. Weber, Jr.
General Manager
USS Clairton Works

GTW/BAC
Attachment

TABLE OF CONTENTS

Page

ABSTRACT iii

1.0 INTRODUCTION 1-1

2.0 METHODOLOGIES 2-1

3.0 RESULTS 3-1

LIST OF TABLES

Table 3-1 Particulate Matter Emissions Data 3-1a

Table 3-2 Visible Emissions Data Summary 3-2a

LIST OF FIGURES

Figure 2-1 Schematic of the Stack and Traverse Points 2-1a

APPENDICES

APPENDIX A TEST PROTOCOL
APPENDIX B OPERATIONAL DATA
APPENDIX C CALIBRATION RESULTS
APPENDIX D FIELD DATA SHEETS
APPENDIX E EMISSIONS CALCULATIONS
APPENDIX F ANALYTICAL RESULTS
APPENDIX G VISIBLE EMISSIONS DATA

ABSTRACT

On October 8 and 9, 1992, a compliance test program was conducted for USS Clairton Works, Clairton, PA, on the #9 Battery Combustion Stack. The purpose of the testing was to determine the (1) concentration and mass emission rates of particulate matter, and (2) presence and extent of visible emissions from the stack as required by the Amended Mon Valley Consent Decree, Paragraph V. A. (6) and Appendix 4. A.

The allowable particulate matter concentration for #9 Battery Combustion Stack, as required by the Amended Mon Valley Consent Decree, is 0.030 gr/dscf. The results of three test runs produced an average particulate matter concentration and emission rate of 0.0052 gr/dscf and 1.79 lb/hr, respectively. Thus, the particulate matter emissions from the stack are in compliance. The Amended Mon Valley Consent Decree requires that visible emissions shall not equal or exceed 20 percent opacity for a period or periods aggregating in excess of 3 minutes in any 60-minute period and shall never equal or exceed 60 percent opacity. Plume opacity is determined and recorded at 15 second intervals for the duration of each stack test. For the first and third test runs, the greatest opacity was 5 percent. During the second test run, there were three consecutive readings of 20 percent opacity immediately followed by one reading of 25 percent (the highest opacity recorded). Thus, the visible emissions are in compliance.

1.0 INTRODUCTION

On October 8 and 9, 1992, a compliance test program was conducted for USS Clairton Works, Clairton, PA, on the #9 Battery Combustion Stack. The purpose of the testing was to determine the (1) concentration and mass emission rate of particulate matter, and (2) presence and extent of visible emissions from the stack as required by the Amended Mon Valley Consent Decree, Paragraph V. A. (6) and Appendix 4. A.

Testing was performed by the Air Quality Engineering Division of Keystone Environmental Resources (Keystone). The test crew was comprised of David Beranek, Richard Casselberry, and Mark Valerio. Visible emissions determinations were performed by James McKoy of Environmental Technical Services (ETS). Keystone and ETS are divisions of the Chester Environmental Group. All test procedures were witnessed by Phil Lawrence of the Allegheny County Health Department Bureau of Air Pollution Control (BAPC).

The test program took place over two days, not the anticipated one day, due to a delay in the operation of the Battery #9. On the morning of October 8, 1992, after the completion of the first test run, Keystone was notified that no pushing or charging would take place on the battery for approximately two hours. Thus, no sampling occurred during this time period. Once normal operation of the battery was resumed (about 3:00 PM), the second run of the particulate matter sampling began. The third test run was conducted on the following day, October 9, 1992.

2.0 METHODOLOGIES

The compliance test program was conducted in accordance with the emissions measurement test protocol, which can be found in Appendix A.

Particulate matter sampling was performed in accordance with EPA Stationary Source Sampling Methods 1 through 5 and Sections 139.11 and 139.12 of the Pennsylvania Department of Environmental Resources (PA DER) Source Testing Manual. Three two-hour tests were executed during normal, maximum operation and production of the battery.

The process exhausts through a 114 inch inside diameter stack. A total of 24 traverse points, 12 per diameter, were sampled; the traverse points were calculated in accordance with EPA Method 1. Sampling was conducted through four equally spaced ports, with six traverse points sampled per port. Each traverse point was sampled for 5 minutes, thus bringing the total sampling time to 120 minutes for each test run. A schematic diagram of the combustion stack and traverse points can be found in Figure 2-1.

In accordance with EPA Method 2, velocities and volumetric flow rates of the exhaust gas were determined using a calibrated S type pitot tube. Positive and negative pitot lines were leak-checked at the beginning and end of each test run. Gas velocity differential pressures along with stack gas temperatures were recorded at each sampling point.

At the beginning and end of each test, gas concentrations of carbon dioxide (CO_2), oxygen (O_2), and nitrogen (N_2, by difference) were determined with the use of a Bacharach "Fyrite" apparatus as specified by EPA Method 3. Gas concentrations were used to obtain molecular weight of the process gas on a dry basis.

Percent moisture content, by volume, of the exhaust gas was determined by measuring the weight gain of the four sample train impingers in accordance with EPA Method 4.

As specified by EPA Method 5, each sampling train was assembled as required by the method, leak-checked on site at the beginning and end of each test run, and operated such that isokinetic conditions were maintained. Clean up of the sampling train included an acetone rinse of the front-half components of the sample train. The acetone rinses were

FIGURE 2-1

USS CLAIRTON WORKS
CLAIRTON, PA

#9 BATTERY COMBUSTION STACK
SCHEMATIC OF THE STACK AND TRAVERSE POINTS

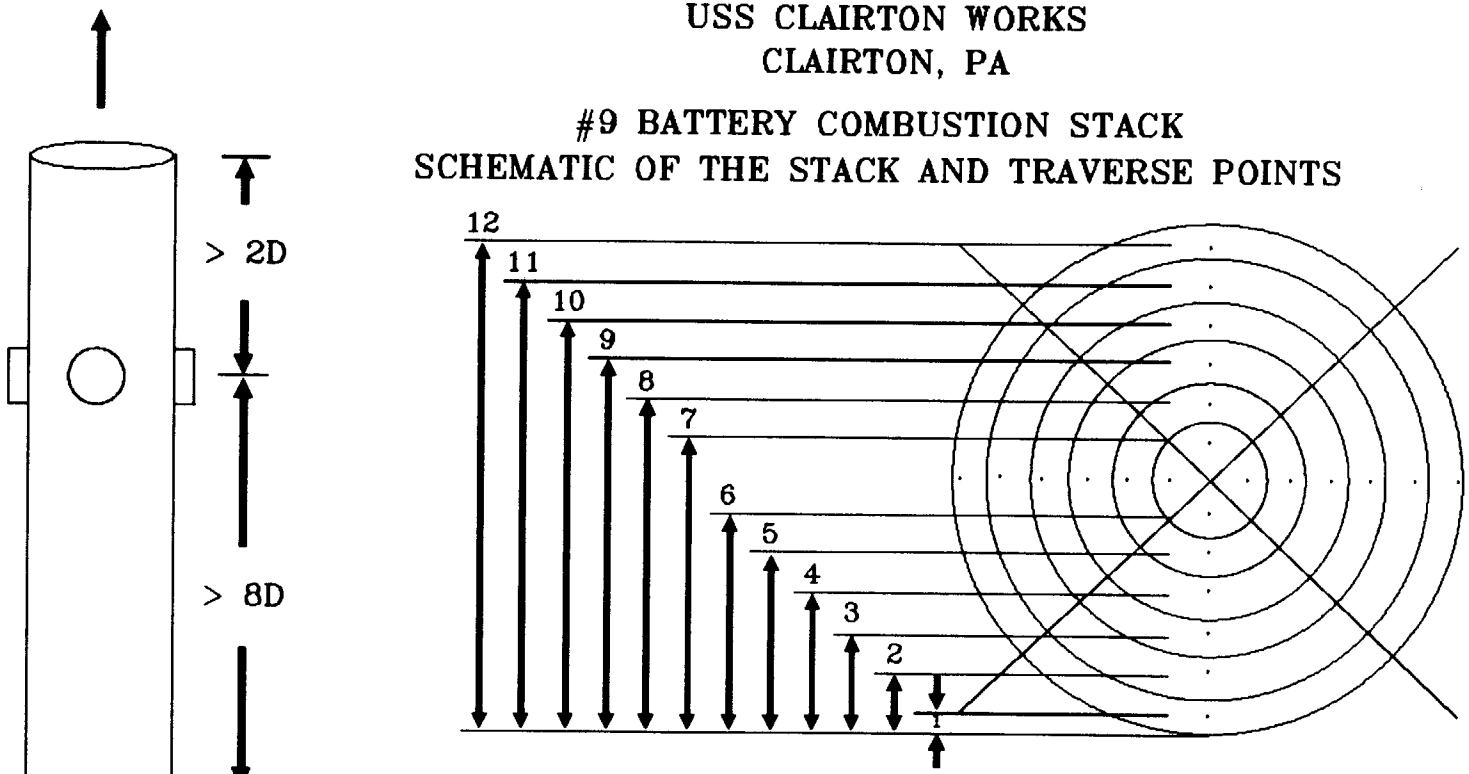

Stack Diameter (D) = 114 inches

Traverse Point	Distance (in.)	Traverse Point	Distance (in.)
1	2.4	7	73.5
2	7.6	8	85.5
3	13.5	9	93.8
4	20.2	10	100.5
5	28.5	11	106.4
6	40.6	12	111.6

KEYSTONE
ENVIRONMENTAL RESOURCES, INC.

evaporated to dryness, desiccated, and weighed to a constant weight. The sample train filters were dried, desiccated for 24 hours, and weighed to a constant weight. Rinse residue weights and filter weights were measured to the nearest 0.1 milligram. One acetone blank was prepared in the same manner as the test sample acetone rinses. The blank residue weight was subtracted from the test sample rinse residue weights. Front-half acetone rinse residue weights (after blank correction) and sample train filter weights were used to determine total particulate matter catch.

All visible emissions determinations were performed in accordance with EPA Stationary Source Sampling Method 9.

3.0 RESULTS

All testing was performed during periods of normal plant operation. To validate this, copies of the operational data can be found in Appendix B.

All sampling equipment was calibrated and operated in accordance with EPA Stationary Source Sampling Methods 1 through 5. Copies of the pre-test calibration results, post-test calibration results, and the results of an audit conducted with a critical orifice provided by the Allegheny County Health Department BAPC can be found in Appendix C.

Copies of the field data sheets for the particulate matter sampling can be found in Appendix D. The emissions calculations for each test can be found in Appendix E. Analytical results for the three test runs can be located in Appendix F.

The test results for particulate matter have been summarized in Table 3-1. As promulgated by the Amended Mon Valley Consent Decree, Paragraph V.A.(6), the allowable particulate matter concentration for #9 Battery Combustion Stack is 0.030 gr/dscf. The results of the testing yielded an average particulate matter concentration and emission rate of 0.0052 grains per dry standard cubic feet (gr/dscf) and 1.79 pounds per hour (lb/hr), respectively. The actual particulate matter concentration is less than the allowable concentration, thus, the particulate matter emissions from the stack are in compliance.

Table 3-1 also lists other pertinent stack and sampling parameters which include stack gas flow rate expressed in units of actual cubic feet per minute (acfm), standard cubic feet per minute (scfm), and dry standard cubic feet per minute (dscfm), moisture content of the stack gas (percent by volume), stack gas temperature (^{o}F), gas volume sampled for each test in units of dry standard cubic feet (dscf), and the isokinetics value for each test. The isokinetics value is equal to the ratio of the average linear gas velocity sampled through the probe nozzle to the average stack gas velocity. An isokinetics value between 90 percent and 110 percent is considered acceptable. Isokinetic values for the three test runs were 102.6 percent, 98.6 percent, and 103.7 percent; therefore, all values were within the acceptable range. PA DER Source Testing Manual, Section 139.12 (4) requires that a minimum of 50 dscf be sampled for each test run. The sample volumes for test runs one

TABLE 3-1

USS CLAIRTON WORKS
CLAIRTON, PA

#9 BATTERY COMBUSTION STACK
PARTICULATE MATTER EMISSIONS DATA

		Run 1	Run 2	Run 3	Average
Test Number		CLR-BS9-1	CLR-BS9-2	CLR-BS9-3	
Test Date		10/8/92	10/8/92	10/9/92	
Mass Emission Rate and Concentration					
Particulate Matter	(lb/hr)	1.31	2.21	1.86	1.79
	(gr/dscf)	0.0037	0.0064	0.0055	0.0052
Stack Conditions					
Flow Rate	(acfm)	84900	83380	84890	84390
	(scfm)	45670	45510	44770	45320
	(dscfm)	41750	40400	39600	40580
Temperature	(°F)	500.5	483.3	514.7	499.5
Moisture Content	(%)	8.6	11.2	11.6	10.5
Sampling Conditions					
Test times		8:53 to 9:23	15:04 to 15:34	12:08 to 12:38	
		9:33 to 10:03	15:46 to 16:16	12:44 to 13:14	
		10:10 to 10:40	16:25 to 16:55	13:20 to 13:50	
		10:48 to 11:18	17:02 to 17:32	13:58 to 14:28	
Sampling Time	(minutes)	120	120	120	
Sample Volume	(dscf)	74.838	69.612	71.731	
Isokinetics	(%)	102.6	98.6	103.7	

through three are 74.838 dscf, 69.612 dscf, and 71.731 dscf, respectively, therefore, this requirement has been met. Actual test sampling times have also been included in Table 3-1.

Visible emissions data is summarized in Table 3-2. Visible emissions were recorded continuously for all three test runs. As promulgated by the Amended Mon Valley Consent Decree, Paragraph V. A. (6), the "visible emissions shall not equal or exceed 20 percent opacity for a period or periods aggregating in excess of 3 minutes in any 60-minute period and shall never equal or exceed 60 percent opacity." Plume opacity is determined and recorded at 15 second intervals for the duration of each stack test. The highest visible emissions readings were recorded during the second test run. There were three consecutive readings of 20 percent opacity followed immediately by one reading of 25 percent opacity. The opacities for the first and third test runs did not exceed 5 percent. Thus, the visible emissions are in compliance. Copies of the field data sheets for the visible emissions readings can be found in Appendix G.

TABLE 3–2

USS CLAIRTON WORKS
CLAIRTON, PA

#9 BATTERY COMBUSTION STACK
VISIBLE EMISSIONS DATA

Run Number	1	2	3
Observation Date	10–8–92	10–8–92	10–9–92
Observation Time	8:45 to 11:45	15:05 to 17:35	12:00 to 14:30
Total Number of Readings	720	600	600
Number of Readings with Opacity ≤ 20%	720	599	600
Greatest Opacity	5%	25%	5%

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

APPENDIX A

TEST PROTOCOL

KEYSTONE
ENVIRONMENTAL RESOURCES, INC.

TEST PROTOCOL
COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

Particulate matter sampling will be performed in accordance with EPA Stationary Source Sampling Methods 1 through 5 (40 CFR, Part 60, Appendix A) and Sections 139.11 and 139.12 of the Pennsylvania Department of Environmental Resources (PA DER) Source Testing Manual. Three two-hour tests will be executed during normal operating conditions. Greater than 50 dry standard cubic feet of sample gas will be collected during each test run.

The process exhausts through a 114 inch diameter stack. A total of 24 traverse points (12 per diameter) will be sampled; the traverse points will be calculated in accordance with EPA Method 1. Sampling will be conducted through four equally spaced ports in the same horizontal plane. With six traverse points sampled per port and each point sampled for 5 minutes, the total sampling time will be 120 minutes.

In accordance with EPA Method 2, velocities and volumetric flow rates of the exhaust gas will be determined using a calibrated S type pitot tube. Positive and negative pitot lines will be leak-checked at the beginning and end of each test run. Gas velocity differential pressures along with stack gas temperatures will be recorded at each sampling point. Static pressure of the exhaust gas stream will be measured with the same pitot tube.

At the beginning and end of each test, gas concentrations of CO_2, O_2, and N_2 (by difference) will be determined with the use of a Bacharach "Fyrite" apparatus as specified by EPA Method 3. Gas concentrations will be used to obtain molecular weight of the process gas.

Percent moisture content, by volume, of the exhaust gas will determined by measuring the weight gain of the four sample train impingers in accordance with EPA Method 4.

As specified by EPA Method 5, each sample train will be assembled as required by the method, leak-checked on site at the beginning and end of each test run, and operated such that isokinetic conditions are maintained. Clean up of the sampling train will include an acetone rinse of the front-half components of the sample train. Front-half acetone rinses will be evaporated to dryness, desiccated, and weighed to a constant weight. Sample train glass fiber filters will be desiccated for 24 hours, and particulate matter weight will be determined gravimetrically. Rinse residue weights and filter weights will be measured to the nearest 0.1 mg. One acetone blank will be prepared in the same manner as the test sample rinses. The blank residue weight will be subtracted from the test sample residue weights. After blank correction, front-half acetone rinse residue weights and sample train filter weights will be used to determine total particulate matter catch. Clean up and analytical procedures will follow the methodology of EPA Method 5.

All visible emissions determinations will be performed in accordance with EPA Stationary Source Sampling Method 9. Visible emission readings will be recorded for the duration of each particulate matter test.

A report summarizing the compliance test program will be submitted within 60 days following completion of field work. The report will describe test methodologies utilized and present a textual and tabular summary of the emissions results and related sampling information. Copies of operational data will be included in the report to verify that all testing was performed during periods of normal plant operation. Also incorporated into the report will be copies of the pre-test calibration results, post-test calibration results, the results of an audit conducted with a critical orifice provided by the Allegheny County Health Department Bureau of Air Pollution Control, field data sheets for the particulate matter sampling and visible emissions determinations, computer-generated emissions calculations, and analytical results for each test.

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

APPENDIX B

OPERATIONAL DATA

KEYSTONE
ENVIRONMENTAL RESOURCES, INC.

CC-10295 REV. 1161
03.001.0020

UNITED STATES STEEL CORPORATION
CLAIRTON COKE AND COAL CHEMICAL WORKS

PUSHING AND CHARGING REPORT

UNIT NO. 3

12 Hrs. Beginning 12:00 P.M.

Date 10-08-92

BATTERY NO. A-9					
OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1					
3					
5					
7					
9					
11					
13					
15					
17					
19					
21					
23					
25					
27					
29					
31					
2	2	52	3	13	
4	3	03	3	22	
6	3	14	3	30	
8	3	25	3	39	
10	3	36	3	50	
12	3	49	4	04	
14	4	02	4	10	
16	4	08	4	28	
18	4	26	4	40	
20	4	38	4	52	
22	4	50	5	00	
24	5	02	5	16	
26	5	14	5	28	
28	5	26	5	40	
30	5	38	6	04	
1					
2					

BATTERY NO. B-9					
OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1	6	02	6	12	
3	6	10	6	22	
5	6	20	6	28	
7	6	30	6	44	
9	6	42	6	56	
11	6	54	7	08	
13	7	06	7	20	
15	7	18	7	28	
17	7	30	7	40	
19	7	42	7	56	
21	7	54	8	04	
23	8	06	8	12	
25	8	18	8	23	
27	8	30	8	35	
29	8	42	8	47	
31	8	53	8	58	
2					
4					
6					
8					
10					
12					
14					
16					
18					
20					
22					
24					
26					
28					
30					
1					
C2	9	06	9	14	

BATTERY NO. A-8					
OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1					
3			12	15	
5	12	11	12	25	
7	12	22	12	35	
9	12	33	12	58	
11	12	45	1	08	
13	1	05	1	17	
15	1	19	1	28	
17	1	30	1	38	
19	1	40	1	48	
21	1	50	1	59	
23	2	01	2	10	
25	2	12	2	20	
27	2	22	2	29	
29	2	32	2	42	
31	2	40	2	59	
2	9	12	9	26	
4	9	24	9	34	
6	9	36	9	46	
8	9	48	9	58	
10	10	00	10	14	
12	10	12	10	22	
14	10	24	10	34	
16	10	36	10	46	
18	10	48	11	10	
20	11	00	11	22	
22	11	12	11	34	
24	11	24	11	46	
26	11	36	-	-	
28	11	48	-	-	
30					
1					
2					

REMARKS:

15 / 15 17 / 17 28 / 27

Condition of Signals

Condition of Pusher

HOURLY REPORT OF OPERATION

TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED	TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED
12-1	4	4		6-7	6	6	
1-2	5	6		7-8	5	5	
2-3	6	5		8-9	5	6	
3-4	5	5		9-10	5	5	
4-5	5	5		10-11	5	4	
5-6	4	4		11-12	5	4	
	29	29			34	30	

Total Ovens Pushed 60

Total Ovens Charged 59

Pusherman

Battery Foreman

CC-10295 REV. 1161
03.001.0020

UNITED STATES STEEL CORPORATION
CLAIRTON COKE AND COAL CHEMICAL WORKS

PUSHING AND CHARGING REPORT

UNIT NO. 3
12 Hrs. Beginning 12:00 AM
Date 10-8-92

BATTERY NO. A59

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1	4	43	4	55	
3	4	57	5	05	
5	5	09	5	25	
7	5	27	5	31	
9	5	33	5	55	
11	5	57	6	09	
13	6	09	6	19	
15	6	21	6	30	
17	6	32	6	41	
19	6	43	6	52	
21	6	54	7	02	
23	7	04	7	12	
25	7	14	7	22	
27	7	24	7	32	
29	7	34	7	42	
31	7	44	7	56	
2					
4					
6					
8					
10					
12					
14					
16					
18					
20					
22					
24					
26					
28					
30					
1					
2					

BATTERY NO. B59

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1					
3					
5					
7					
9					
11					
13					
15					
17			12	09	
19	12	11	12	35	
21	12	39	12	48	
23	12	50	12	54	
25	12	56	1	09	
27	1	06	1	14	
29	1	16	1	24	
31	1	26	1	35	
2	7	58	8	20	
4	8	45	8	55	
6	8	57	9	07	
8	9	08	9	24	
10	9	19	9	35	
12	9	31	9	44	
14	9	43	9	53	
16	9	55	10	08	
18	10	06	10	16	
20	10	17	10	30	
22	10	28	10	40	
24	10	38	10	50	
26	10	48	11	00	
28	10	59	11	13	
30	11	12	11	27	
C-1	11	17	11	40	
C 2	1	37	1	42	

BATTERY NO. A58

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1	11	30	11	59	✓
3	11	49			
5					
7					
9					
11					
13					
15					
17					
19					
21					
23					
25					
27					
29					
31					
2	1	44	2	--	
4	2	02	2	06	
6	2	08	2	11	
8	2	13	2	17	
10	2	19	2	33	
12	2	54	3	03	
14	3	05	3	14	
16	3	16	3	24	
18	3	26	3	35	
20	3	37	3	46	
22	3	48	3	58	
24	4	--	4	09	
26	4	17	4	20	
28	4	22	4	30	
30	4	32	4	41	
1					
2					

REMARKS: A-1/8 New-Door

Condition of Signals: 11/16

Condition of Pusher: 11/16

HOURLY REPORT OF OPERATION

TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED	TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED
12-1	4	4		6-7	5	5	
1-2	5	5		7-8	6	6	
2-3	5	5		8-9	2	2	
3-4	5	6		9-10	5	5	
4-5	6	5		10-11	6	5	
5-6	4	4		11-12	4	5	
	29	29			28	28	

Total Ovens Pushed 59
Total Ovens Charged 59

Pusherman

Battery Foreman D. Sandm

CC-10295 REV. 1181
03.001.0020

UNITED STATES STEEL CORPORATION
CLAIRTON COKE AND COAL CHEMICAL WORKS

PUSHING AND CHARGING REPORT

UNIT NO. 3
12 Hrs. Beginning 12:00 P M
Date 10-9-92

BATTERY NO. A59

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1	7	24	7	46	
3	7	36	7	58	
5	7	48	8	10	
7	8	00	8	22	
9	8	12	8	34	
11	8	24	8	46	
13	8	36	8	58	
15	8	48	9	10	
17	9	00	9	22	
19	9	12	9	34	
21	9	24	9	46	
23	9	36	9	58	
25	9	48	10	10	
27	10	00	10	22	
29	10	12	10	40	
31	10	24	10	52	
2					
4					
6					
8					
10					
12					
14					
16					
18					
20			12	04	
22			12	16	
24	12	06	12	28	
26	12	18	12	41	
28	12	30	1	00	
30	12	43	1	11	
1					
2					

BATTERY NO. B59

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1	1	02	1	24	
3	1	13	1	36	
5	1	26	1	48	
7	1	38	2	01	
9	1	50	2	13	
11	2	03	2	25	
13	2	15	2	37	
15	2	27	2	50	
17	2	39	3	02	
19	2	52	3	14	
21	3	04	3	27	
23	3	16	3	39	
25	3	29	3	51	
27	3	41	4	04	
29	3	53	4	16	
31	4	06	4	29	
2	10	42	11	04	
4	10	54	11	16	
6	11	06	11	28	
8	11	18	11	40	
10	11	30	11	52	
12	11	42	—		
14	11	52	—		
16					
18					
20					
22					
24					
26					
28					
30					
1					
C2	4	18	4	34	

BATTERY NO. A58

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1					
3					
5					
7					
9					
11					
13					
15					
17					
19					
21					
23					
25					
27					
29					
31					
2	4	24	4	46	
4	4	36	4	58	
6	4	48	5	10	
8	5	00	5	22	
10	5	12	5	34	
12	5	24	5	46	
14	5	36	5	58	
16	5	48	6	10	
18	6	00	6	22	
20	6	12	6	34	
22	6	24	6	46	
24	6	36	6	58	
26	6	48	7	10	
28	7	00	7	22	
30	7	12	7	34	
1					
2					

REMARKS:

20 / 22 24 / 22 15 / 15

Condition of Signals

Condition of Pusher

HOURLY REPORT OF OPERATION

TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED	TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED
12-1	4	4		6-7	5	5	
1-2	5	5		7-8	5	5	
2-3	5	5		8-9	5	5	
3-4	5	5		9-10	5	5	
4-5	5	6		10-11	5	4	
5-6	5	5		11-12	5	5	
	29	30			30	29	

Total Ovens Pushed 59
Total Ovens Charged 59

Pusherman
Battery Foreman D. Sanders

** TOTAL PAGE.004 **

CC-10295 REV. 1181
03.001.0020

UNITED STATES STEEL CORPORATION
CLAIRTON COKE AND COAL CHEMICAL WORKS

PUSHING AND CHARGING REPORT

UNIT NO. 3

12 Hrs. Beginning 12:00 A M

Date 10-9-92

BATTERY NO. A-9

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1	12	18	12	38	
3	12	30	1	06	
5	12	40	1	31	
7	1	08	1	42	
9	1	33	1	52	
11	1	44	2	02	
13	1	54	2	12	
15	2	04	2	23	
17	2	14	2	34	
19	2	25	2	45	
21	2	36	2	58	
23	2	47	3	10	
25	3	--	3	21	
27	3	12	3	32	
29	3	23	3	45	
31	3	33	3	56	
2	9	50	10	13	
4	10	03	10	27	
6	10	15	10	38	
8	10	27	10	50	
10	10	40	11	02	
12	10	52	11	14	
14	11	04	11	27	
16	11	16	11	39	
18	11	29	11	51	
20	11	41			
22	11	53			
24					
26					
28					
30					
1					
2					

BATTERY NO. B-9

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1					
3					
5					
7					
9					
11					
13					
15					
17					
19					
21					
23					
25					
27					
29					
31					
2	3	47	4	06	
4	3	58	4	16	
6	4	08	4	26	
8	4	18	4	36	
10	4	28	4	46	
12	4	38	4	58	
14	4	48	5	10	
16	5	--	5	22	
18	5	12	5	34	
20	5	24	5	46	
22	5	36	5	56	
24	5	48	6	10	
26	6	--	6	22	
28	6	12	6	28	
30	6	24	6	40	
C1	6	30	6	52	
2					

BATTERY NO. A-8

OVEN NO.	TIME PUSHED		TIME CHARGED		NOTES
1	6	42	7	04	
3	6	54	7	16	
5	7	06	7	28	
7	7	18	7	40	
9	7	30	7	52	
11	7	42	8	04	
13	7	54	8	16	
15	8	06	8	28	
17	8	18	8	40	
19	8	30	8	53	
21	8	42	9	05	
23	8	55	9	18	
25	9	07	9	30	
27	9	20	9	42	
29	9	32	9	48	
31	9	44	10	01	
2					
4					
6					
8					
10					
12					
14					
16					
18					
20					
22					
24					
26			12	06	
28			12	16	
30	12	08	12	28	
1					
2					

REMARKS: 27/25 16/16 17/19

Condition of Signals

Condition of Pusher

HOURLY REPORT OF OPERATION

TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED	TIME	OVENS PUSHED	OVENS CHARGED	OVENS SCHEDULED
12-1	4	4		6-7	6	5	
1-2	4	4		7-8	5	5	
2-3	5	6		8-9	5	5	
3-4	6	5		9-10	5	5	
4-5	5	5		10-11	5	5	
5-6	5	5		11-12	5	5	
	29	29			31	31	

Total Ovens Pushed 60

Total Ovens Charged 60

Pusherman

Battery Foreman

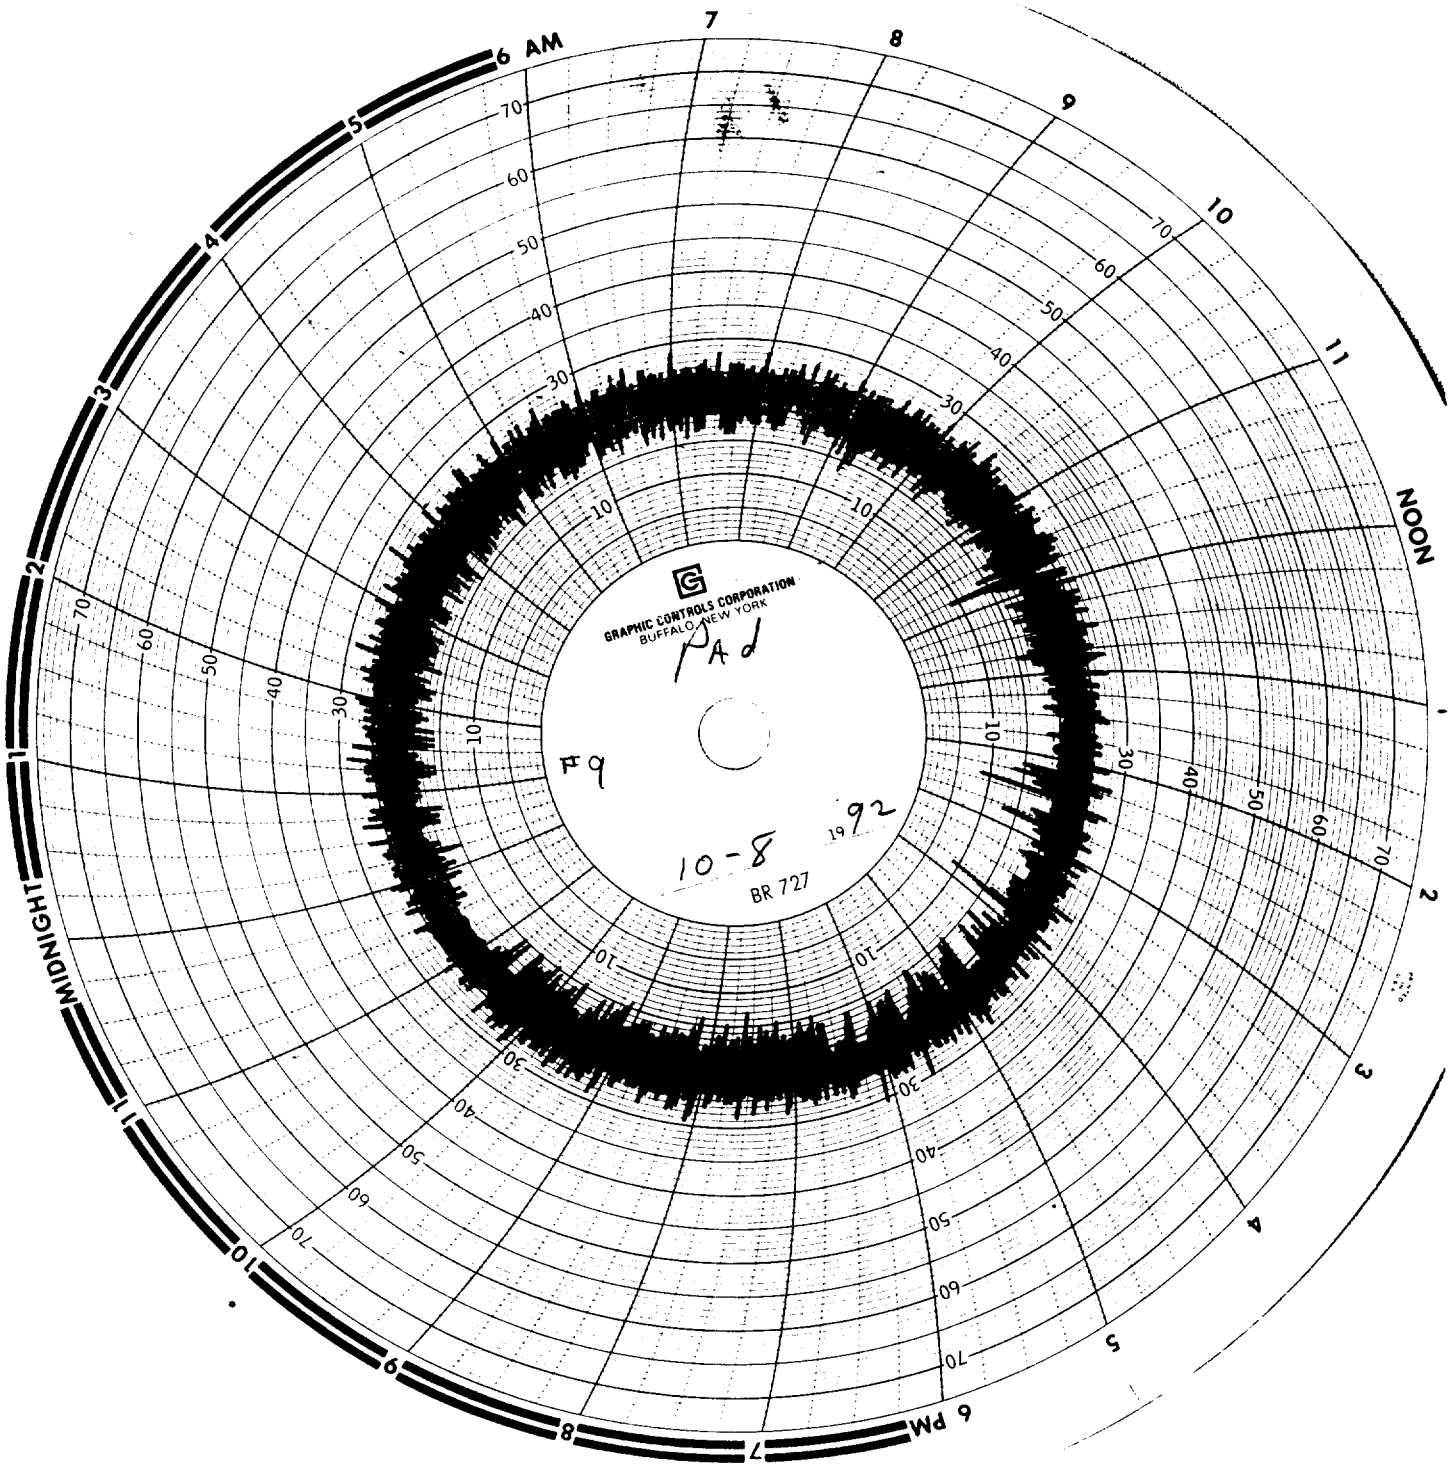
GRAPHIC CONTROLS CORPORATION
BUFFALO, NEW YORK
Pad
Fq
10-8
1992
BR 727
MIDNIGHT
6 AM
NOON
6 PM

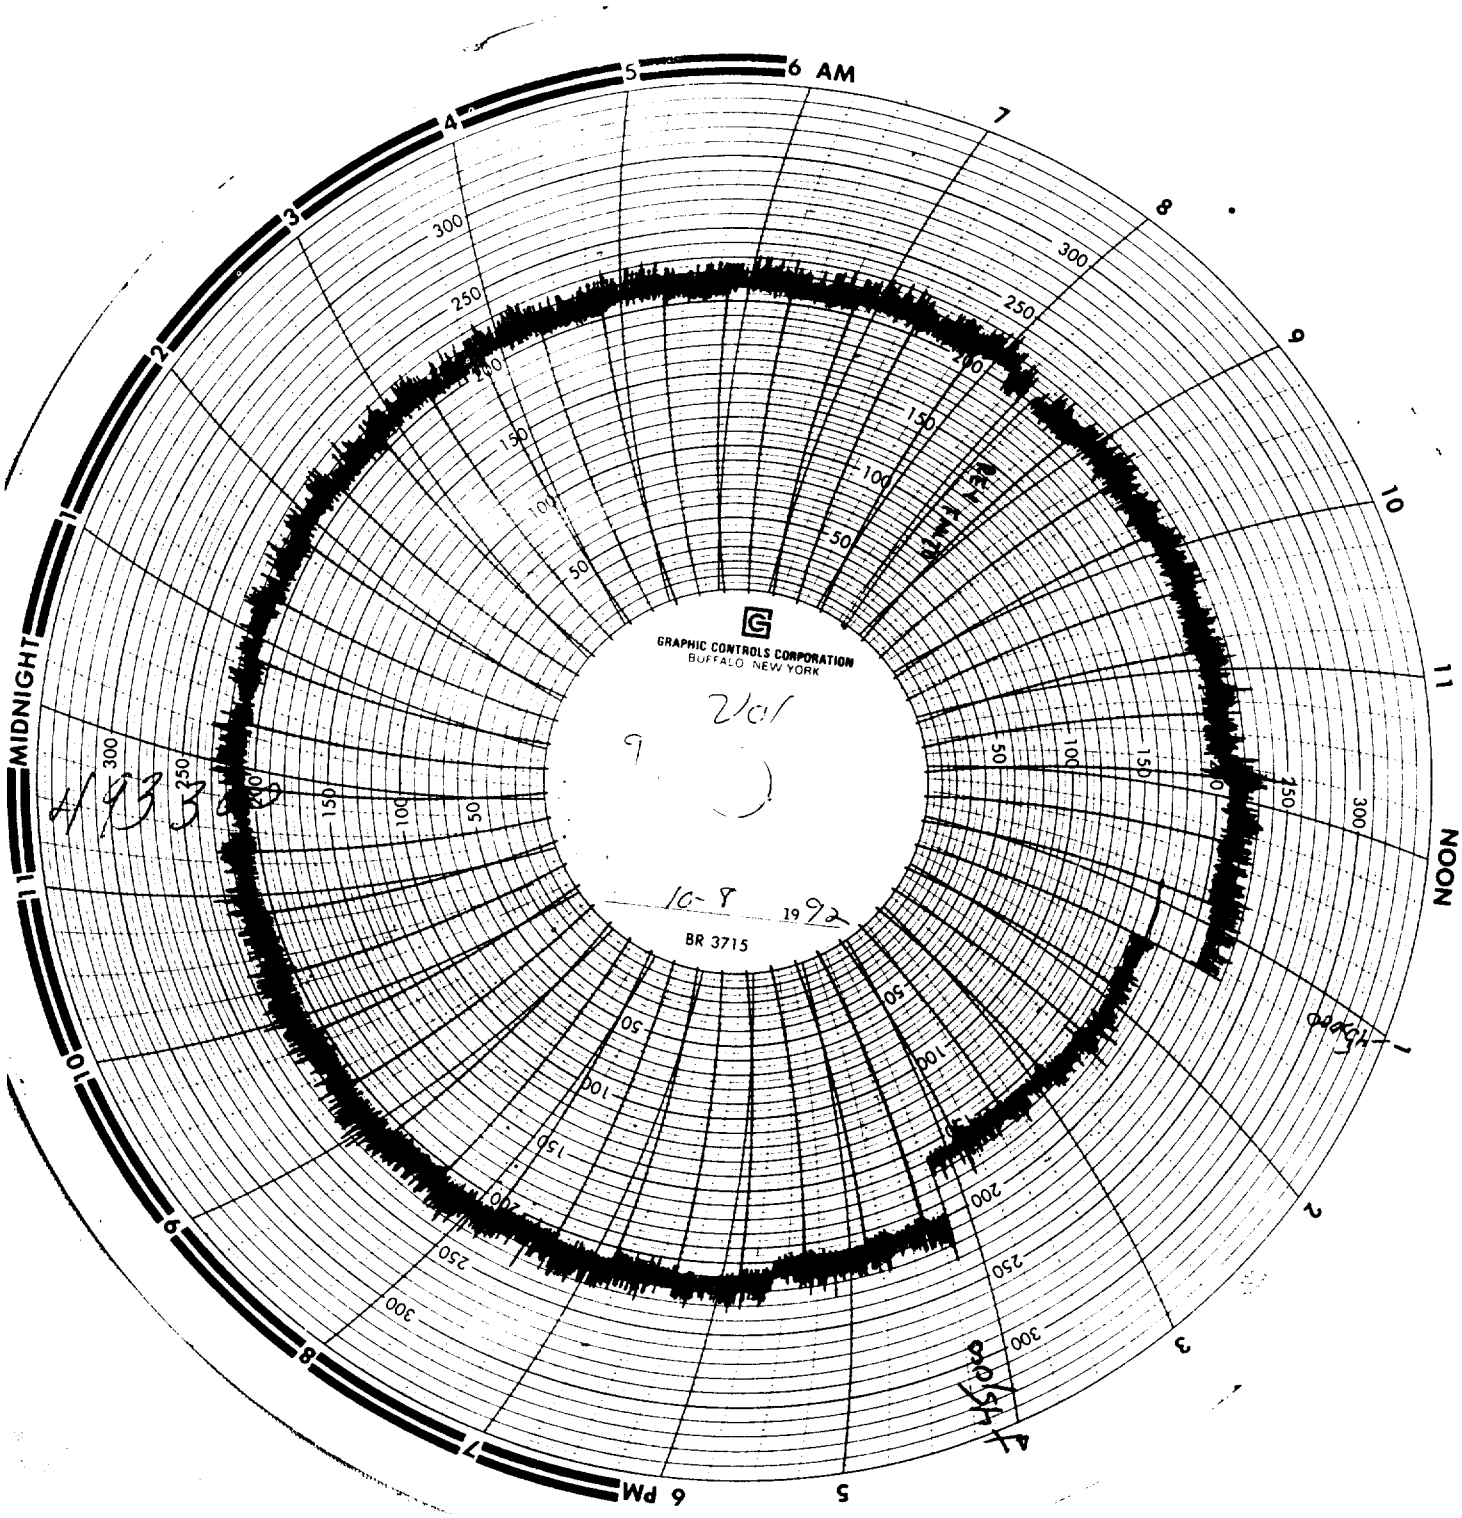
6 AM
7
8
9
10
11
NOON
1
2
3
4
5
6 PM
7
8
9
10
11
MIDNIGHT
GRAPHIC CONTROLS CORPORATION
BUFFALO NEW YORK
Vol
9
10-8 1992
BR 3715
REV FAN
4/93300

NOON
6 PM
MIDNIGHT
6 AM
1
2
3
4
5
6
7
8
9
10
11

MIDNIGHT
6 AM
NOON
6 PM
GRAPHIC CONTROLS CORPORATION
BR 55005

MIDNIGHT
AM
NOON
6 PM
GRAPHIC CONTROLS CORPORATION
BUFFALO NEW YORK
BR 727
#9
Pad
10-9
1962

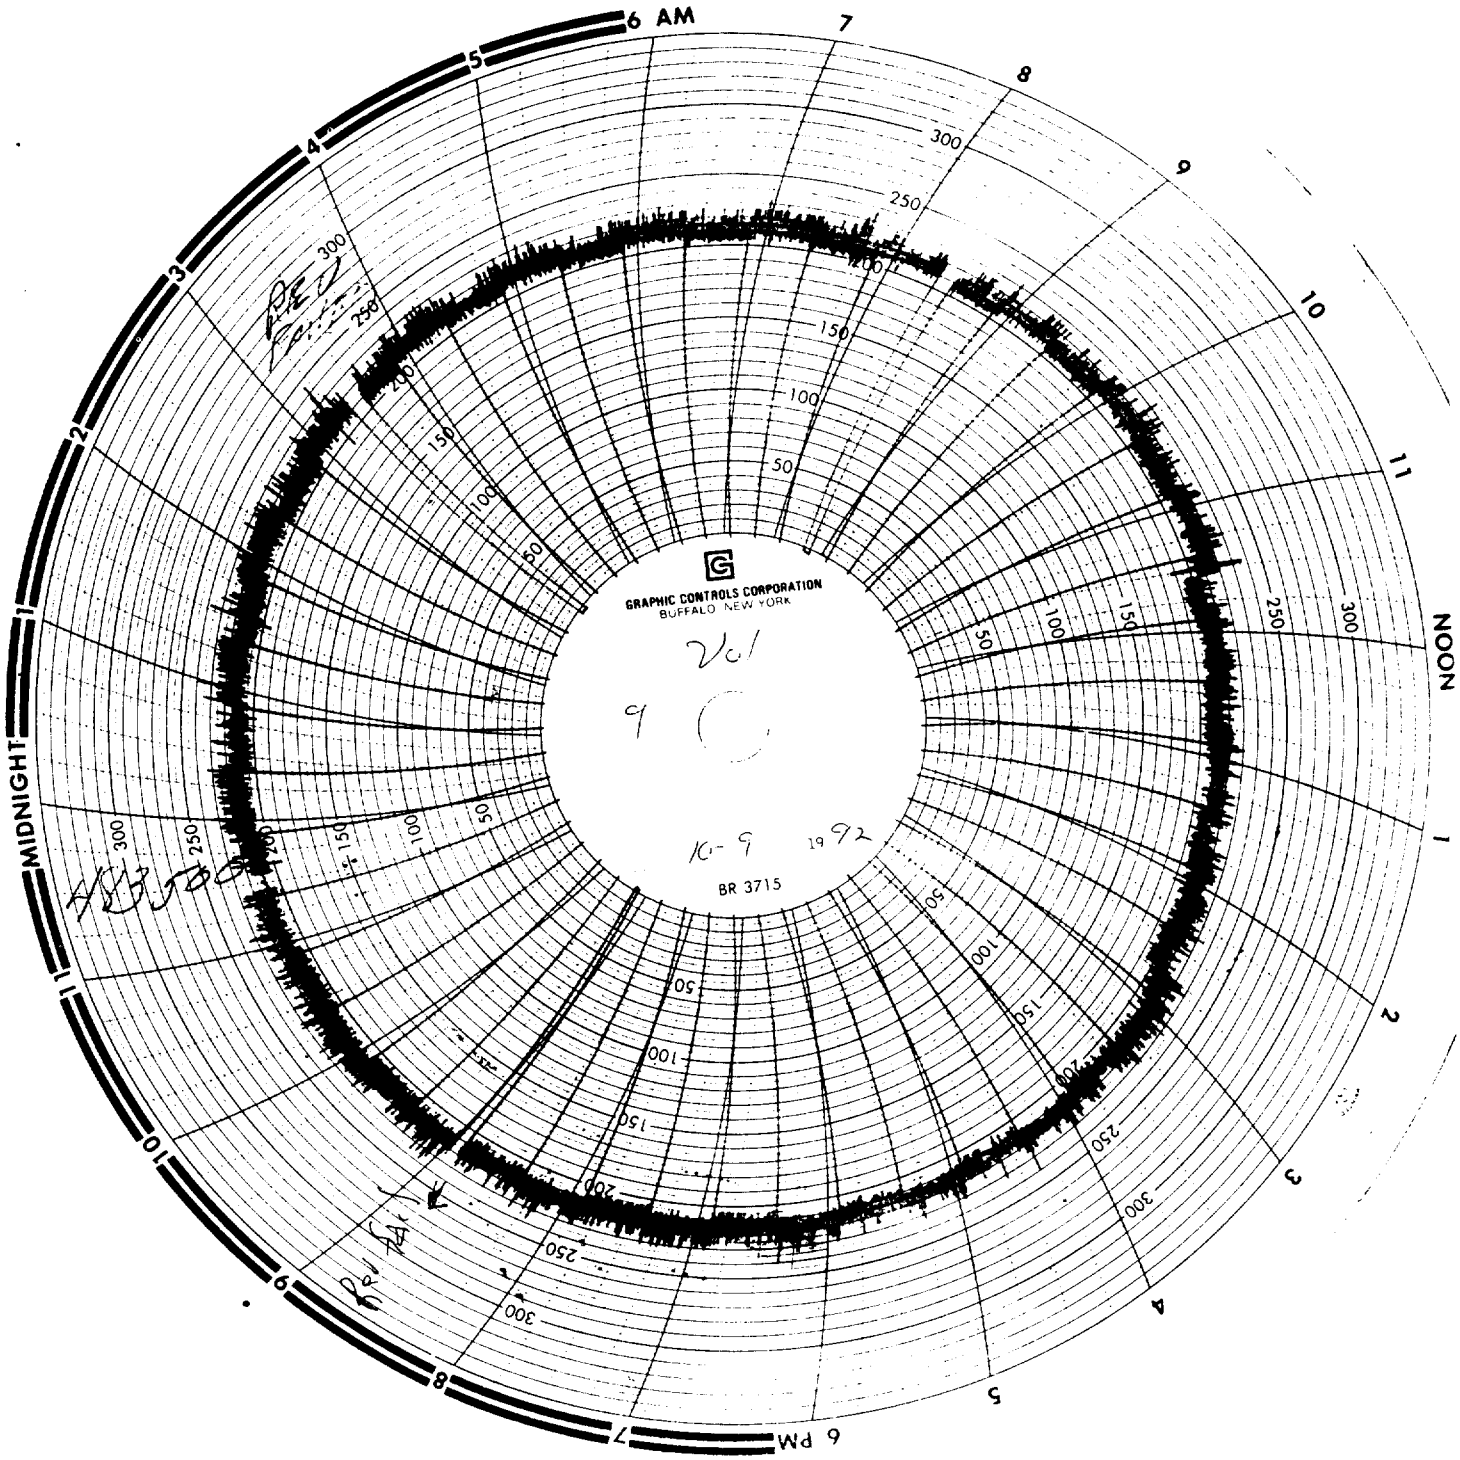
6 AM
7
8
9
10
11
NOON
1
2
3
4
5
6 PM
7
8
9
10
11
MIDNIGHT
1
2
3
4
5
6
GRAPHIC CONTROLS CORPORATION
BUFFALO NEW YORK
Vol
10-9 1992
BR 3715

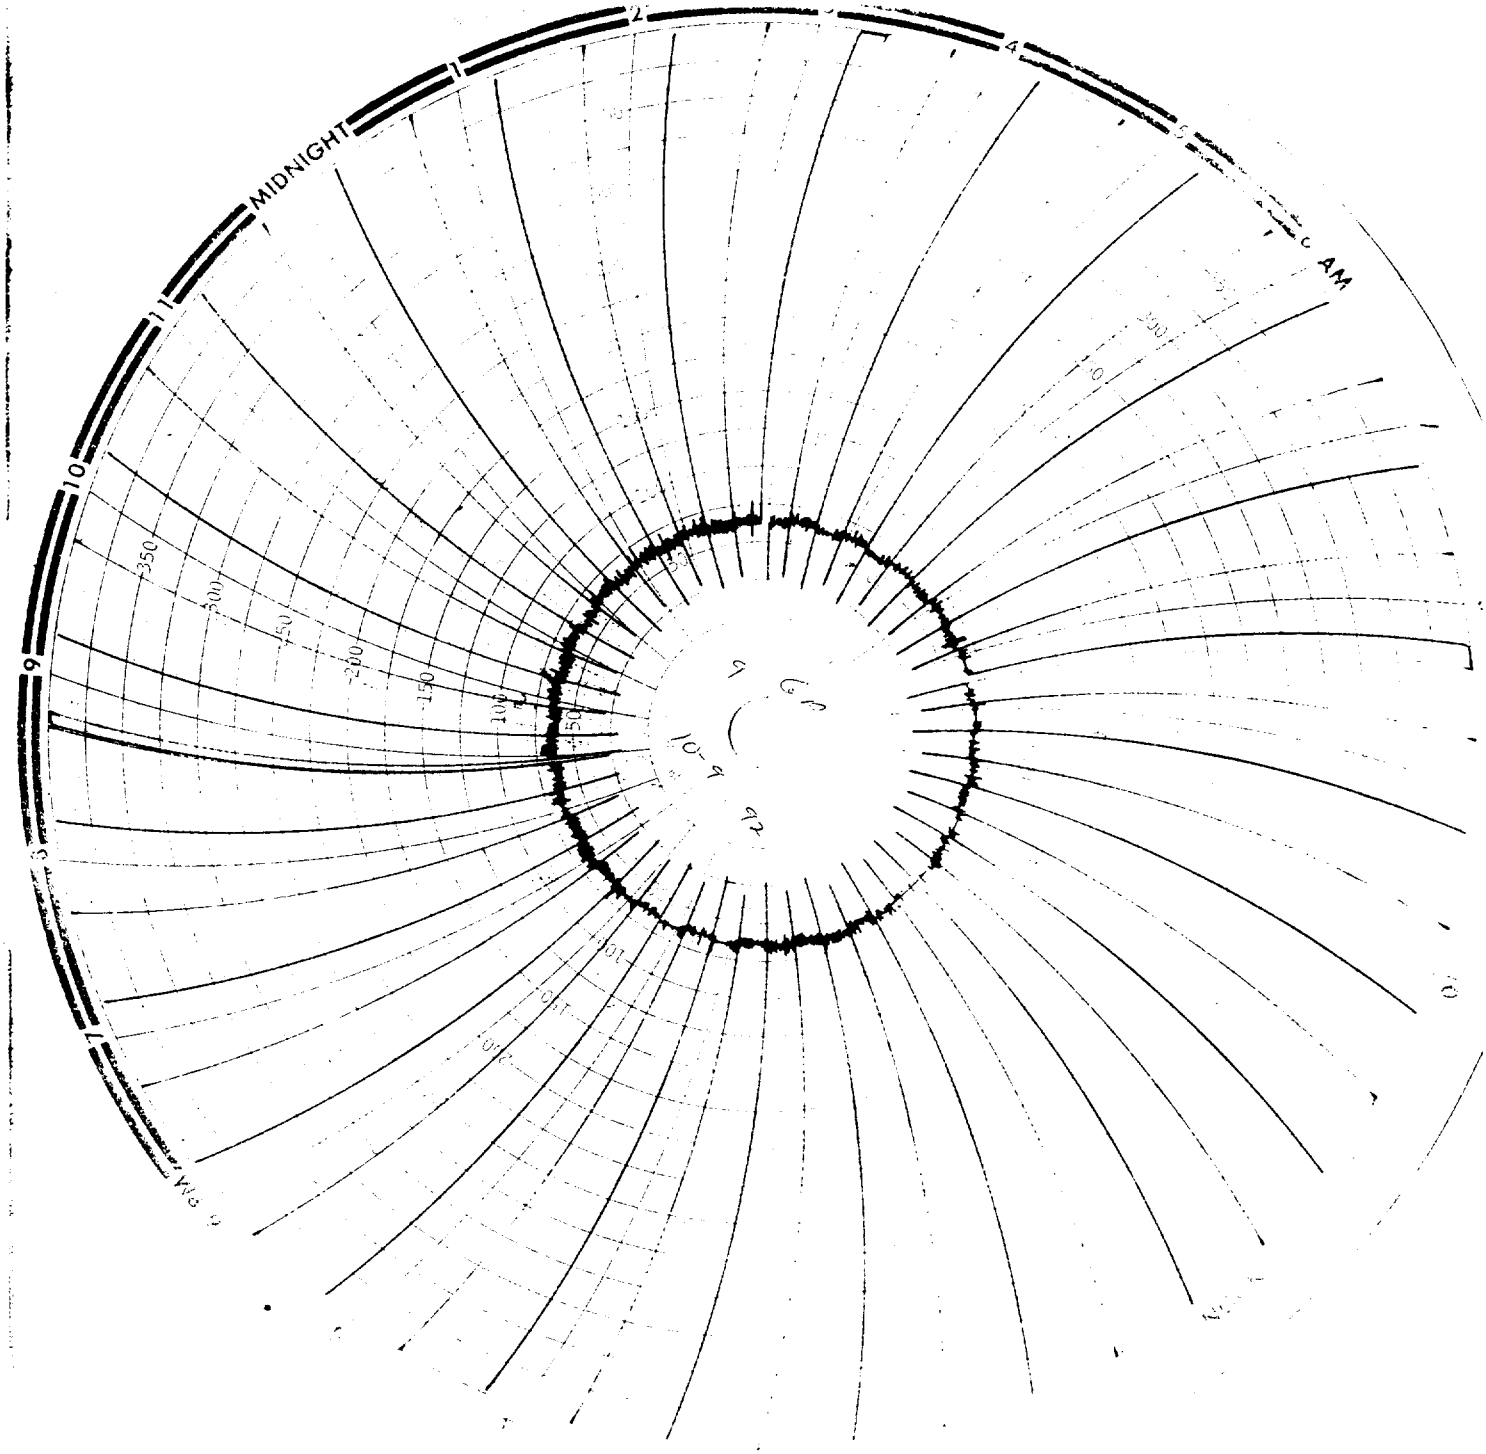
MIDNIGHT
AM
350
300
250
200
150
100
50
10-9
92

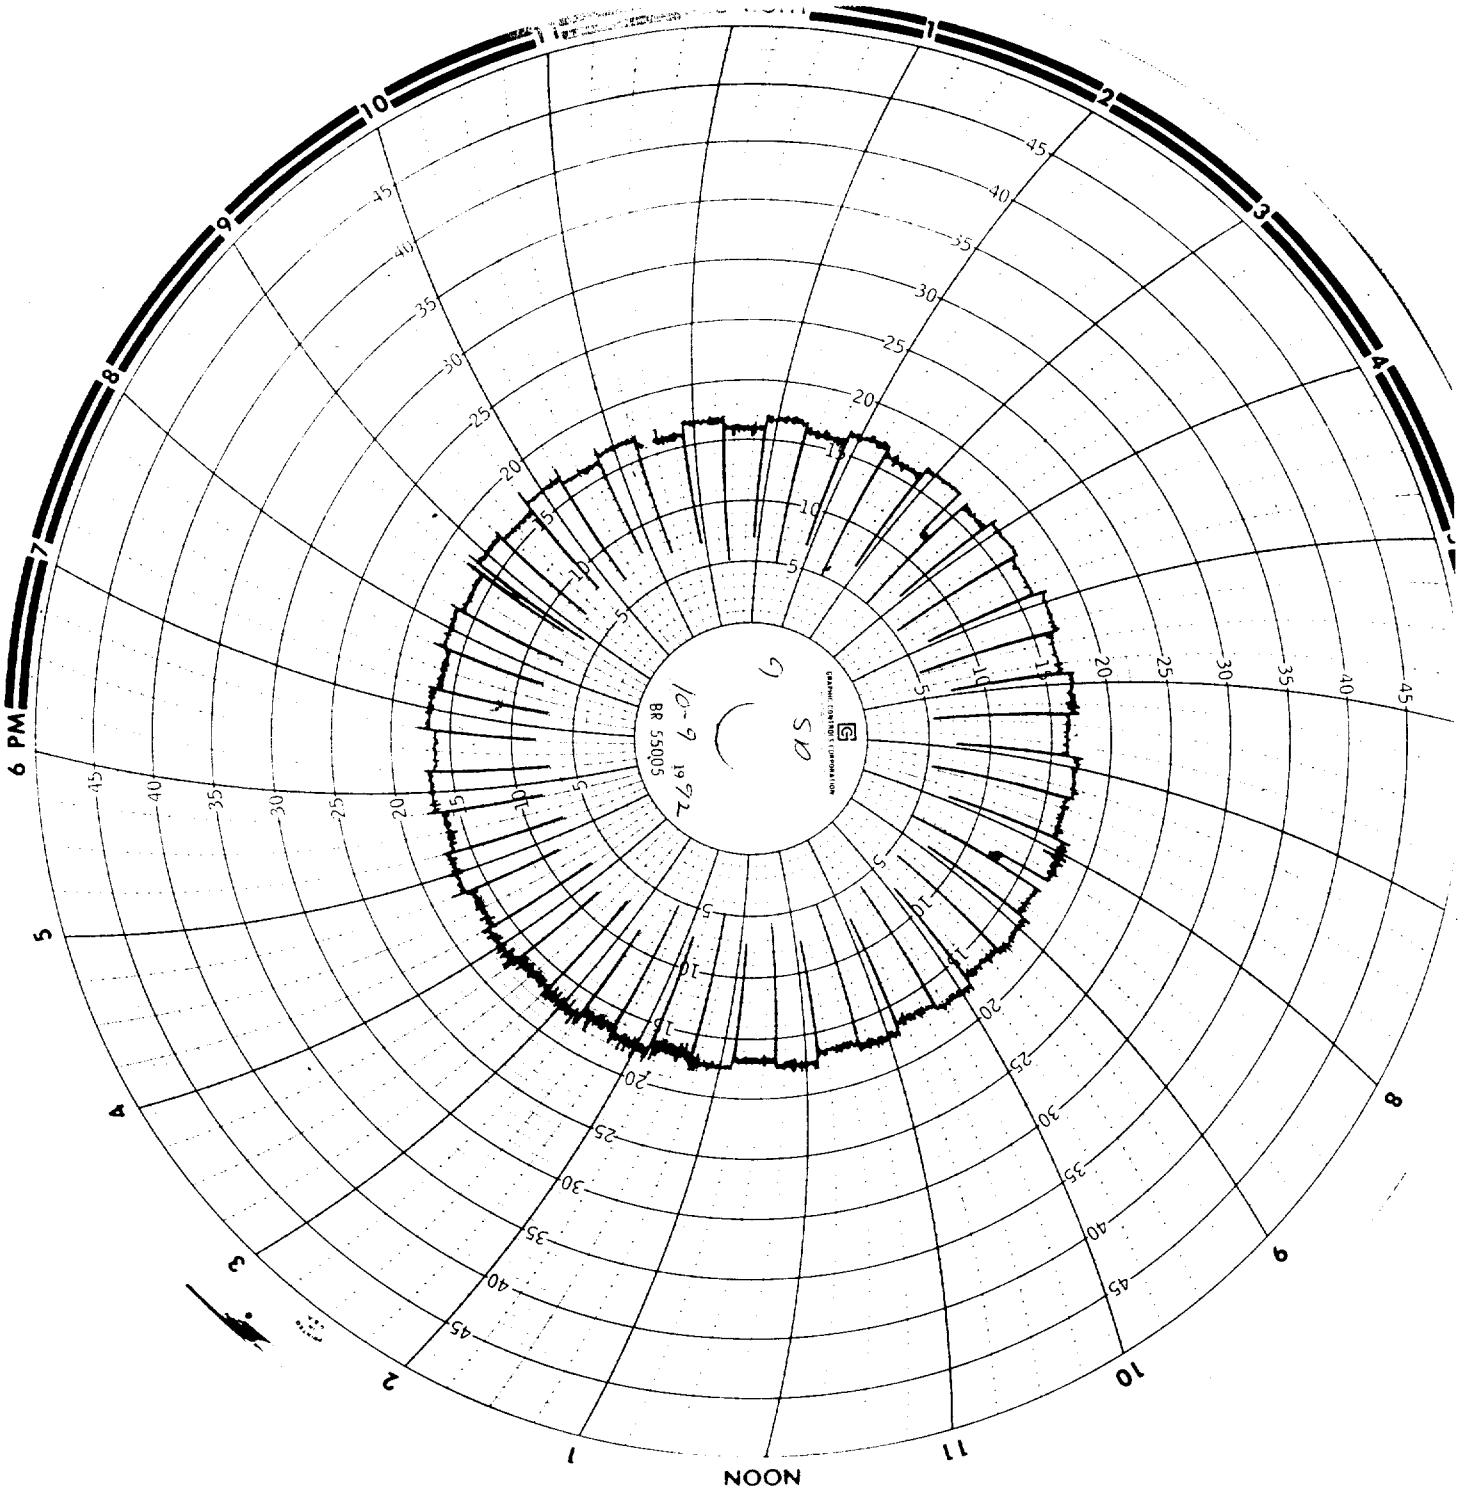
6 PM
NOON
GRAPHIC CONTROLS CORPORATION
BR 55005
10-9 1972
SD

P U S H I N G S C H E D U L E

Thursday, October 8. 1992 Turn 3
Batteries: 7-9_2

Seq #	Oven	Last Pushed	Earliest	Desired	Latest
1	A14/9	0:31	3:50pm	4:06pm	4:10pm
2	B14/8	0:31	3:56pm	4:06pm	4:16pm
3	A16/9	0:31	4:02pm	4:12pm	4:22pm
4	B16/8	0:31	4:08pm	4:18pm	4:28pm
5	A18/9	0:31	4:14pm	4:24pm	4:34pm
6	B18/8	16:46	4:20pm	4:30pm	4:40pm
7	A20/9	19:42	4:26pm	4:36pm	4:46pm
8	B20/8	19:42	4:32pm	4:42pm	4:52pm
9	A22/9	19:42	4:38pm	4:48pm	4:58pm
10	B22/8	19:42	4:44pm	4:54pm	5:04pm
11	A24/9	19:42	4:50pm	5:00pm	5:10pm
12	B24/8	19:42	4:56pm	5:06pm	5:16pm
13	A26/9	19:42	5:02pm	5:12pm	5:22pm
14	B26/8	19:42	5:08pm	5:18pm	5:28pm
15	A28/9	19:42	5:14pm	5:24pm	5:34pm
16	B28/8	19:42	5:20pm	5:30pm	5:40pm
17	A30/9	19:42	5:26pm	5:36pm	5:46pm
18	B30/8	19:42	5:32pm	5:42pm	5:52pm
19	C1 /8	19:42	5:38pm	5:48pm	5:58pm
20	D1 /9	19:42	5:44pm	5:54pm	6:04pm
21	A1 /7	19:42	5:50pm	6:00pm	6:10pm
22	B3 /9	19:42	5:56pm	6:06pm	6:16pm
23	A3 /7	19:42	6:02pm	6:12pm	6:22pm
24	B5 /9	19:42	6:08pm	6:18pm	6:28pm
25	A5 /7	19:42	6:14pm	6:24pm	6:34pm
26	B7 /9	19:42	6:20pm	6:30pm	6:40pm
27	A7 /7	19:42	6:26pm	6:36pm	6:46pm
28	B9 /9	19:42	6:32pm	6:42pm	6:52pm
29	A9 /7	19:42	6:38pm	6:48pm	6:58pm
30	B11/9	19:42	6:44pm	6:54pm	7:04pm
31	A11/7	19:42	6:50pm	7:00pm	7:10pm
32	B13/9	19:42	6:56pm	7:06pm	7:16pm
33	A13/7	19:42	7:02pm	7:12pm	7:22pm
34	B15/9	19:42	7:08pm	7:18pm	7:28pm
35	A15/7	19:42	7:14pm	7:24pm	7:34pm
36	B17/9	19:42	7:20pm	7:30pm	7:40pm
37	A17/7	19:42	7:26pm	7:36pm	7:46pm
38	B19/9	19:42	7:32pm	7:42pm	7:52pm
39	A19/7	19:42	7:38pm	7:48pm	7:58pm
40	B21/9	19:36	7:44pm	7:54pm	8:04pm
41	A21/7	19:36	7:50pm	8:00pm	8:10pm
42	B23/9	19:36	7:56pm	8:06pm	8:16pm
43	A23/7	19:36	8:02pm	8:12pm	8:22pm
44	B25/9	19:36	8:08pm	8:18pm	8:28pm
45	A25/7	19:36	8:14pm	8:24pm	8:34pm
46	B27/9	19:36	8:20pm	8:30pm	8:40pm
47	A27/7	19:36	8:26pm	8:36pm	8:46pm
48	B29/9	19:36	8:32pm	8:42pm	8:52pm
49	A29/7	19:36	8:38pm	8:48pm	8:58pm
50	B31/9	19:36	8:44pm	8:54pm	9:04pm
51	A31/7	19:36	8:50pm	9:00pm	9:10pm
52	C2 /9	19:36	8:56pm	9:06pm	9:16pm
53	A2 /8	19:36	9:02pm	9:12pm	9:22pm
54	E2 /7	19:36	9:08pm	9:18pm	9:28pm
55	A4 /8	19:36	9:14pm	9:24pm	9:34pm
56	B4 /7	19:36	9:20pm	9:30pm	9:40pm
57	A6 /8	19:36	9:26pm	9:36pm	9:46pm
58	B6 /7	19:36	9:32pm	9:42pm	9:52pm
59	A8 /8	19:36	9:38pm	9:48pm	9:58pm
60	B8 /7	19:36	9:44pm	9:54pm	10:04pm
61	A10/8	19:36	9:50pm	10:00pm	10:10pm
62	B10/7	19:36	9:56pm	10:06pm	10:16pm
63	A12/8	19:36	10:02pm	10:12pm	10:22pm
64	B12/7	19:36	10:08pm	10:18pm	10:28pm
65	A14/8	19:36	10:14pm	10:24pm	10:34pm
66	B14/7	19:36	10:20pm	10:30pm	10:40pm
67	A16/8	19:36	10:26pm	10:36pm	10:46pm
68	B16/7	19:36	10:32pm	10:42pm	10:52pm
69	A18/8	19:36	10:38pm	10:48pm	10:58pm
70	B18/7	19:36	10:44pm	10:54pm	11:04pm
71	A20/8	19:36	10:50pm	11:00pm	11:10pm
72	B20/7	19:36	10:56pm	11:06pm	11:16pm
73	A22/8	19:36	11:02pm	11:12pm	11:22pm
74	B22/7	19:36	11:08pm	11:18pm	11:28pm
75	A24/8	19:36	11:14pm	11:24pm	11:34pm
76	B24/7	19:36	11:20pm	11:30pm	11:40pm
77	A26/8	19:36	11:26pm	11:36pm	11:46pm
78	B26/7	19:36	11:32pm	11:42pm	11:52pm
79	A28/8	19:36	11:38pm	11:48pm	11:58pm
80	C2 /7	19:36	11:44pm	11:54pm	12:04am

P U S H I N G S C H E D U L E

Thursday, October 8, 1992 Turn 2
Batteries: 7-9_2

Seq #	Oven	Last Pushed	Earliest	Desired	Lates
1	A2 /7	19:05	7:50am	8:00am	8:25a
2	B4 /9	19:05	7:57am	8:06am	8:31a
3	A4 /7	19:05	8:03am	8:12am	8:37a
4	B6 /9	19:05	8:09am	8:18am	8:43a
5	A6 /7	19:05	8:14am	8:24am	8:49a
6	B8 /9	19:04	8:20am	8:30am	8:55a
7	A8 /7	19:04	8:26am	8:36am	9:01a
8	B10/9	19:05	8:33am	8:43am	9:08a
9	A10/7	19:05	8:39am	8:49am	9:14a
10	B12/9	19:05	8:45am	8:55am	9:20a
11	A12/7	19:05	8:51am	9:01am	9:26a
12	B14/9	19:04	8:57am	9:07am	9:32a
13	A14/7	19:04	9:03am	9:13am	9:38a
14	B16/9	19:05	9:10am	9:20am	9:45a
15	A16/7	19:05	9:16am	9:26am	9:51a
16	B18/9	19:05	9:22am	9:32am	9:57a
17	A18/7	19:05	9:28am	9:38am	10:03a
18	B20/9	19:05	9:34am	9:44am	10:07a
19	A20/7	19:04	9:40am	9:50am	10:15a
20	B22/9	19:04	9:46am	9:56am	10:21a
21	A22/7	19:05	9:53am	10:03am	10:28a
22	B24/9	19:05	9:59am	10:09am	10:34a
23	A24/7	19:05	10:05am	10:15am	10:40a
24	B26/9	19:05	10:11am	10:21am	10:46a
25	A26/7	19:04	10:17am	10:27am	10:52a
26	B28/9	19:04	10:23am	10:33am	10:58a
27	A28/7	19:05	10:30am	10:40am	11:05a
28	B30/9	19:05	10:36am	10:46am	11:11a
29	B1 /9	19:05	10:42am	10:52am	11:17a
30	A30/7	19:05	10:48am	10:58am	11:23a
31	A1 /8	19:04	10:54am	11:04am	11:29a
32	B3 /9	19:04	11:00am	11:10am	11:35a
33	A3 /7	19:04	11:06am	11:16am	11:41a
34	B5 /9	19:05	11:13am	11:23am	11:48a
35	A5 /7	19:05	11:19am	11:29am	11:54a
36	B7 /9	19:05	11:25am	11:35am	12:00p
37	A7 /7	19:05	11:31am	11:41am	12:06p
38	B9 /9	19:05	11:37am	11:47am	12:12p
39	A9 /7	19:05	11:43am	11:53am	12:19p
40	B9 /7	19:06	11:50am	12:00pm	12:25p
41	A11/8	19:06	11:56am	12:06pm	12:31p
42	B11/7	19:06	12:02pm	12:12pm	12:37p
43	A13/8	19:06	12:08pm	12:18pm	12:43p
44	B13/7	19:06	12:14pm	12:24pm	12:49p
45	A15/8	19:06	12:20pm	12:30pm	12:55p
46	B15/7	19:06	12:26pm	12:36pm	1:01p
47	A17/8	19:07	12:33pm	12:43pm	1:08p
48	B17/7	19:07	12:39pm	12:49pm	1:14p
49	A19/8	19:07	12:45pm	12:55pm	1:20p
50	B19/7	19:07	12:51pm	1:01pm	1:26p
51	A21/8	19:07	12:57pm	1:07pm	1:32p
52	B21/7	19:07	1:03pm	1:13pm	1:38p
53	A23/8	19:07	1:09pm	1:19pm	1:44p
54	B23/7	19:08	1:16pm	1:26pm	1:51p
55	A25/8	19:08	1:22pm	1:32pm	1:57p
56	B25/7	19:08	1:28pm	1:38pm	2:03p
57	A27/8	19:08	1:34pm	1:44pm	2:09p
58	B27/7	19:08	1:40pm	1:50pm	2:15p
59	A29/9	17:08	1:46pm	1:56pm	2:21p
60	B29/7	19:09	1:53pm	2:03pm	2:28p
61	A31/8	19:09	1:59pm	2:09pm	2:34p
62	A5 /8	19:09	2:05pm	2:15pm	2:40p
63	B3 /8	19:09	2:11pm	2:21pm	2:46p
64	A3 /8	19:09	2:17pm	2:27pm	2:52p
65	B1 /8	19:09	2:23pm	2:33pm	2:58p
66	A6 /8	19:07	2:29pm	2:39pm	3:04p
67	B8 /8	19:10	2:36pm	2:46pm	3:11p
68	A8 /8	19:10	2:42pm	2:52pm	3:17p
69	B8 /8	19:10	2:48pm	2:58pm	3:23p
70	A10/8	19:10	2:54pm	3:04pm	3:29p
71	B10/8	19:10	3:00pm	3:10pm	3:35p
72	B11/8	19:11	3:06pm	3:16pm	3:41p
73	A12/8	19:11	3:13pm	3:23pm	3:48p
74	B14/8	19:11	3:19pm	3:29pm	3:54p
75	A14/8	19:11	3:25pm	3:35pm	4:00p
76	A16/8	19:11	3:31pm	3:41pm	4:06p
77	B16/8	19:11	3:37pm	3:47pm	4:12p
78	A18/8	19:11	3:43pm	3:53pm	4:18p

PASS_n — B3\/7

P U S H I N G S C H E D U L E

Thursday, October 8, 1992 Turn 1
Batteries: 7-9_2

Seq #	Oven	Last Pushed	Earliest	Desired	Latest
1	B19/9	19:06	11:50pm	12:00am	12:10a
2	A19/7	19:06	11:56pm	12:06am	12:16a
3	B31/7	19:12	12:02am	12:12am	12:22a
4	B21/9	19:12	12:08am	12:18am	12:28a
5	A21/7	19:12	12:14am	12:24am	12:34a
6	B23/9	19:12	12:20am	12:30am	12:40a
7	A23/7	19:12	12:26am	12:36am	12:46a
8	B25/9	19:12	12:32am	12:42am	12:52a
9	A25/7	19:12	12:38am	12:48am	12:58a
10	B27/9	19:12	12:44am	12:54am	1:04a
11	A27/7	19:12	12:50am	1:00am	1:10a
12	B29/9	19:12	12:56am	1:06am	1:16a
13	A29/7	19:12	1:02am	1:12am	1:22a
14	B31/9	19:12	1:08am	1:18am	1:28a
15	A31/7	19:12	1:14am	1:24am	1:34a
16	C2 /9	19:12	1:20am	1:30am	1:40a
17	A2 /8	19:12	1:26am	1:36am	1:46a
18	B2 /7	19:12	1:32am	1:42am	1:52a
19	A4 /8	19:12	1:38am	1:48am	1:58a
20	B4 /7	19:12	1:44am	1:54am	2:04a
21	A6 /8	19:12	1:50am	2:00am	2:10a
22	B6 /7	19:12	1:56am	2:06am	2:16a
23	A8 /8	19:12	2:02am	2:12am	2:22a
24	B8 /7	19:12	2:08am	2:18am	2:28a
25	A10/8	19:12	2:14am	2:24am	2:34a
26	B10/7	19:12	2:20am	2:30am	2:40a
27	A12/8	19:12	2:26am	2:36am	2:46a
28	B12/7	19:12	2:32am	2:42am	2:52a
29	A14/8	19:12	2:38am	2:48am	2:58a
30	B14/7	19:12	2:44am	2:54am	3:04a
31	A16/8	19:12	2:50am	3:00am	3:10a
32	B16/7	19:12	2:56am	3:06am	3:16a
33	A18/8	19:12	3:02am	3:12am	3:22a
34	B18/7	19:12	3:08am	3:18am	3:28a
35	A20/8	19:12	3:14am	3:24am	3:34a
36	B20/7	19:12	3:20am	3:30am	3:40a
37	A22/8	19:12	3:26am	3:36am	3:46a
38	B22/7	19:12	3:32am	3:42am	3:52a
39	A24/8	19:12	3:38am	3:48am	3:58a
40	B24/7	19:11	3:44am	3:54am	4:04a
41	A26/8	19:11	3:50am	4:00am	4:10a
42	B26/7	19:11	3:56am	4:06am	4:16a
43	A28/8	19:11	4:02am	4:12am	4:22a
44	B28/7	19:11	4:08am	4:18am	4:28a
45	A30/8	19:11	4:14am	4:24am	4:34a
46	B30/7	19:10	4:20am	4:30am	4:40a
47	A1 /9	19:10	4:26am	4:36am	4:46a
48	B1 /8	19:10	4:32am	4:42am	4:52a
49	A3 /9	19:10	4:38am	4:48am	4:58a
50	B3 /8	19:10	4:44am	4:54am	5:04a
51	A5 /9	19:10	4:50am	5:00am	5:10a
52	B5 /8	19:10	4:56am	5:06am	5:16a
53	A7 /9	19:09	5:02am	5:12am	5:22a
54	B7 /8	19:09	5:08am	5:18am	5:28a
55	A9 /9	19:09	5:14am	5:24am	5:34a
56	B9 /8	19:09	5:20am	5:30am	5:40a
57	A11/9	19:09	5:26am	5:36am	5:46a
58	B11/8	19:09	5:32am	5:42am	5:52a
59	A13/9	19:08	5:38am	5:48am	5:58a
60	B13/8	19:08	5:44am	5:54am	6:04a
61	A15/9	19:08	5:50am	6:00am	6:10a
62	B15/8	19:08	5:56am	6:06am	6:16a
63	A17/9	19:08	6:02am	6:12am	6:22a
64	B17/8	19:08	6:08am	6:18am	6:28a
65	A19/9	19:08	6:14am	6:24am	6:34a
66	B19/8	19:07	6:20am	6:30am	6:40a
67	A21/9	19:07	6:26am	6:36am	6:46a
68	B21/8	19:07	6:32am	6:42am	6:52a
69	A23/9	19:07	6:38am	6:48am	6:58a
70	B23/8	19:07	6:44am	6:54am	7:04a
71	A25/9	19:07	6:50am	7:00am	7:10a
72	B25/8	19:06	6:56am	7:06am	7:16a
73	A27/9	19:06	7:02am	7:12am	7:22a
74	B27/8	19:06	7:08am	7:18am	7:28a
75	A29/9	19:06	7:14am	7:24am	7:34a
76	B29/8	19:06	7:20am	7:30am	7:40a
77	A31/9	19:06	7:26am	7:36am	7:46a
78	B31/8	19:06	7:32am	7:42am	7:52a
79	C2 /9	19:05	7:38am	7:48am	7:58a
80	B2 /9	19:05	7:44am	7:54am	8:04a

P U S H I N G S C H E D U L E

Friday. October 9, 1992 Turn 3
Batteries: 7-9 2

Seq #	Oven	Last Pushed	Earliest	Desired	Latest
1	A29/7	19:12	3:50pm	4:00pm	4:10pm
2	B31/9	19:12	3:56pm	4:06pm	4:16pm
3	A31/7	19:12	4:02pm	4:12pm	4:22pm
4	C2 /9	19:12	4:08pm	4:18pm	4:28pm
5	A2 /8	19:12	4:14pm	4:24pm	4:34pm
6	B2 /7	19:12	4:20pm	4:30pm	4:40pm
7	A4 /8	19:12	4:26pm	4:36pm	4:46pm
8	B4 /7	19:12	4:32pm	4:42pm	4:52pm
9	A6 /8	19:12	4:38pm	4:48pm	4:58pm
10	B6 /7	19:12	4:44pm	4:54pm	5:04pm
11	A8 /8	19:12	4:50pm	5:00pm	5:10pm
12	B8 /7	19:12	4:56pm	5:06pm	5:16pm
13	A10/8	19:12	5:02pm	5:12pm	5:22pm
14	B10/7	19:12	5:08pm	5:18pm	5:28pm
15	A12/8	19:12	5:14pm	5:24pm	5:34pm
16	B12/7	19:12	5:20pm	5:30pm	5:40pm
17	A14/9	19:12	5:26pm	5:36pm	5:46pm
18	B14/7	19:12	5:32pm	5:42pm	5:52pm
19	A16/8	19:12	5:38pm	5:48pm	5:58pm
20	B16/7	19:12	5:44pm	5:54pm	6:04pm
21	A18/8	19:12	5:50pm	6:00pm	6:10pm
22	B18/7	19:12	5:56pm	6:06pm	6:16pm
23	A20/8	19:12	6:02pm	6:12pm	6:22pm
24	B20/7	19:12	6:08pm	6:18pm	6:28pm
25	A22/8	19:12	6:14pm	6:24pm	6:34pm
26	B22/7	19:12	6:20pm	6:30pm	6:40pm
27	A24/8	19:12	6:26pm	6:36pm	6:46pm
28	B24/7	19:12	6:32pm	6:42pm	6:52pm
29	A26/8	19:12	6:38pm	6:48pm	6:58pm
30	B26/7	19:12	6:44pm	6:54pm	7:04pm
31	A28/8	19:12	6:50pm	7:00pm	7:10pm
32	B28/7	19:12	6:56pm	7:06pm	7:16pm
33	A30/8	19:12	7:02pm	7:12pm	7:22pm
34	B30/7	19:12	7:08pm	7:18pm	7:28pm
35	A1 /9	19:12	7:14pm	7:24pm	7:34pm
36	B1 /8	19:12	7:20pm	7:30pm	7:40pm
37	A3 /9	19:12	7:26pm	7:36pm	7:46pm
38	B3 /8	19:12	7:32pm	7:42pm	7:52pm
39	A5 /9	19:12	7:38pm	7:48pm	7:58pm
40	B5 /8	19:06	7:44pm	7:54pm	8:04pm
41	A7 /9	19:06	7:50pm	8:00pm	8:10pm
42	B7 /8	19:06	7:56pm	8:06pm	8:16pm
43	A9 /9	19:06	8:02pm	8:12pm	8:22pm
44	B9 /8	19:06	8:08pm	8:18pm	8:28pm
45	A11/9	19:06	8:14pm	8:24pm	8:34pm
46	B11/8	19:06	8:20pm	8:30pm	8:40pm
47	A13/9	19:06	8:26pm	8:36pm	8:46pm
48	B13/8	19:06	8:32pm	8:42pm	8:52pm
49	A15/9	19:06	8:38pm	8:48pm	8:58pm
50	B15/8	19:06	8:44pm	8:54pm	9:04pm
51	A17/9	19:06	8:50pm	9:00pm	9:10pm
52	B17/8	19:06	8:56pm	9:06pm	9:16pm
53	A19/9	19:06	9:02pm	9:12pm	9:22pm
54	B19/8	19:06	9:08pm	9:18pm	9:28pm
55	A21/9	19:06	9:14pm	9:24pm	9:34pm
56	B21/8	19:06	9:20pm	9:30pm	9:40pm
57	A23/9	19:06	9:26pm	9:36pm	9:46pm
58	B23/8	19:06	9:32pm	9:42pm	9:52pm
59	A25/9	19:06	9:38pm	9:48pm	9:58pm
60	B25/8	19:06	9:44pm	9:54pm	10:04pm
61	A27/9	19:06	9:50pm	10:00pm	10:10pm
62	B27/8	19:06	9:56pm	10:06pm	10:16pm
63	A29/9	19:06	10:02pm	10:12pm	10:22pm
64	B29/8	19:06	10:08pm	10:18pm	10:28pm
65	A31/9	19:06	10:14pm	10:24pm	10:34pm
66	B31/8	19:06	10:20pm	10:30pm	10:40pm
67	C2 /8	19:06	10:26pm	10:36pm	10:46pm
68	B2 /9	19:06	10:32pm	10:42pm	10:52pm
69	A2 /7	19:06	10:38pm	10:48pm	10:58pm
70	B4 /9	19:06	10:44pm	10:54pm	11:04pm
71	A4 /7	19:06	10:50pm	11:00pm	11:10pm
72	B6 /9	19:06	10:56pm	11:06pm	11:16pm
73	A6 /7	19:06	11:02pm	11:12pm	11:22pm
74	B8 /9	19:06	11:08pm	11:18pm	11:28pm
75	A8 /7	19:06	11:14pm	11:24pm	11:34pm
76	B10/9	19:06	11:20pm	11:30pm	11:40pm
77	A10/7	19:06	11:26pm	11:36pm	11:46pm
78	B12/9	19:06	11:32pm	11:42pm	11:52pm
79	A12/7	19:06	11:38pm	11:48pm	11:58pm
80	B13/9	19:06	[illegible]	[illegible]	[illegible]

P U S H I N G S C H E D U L E

Friday, October 9, 1992 Turn 2
Batteries: 7-9 2

Seq #	Oven	Last Pushed	Earliest	Desired	Latest
1	B13/7	19:36	7:50am	8:00am	8:25am
2	A15/8	19:36	7:57am	8:06am	8:31am
3	B15/7	19:36	8:02am	8:12am	8:37am
4	A17/8	19:36	8:08am	8:18am	8:43am
5	B17/7	19:36	8:14am	8:24am	8:49am
6	A19/8	19:36	8:20am	8:30am	8:55am
7	B19/7	19:36	8:26am	8:36am	9:01am
8	A21/8	19:36	8:33am	8:43am	9:08am
9	B21/7	19:36	8:39am	8:49am	9:14am
10	A23/8	19:36	8:45am	8:55am	9:20am
11	B23/7	19:36	8:51am	9:01am	9:26am
12	A25/8	19:36	8:57am	9:07am	9:32am
13	B25/7	19:36	9:03am	9:13am	9:38am
14	A27/8	19:36	9:10am	9:20am	9:45am
15	B27/7	19:36	9:16am	9:26am	9:51am
16	A29/8	19:36	9:22am	9:32am	9:57am
17	B29/7	19:36	9:28am	9:38am	10:03am
18	A31/8	19:36	9:34am	9:44am	10:09am
19	A2 /9	19:36	9:40am	9:50am	10:15am
20	B2 /8	19:36	9:46am	9:56am	10:21am
21	A4 /9	19:36	9:53am	10:03am	10:28am
22	B4 /8	19:36	9:59am	10:09am	10:34am
23	A6 /9	19:36	10:05am	10:15am	10:40am
24	B6 /8	19:36	10:11am	10:21am	10:46am
25	A8 /9	19:36	10:17am	10:27am	10:52am
26	B8 /8	19:36	10:23am	10:33am	10:58am
27	A10/9	19:36	10:30am	10:40am	11:05am
28	B10/8	19:36	10:36am	10:46am	11:11am
29	A12/9	19:36	10:42am	10:52am	11:17am
30	B12/8	19:36	10:48am	10:58am	11:23am
31	A14/9	19:04	10:54am	11:04am	11:29am
32	B14/8	19:04	11:00am	11:10am	11:35am
33	A16/9	19:04	11:06am	11:16am	11:41am
34	B16/8	19:05	11:13am	11:23am	11:48am
35	A18/9	19:05	11:17am	11:27am	11:54am
36	B18/8	19:05	11:25am	11:35am	12:00pm
37	A20/9	19:05	11:31am	11:41am	12:06pm
38	B20/8	19:05	11:37am	11:47am	12:12pm
39	A22/9	19:05	11:43am	11:53am	12:18pm
40	B22/8	19:06	11:50am	12:00pm	12:25pm
41	A24/9	19:06	11:56am	12:06pm	12:31pm
42	B24/8	19:06	12:02pm	12:12pm	12:37pm
43	A26/9	19:06	12:08pm	12:18pm	12:43pm
44	B26/8	19:06	12:14pm	12:24pm	12:49pm
45	A28/9	19:06	12:20pm	12:30pm	12:55pm
46	B28/8	19:06	12:26pm	12:36pm	1:01pm
47	A30/9	19:07	12:33pm	12:43pm	1:08pm
48	B30/8	19:07	12:39pm	12:49pm	1:14pm
49	C1 /8	19:07	12:45pm	12:55pm	1:20pm
50	B1 /9	19:07	12:51pm	1:01pm	1:26pm
51	A1 /7	19:07	12:57pm	1:07pm	1:32pm
52	B3 /9	19:07	1:03pm	1:13pm	1:38pm
53	A3 /7	19:07	1:09pm	1:19pm	1:44pm
54	B5 /9	19:08	1:16pm	1:26pm	1:51pm
55	A5 /7	19:08	1:22pm	1:32pm	1:57pm
56	B7 /9	19:08	1:28pm	1:38pm	2:03pm
57	A7 /7	19:08	1:34pm	1:44pm	2:09pm
58	B9 /9	19:08	1:40pm	1:50pm	2:15pm
59	A9 /7	19:08	1:46pm	1:56pm	2:21pm
60	B11/9	19:09	1:53pm	2:03pm	2:28pm
61	A11/7	19:09	1:59pm	2:09pm	2:34pm
62	B13/9	19:09	2:05pm	2:15pm	2:40pm
63	A13/7	19:09	2:11pm	2:21pm	2:46pm
64	B15/9	19:09	2:17pm	2:27pm	2:52pm
65	A15/7	19:09	2:23pm	2:33pm	2:58pm
66	B17/9	19:09	2:29pm	2:39pm	3:04pm
67	A17/7	19:10	2:36pm	2:46pm	3:10pm
68	B19/9	19:10	2:42pm	2:52pm	3:17pm
69	A19/7	19:10	2:48pm	2:58pm	3:23pm
70	B21/9	19:10	2:54pm	3:04pm	3:29pm
71	A21/7	19:10	3:00pm	3:10pm	3:35pm
72	B23/9	19:10	3:06pm	3:16pm	3:41pm
73	A23/7	19:11	3:13pm	3:23pm	3:48pm
74	B25/9	19:11	3:19pm	3:29pm	3:54pm
75	A25/7	19:11	3:25pm	3:35pm	4:00pm
76	B27/9	19:11	3:31pm	3:41pm	4:06pm
77	A27/7	19:11	3:37pm	3:47pm	4:12pm
78	B29/9	19:17	3:43pm	3:53pm	4:18pm

P U S H I N G S C H E D U L E

Friday, October 9, 1992 Turn 1
Batteries: 7-9_2

Seq #	Oven	Last Pushed	Earliest	Desired	Lates
1	A30/9	19:36	11:50pm	12:00am	12:10a
2	B30/7	19:36	11:56pm	12:06am	12:16a
3	A1 /9	19:36	12:02am	12:12am	12:22a
4	B1 /8	19:36	12:08am	12:18am	12:28a
5	A3 /9	19:36	12:14am	12:24am	12:34a
6	B3 /8	19:36	12:20am	12:30am	12:40a
7	A5 /9	19:36	12:26am	12:36am	12:46a
8	B31/7	19:42	12:32am	12:42am	12:52a
9	B5 /8	19:42	12:38am	12:48am	12:58a
10	A7 /9	19:42	12:44am	12:54am	1:04a
11	B7 /8	19:42	12:50am	1:00am	1:10a
12	A9 /9	19:42	12:56am	1:06am	1:16a
13	B9 /8	19:42	1:02am	1:12am	1:22a
14	A11/9	19:42	1:08am	1:18am	1:28a
15	B11/8	19:42	1:14am	1:24am	1:34a
16	A13/9	19:42	1:20am	1:30am	1:40a
17	B13/8	19:42	1:26am	1:36am	1:46a
18	A15/9	19:42	1:32am	1:42am	1:52a
19	B15/8	19:42	1:38am	1:48am	1:58a
20	A17/9	38:50	1:44am	1:54am	2:04a
21	B17/8	38:50	1:50am	2:00am	2:10a
22	A19/9	38:50	1:56am	2:06am	2:16a
23	B19/8	38:49	2:02am	2:12am	2:22a
24	A21/9	38:47	2:08am	2:18am	2:28a
25	B21/8	38:49	2:14am	2:24am	2:34a
26	A23/9	38:49	2:20am	2:30am	2:40a
27	B23/8	38:49	2:26am	2:36am	2:46a
28	A25/9	38:49	2:32am	2:42am	2:52a
29	B25/8	38:48	2:38am	2:48am	2:58a
30	A27/9	38:48	2:44am	2:54am	3:04a
31	B27/8	38:48	2:50am	3:00am	3:10a
32	A29/9	38:48	2:56am	3:06am	3:16a
33	B29/8	38:48	3:02am	3:12am	3:22a
34	A31/9	38:48	3:08am	3:18am	3:28a
35	B31/8	38:48	3:14am	3:24am	3:34a
36	C1 /8	38:47	3:20am	3:30am	3:40a
37	B2 /9	38:47	3:26am	3:36am	3:46a
38	A2 /7	19:42	3:32am	3:42am	3:52a
39	B4 /9	19:42	3:38am	3:48am	3:58a
40	A4 /7	19:42	3:44am	3:54am	4:04a
41	B6 /9	19:42	3:50am	4:00am	4:10a
42	A6 /7	19:42	3:56am	4:06am	4:16a
43	B8 /9	19:42	4:02am	4:12am	4:22a
44	A8 /7	19:42	4:08am	4:18am	4:28a
45	B10/9	19:41	4:14am	4:24am	4:34a
46	A10/7	19:41	4:20am	4:30am	4:40a
47	B12/9	19:41	4:26am	4:36am	4:46a
48	A12/7	19:41	4:32am	4:42am	4:52a
49	B14/9	19:41	4:38am	4:48am	4:58a
50	A14/7	19:41	4:44am	4:54am	5:04a
51	B16/9	19:40	4:50am	5:00am	5:10a
52	A16/7	19:40	4:56am	5:06am	5:16a
53	B18/9	19:40	5:02am	5:12am	5:22a
54	A18/7	19:40	5:08am	5:18am	5:28a
55	B20/9	19:40	5:14am	5:24am	5:34a
56	A20/7	19:40	5:20am	5:30am	5:40a
57	B22/9	19:40	5:26am	5:36am	5:46a
58	A22/7	19:39	5:32am	5:42am	5:52a
59	B24/9	19:39	5:38am	5:48am	5:58a
60	A24/7	19:39	5:44am	5:54am	6:04a
61	B26/9	19:39	5:50am	6:00am	6:10a
62	A26/7	19:39	5:56am	6:06am	6:16a
63	B28/9	19:39	6:02am	6:12am	6:22a
64	A28/7	19:38	6:08am	6:18am	6:28a
65	B30/9	19:38	6:14am	6:24am	6:34a
66	C1 /9	19:38	6:20am	6:30am	6:40a
67	A30/7	19:38	6:26am	6:36am	6:46a
68	A1 /8	19:38	6:32am	6:42am	6:52a
69	B1 /8	19:38	6:38am	6:48am	6:58a
70	A3 /8	19:38	6:44am	6:54am	7:04a
71	B3 /7	19:37	6:50am	7:00am	7:10a
72	A5 /7	19:37	6:56am	7:06am	7:16a
73	B5 /7	19:37	7:02am	7:12am	7:22a
74	A7 /8	19:37	7:08am	7:18am	7:28a
75	B7 /8	19:37	7:14am	7:24am	7:34a
76	A9 /8	19:37	7:20am	7:30am	7:40a
77	B9 /7	19:36	7:26am	7:36am	7:46a
78	A11/7	19:36	7:32am	7:42am	7:52a
79	B11/7	19:36	7:38am	7:48am	7:58a
80	A13/8	19:36	7:44am	7:54am	8:04a

B34 H5/9

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

APPENDIX C

CALIBRATION RESULTS

KEYSTONE
ENVIRONMENTAL RESOURCES, INC

CONTROL BOX CALIBRATION

THREE POINT CALIBRATION

BOX # 6 BP 29.2 in. Hg
DATE 05-20-92 OPERATOR RPC

	WET TEST METER				DRY TEST METER					METER COEFFICIENT Y	ORIFICE COEFFICIENT ΔH@
	TIME (min)	TEMP TW	VOLUME VM	PRESSURE PW	TEMP IN TI	TEMP OUT TO	TEMP AVG TA	ORIFICE PD	VOLUME VD		
START			0.000	29.20				0.50	777.500		
HALF		72.0			94.0	83.0	88.5				
STOP	13.40		5.000						782.822		
CALCULATION	13.40	532.0	5.013	29.20			548.5	29.24	5.322	0.9698	2.002
START			0.000	29.20				1.00	783.500		
HALF		72.0			96.0	85.0	90.5				
STOP	9.46		5.000						788.954		
CALCULATION	9.46	532.0	5.013	29.20			550.5	29.27	5.454	0.9486	1.988
START			0.000	29.20				2.00	789.800		
HALF		72.0			109.0	89.0	99.0				
STOP	6.70		5.000						795.222		
CALCULATION	6.70	532.0	5.013	29.20			559.0	29.35	5.422	0.9665	1.964
AVERAGE										0.9617	1.985

POST TEST

BOX # 6 BP 28.65 in. Hg
DATE 11-2-92 OPERATOR RPC

	WET TEST METER				DRY TEST METER					METER COEFFICIENT	ORIFICE COEFFICIENT
	TIME (min)	TEMP TW	VOLUME VM	PRESSURE PW	TEMP IN TI	TEMP OUT TO	TEMP AVG TA	ORIFICE PD	VOLUME VD	Y	ΔH@
START			0.000	28.65				1.50	408.000		
HALF		70.0			95.0	75.0	85.0				
STOP	7.47		5.000						413.291		
CALCULATION	7.47	530.0	5.013	28.65			545.0	28.76	5.291	0.9704	1.900
START			0.000	28.65				1.50	413.600		
HALF		70.0			100.0	80.0	90.0				
STOP	7.48		5.000						418.892		
CALCULATION	7.48	530.0	5.013	28.65			550.0	28.76	5.292	0.9792	1.888
START			0.000	28.65				1.50	419.400		
HALF		70.0			105.0	85.0	95.0				
STOP	7.50		5.000						424.715		
CALCULATION	7.50	530.0	5.013	28.65			555.0	28.76	5.315	0.9838	1.881
AVERAGE										0.9778	1.889
DIFFERENCE										-1.6%	5.0%

PRE-TEST MAGNEHELIC CALIBRATION

BOX# 6
DATE 05-20-92
OPERATOR RPC

0 to 10" H2O RANGE

MAGNEHELIC Δ P	MANOMETER
0.50	0.50
1.00	1.00
2.00	2.00
4.00	4.00
6.00	6.00
8.00	8.00

0 to 0.50" H2O RANGE

MAGNEHELIC Δ P	MANOMETER
0.50	---
0.40	---
0.30	---
0.20	---
0.10	---

Calibration not necessary.
Primary standard on control box.

0 to 5" H2O RANGE

MAGNEHELIC Δ H	MANOMETER
4.00	4.00
3.00	3.00
2.00	2.00
1.00	1.00
0.50	0.50

PRE-TEST LEAK CHECK

DATE 05-20-92
OPERATOR RPC

	START CF	STOP CF	VOLUME CF	TIME (min)	LEAK RATE
DRY	776.425	776.572	0.147	10.000	-0.002
WET	0.000	0.131	0.131		

PYROMETER CALIBRATION

DATE 04-28-88
OPERATOR AGL

VOLTAGE INPUT (mV)	TARGET TEMP (°F)	TEMP READING (°F)
0.18	40	40.0
0.40	50	50.0
0.84	70	70.0
1.29	90	90.0
1.74	110	110.0
2.66	150	150.0
3.82	200	200.0
6.09	300	301.0
8.31	400	400.0
10.57	500	500.0

PRE-TEST PYROMETER CHECK

DATE 05-20-92
OPERATOR RPC

VOLTAGE INPUT (mV)	TARGET TEMP (°F)	TEMP READING (°F)
0.18	40	41.0
0.40	50	51.0
0.84	70	70.0
1.29	90	90.0
1.74	110	110.0
2.66	150	150.0
3.82	200	200.0
6.09	300	300.0
8.31	400	399.0
10.57	500	500.0

POST-TEST MAGNEHELIC CALIBRATION

BOX# 6
DATE 11-02-92
OPERATOR RPC

0 to 10" H2O RANGE

MAGNEHELIC Δ P	MANOMETER
0.50	0.50
1.00	1.00
2.00	2.00
4.00	4.00
6.00	6.00
8.00	8.00

0 to 0.50" H2O RANGE

MAGNEHELIC Δ P	MANOMETER
0.50	---
0.40	---
0.30	---
0.20	---
0.10	---

Calibration not necessary.
Primary standard on control box.

0 to 5" H2O RANGE

MAGNEHELIC Δ H	MANOMETER
4.00	4.00
3.00	3.00
2.00	2.00
1.00	1.00
0.50	0.50

POST-TEST LEAK CHECK

DATE 9-3-92
OPERATOR RPC

	START CF	STOP CF	VOLUME CF	TIME (min)	LEAK RATE
DRY	401.290	401.410	0.120	10.000	0.0001
WET	0.000	0.121	0.121		

PYROMETER CALIBRATION

DATE 04-28-88
OPERATOR AGL

VOLTAGE INPUT (mV)	TARGET TEMP (°F)	TEMP READING (°F)
0.18	40	40.0
0.40	50	50.0
0.84	70	70.0
1.29	90	90.0
1.74	110	110.0
2.66	150	150.0
3.82	200	200.0
6.09	300	301.0
8.31	400	400.0
10.57	500	500.0

POST-TEST PYROMETER CHECK

DATE 9-3-92
OPERATOR RPC

VOLTAGE INPUT (mV)	TARGET TEMP (°F)	TEMP READING (°F)
0.18	40	40.0
0.40	50	50.0
0.84	70	70.0
1.29	90	90.0
1.74	110	110.0
2.66	150	151.0
3.82	200	200.0
6.09	300	300.0
8.31	400	402.0
10.57	500	502.0

QA ORIFICE AUDIT

ORIFICE	BAPC-3	DATE	10-27-92	B.P.	28.80
OPERATOR	RPC	BOX #	6		

RUN	1		2		3	
INITIAL CF	374.300		382.200		390.100	
FINAL CF	381.841		389.751		397.662	
DIFFERENCE	7.541		7.551		7.562	
	IN	OUT	IN	OUT	IN	OUT
TEMP INITIAL	77	77	81	77	85	79
TEMP 5 MIN	79	77	84	77	87	80
TEMP 10 MIN	79	77	84	79	89	81
TEMP 15 MIN	81	77	85	79	89	82
		TEMP R		TEMP R		TEMP R
TEMP AVG	78	538	80.75	540.75	84	544
TIME (MIN.)	15.00		15.00		15.00	
	IN WATE	IN HG	IN WATER	IN HG	IN WATER	IN HG
ORIFICE	0.70	0.05	0.70	0.05	0.70	0.05
METER PRESSURE		28.85		28.85		28.85
	°F	°C	°F	°C	°F	°C
AMBIENT TEMP.	78.0	25.6	80.0	26.7	84.0	28.9
VACUUM IN HG	18.0		18.0		18.0	
DGM CAL Y	0.9617		0.9617		0.9617	
STD CF	6.889		6.863		6.832	
STD CUBIC METERS	0.1951		0.1944		0.1935	

GEOMETRIC PITOT CALIBRATION

Caliper # XCF-59
Precheck ✓
Post Check

Probe #: 10-1
Date: 9-10-92
Initials: RM

①



a^1 = 1.0°
a^2 = 0.5°
$a^1, a^2 = <10°$

B^1 = 4.0°
B^2 = 3.0°
$B^1, B^2, = <5°$

F = 0.970"

②

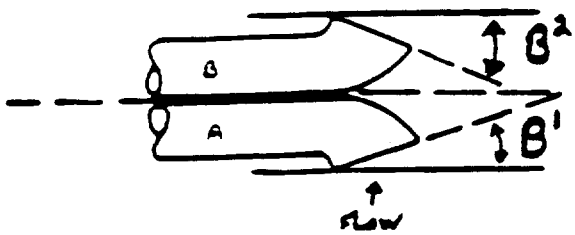

μ = 0.0169" — μ = ≤ 0.1250" (μ = F TAN γ)
V = 0.0169" — V = ≤0.03125" (V = F TAN θ)
W = 0.408 — W ≥ 0"

③

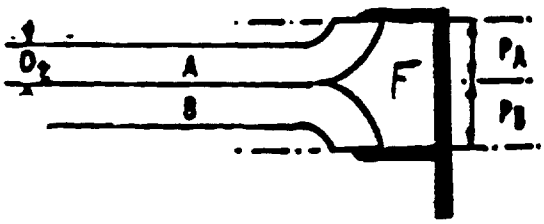

1.05 D_t < B < 1.50 D_t
$P_A = P_B$
2.10 D_t < A < 3.00 D_t

X = 0.783 — X ≥ 0.750" (3/4" using 1/2" nozzle)
Y = 6.138 — Y ≥ 3.0"
Z = 2.980 — Z > 2.0"
D_t = 0.375 — D_t > .1875" to .375" (3/16" to 3/8")

④

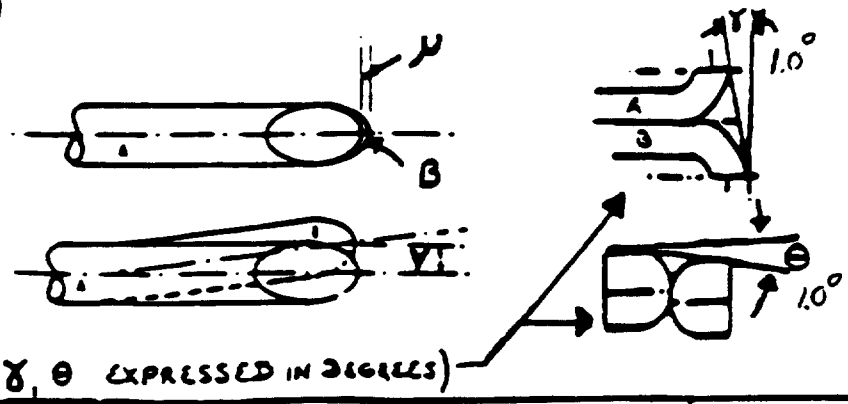

(γ, θ EXPRESSED IN DEGREES)

⑥

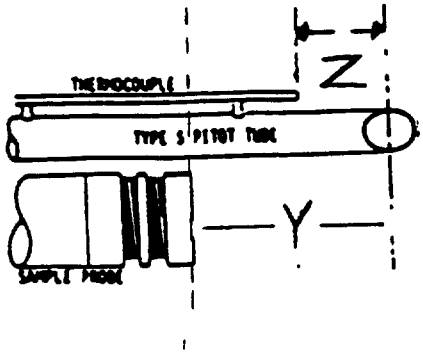

⑤

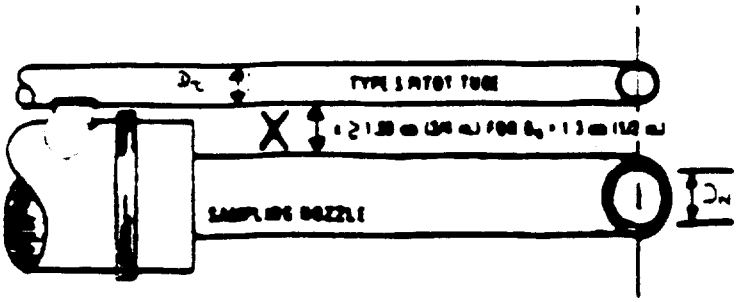

⑦

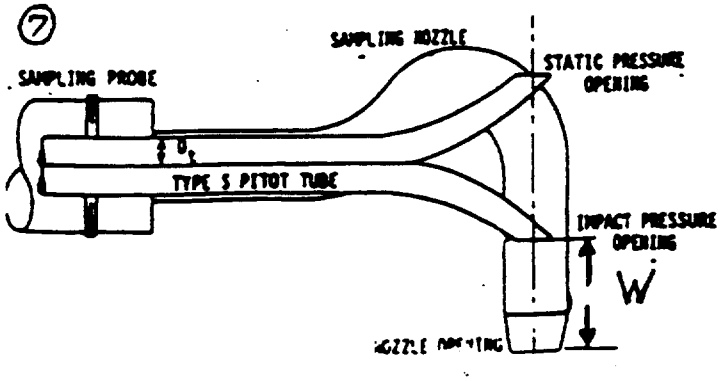

GEOMETRIC PITOT CALIBRATION

Caliper # XFS-68 | Probe #: 10-1
Precheck | Date: 11-2-92
Post Check ✓ | Initials: [illegible]

①



a^1 = 4.0°
a^2 = 4.0°
a^1, a^2 = <10°

B^1 = 2.0°
B^2 = 2.5°
B^1, B^2, = <5°

F = 0.952"

②

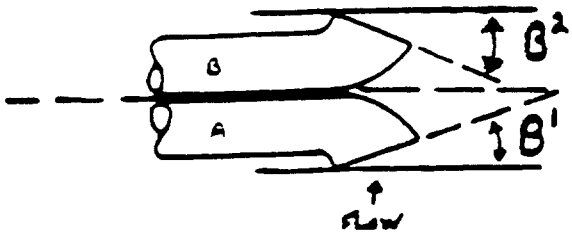

μ = 0.0146 — μ = ≤ 0.1250" (μ = F TAN γ)
V = 0.0146 — V = ≤0.03125" (V = F TAN θ)
W = 0.438 — W ≥ 0"
X = 0.844 — X ≥ 0.750" (3/4" using 1/2" nozzle)

③

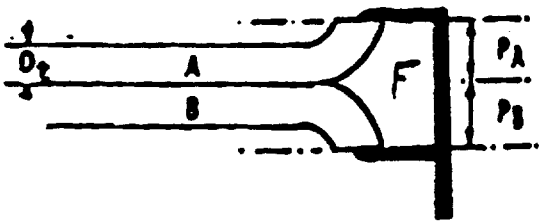

1.05 D_t < d < 1.50 D_t
$P_A = P_B$
2.10 D_t < A < 3.00 D_t

Y = 6.324 — Y ≥ 3.0"
Z = 2.956 — Z > 2.0"
D_t = 0.375 — D_t > .1875" to .375" (3/16" to 3/8")

④

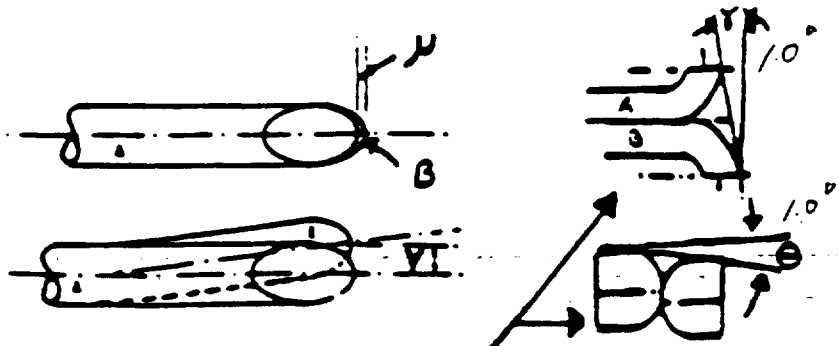

(γ, θ EXPRESSED IN DEGREES)

⑥

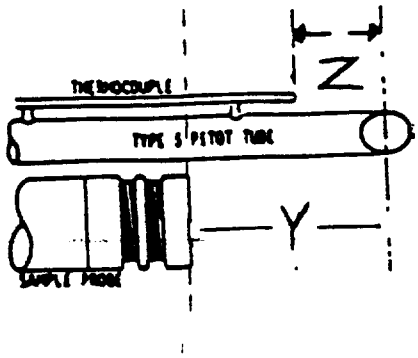

⑤

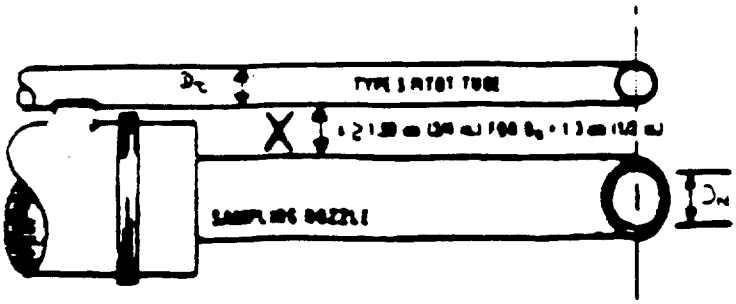

⑦

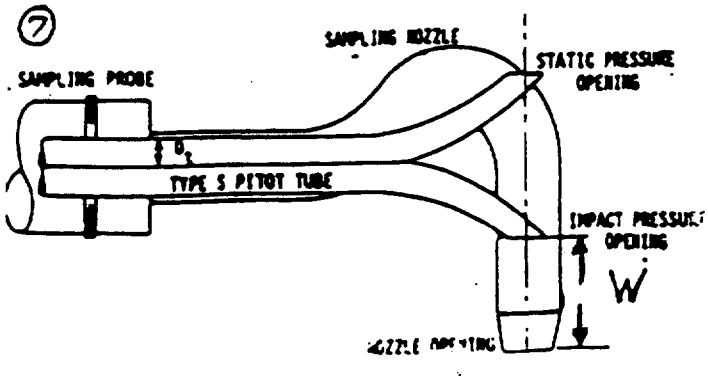

GEOMETRIC PITOT CALIBRATION

Caliper # XEF-59
Precheck ✓
Post Check

Probe #: 10-2
Date: 9-10-92
Initials: TM

①



a^1 = 4.0°
a^2 = 1.0°
a^1, a^2 = <10°

B^1 = 0°
B^2 = 0°
B^1, B^2, = <5°

②

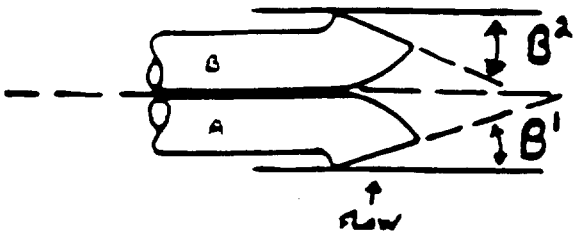

F = 0.909"

μ = 0.0159" — μ = ≤ 0.1250" (μ = F TAN γ)

V = Ø — V = ≤0.03125" (V = F TAN θ)

W = 0.328 — W ≥ 0"

X = 1.048 — X ≥ 0.750" (3/4" using 1/2" nozzle)

Y = 5.608 — Y ≥ 3.0"

Z = 2.270 — Z > 2.0"

D_t = 0.375 — D_t > .1875" to .375" (3/16" to 3/8")

③

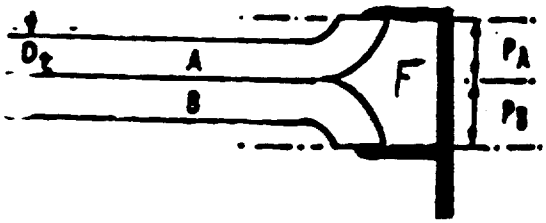

1.05 D_t < A < 1.50 D_t
P_A = P_B
2.10 D_t < A < 3.00 D_t

④

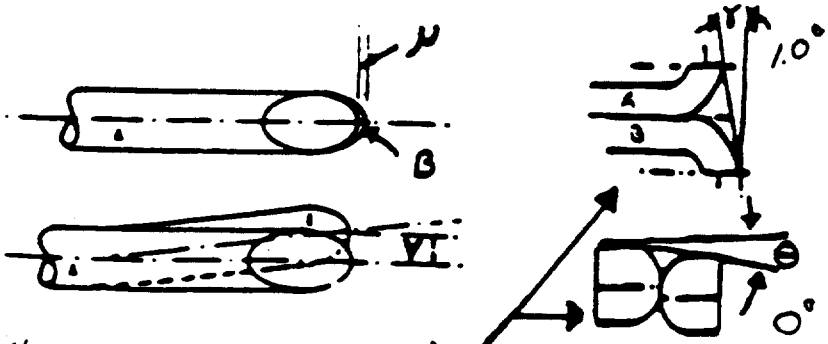

(γ, θ EXPRESSED IN DEGREES)

⑥

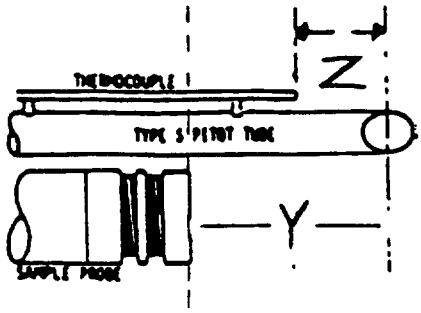

⑤

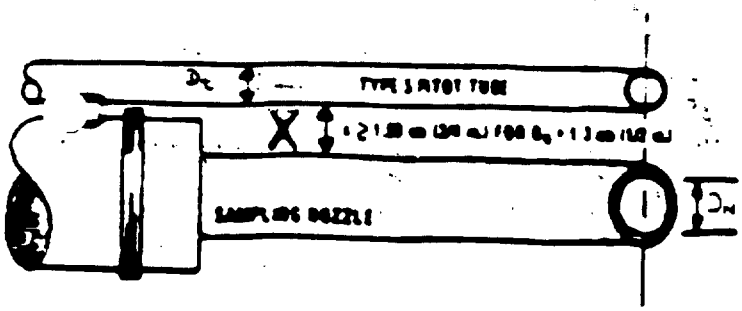

⑦

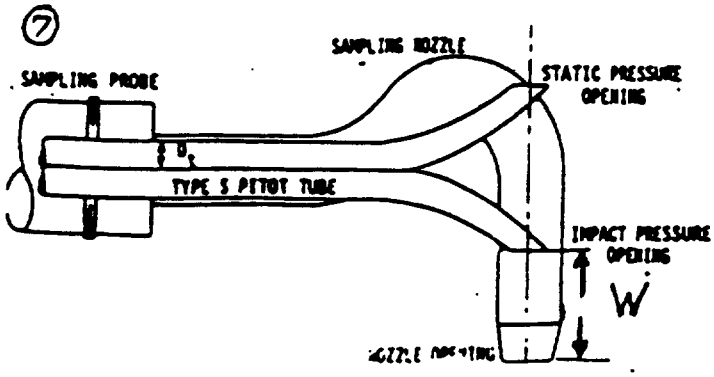

GEOMETRIC PITOT CALIBRATION

Caliper # XFS-68
Precheck
Post Check X

Probe #: 10-2
Date: 11-2-92
Initials: [illegible]

①



a^1 = 3.5°
a^2 = 1.0°
a^1, a^2 = <10°

B^1 = 2.0
B^2 = 0
B^1, B^2, = <5°

F = 0.932"

②

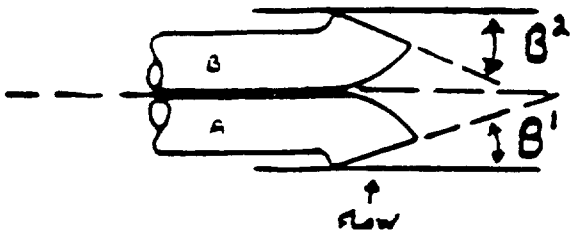

μ = 0 — μ = ≤ 0.1250" (μ = F TAN γ)

V = 0 — V = ≤0.03125" (V = F TAN θ)

W = 0.286 — W ≥ 0"

X = 0.943 — X ≥ 0.750" (3/4" using 1/2" nozzle)

③

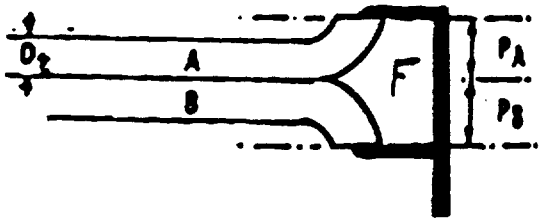

1.05 D_t < d < 1.50 D_t
P_A = P_B
2.10 D_t < L < 3.00 D_t

Y = 5.589 — Y ≥ 3.0"

Z = 3.206 — Z > 2.0"

D_t = 0.376 — D_t > .1875" to .375" (3/16" to 3/8")

④

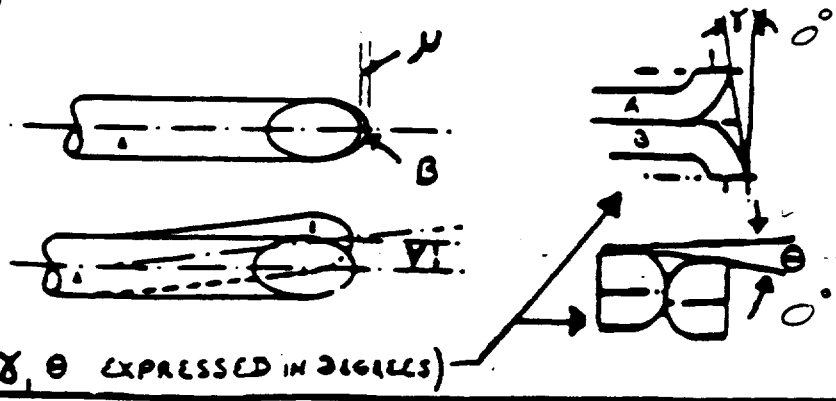

(γ, θ EXPRESSED IN DEGREES)

⑥

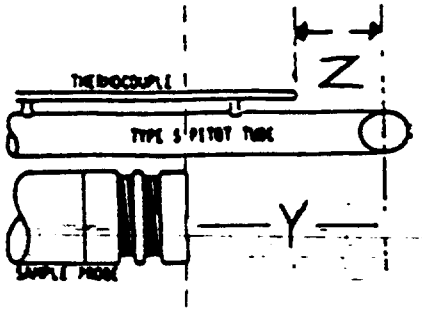

⑤

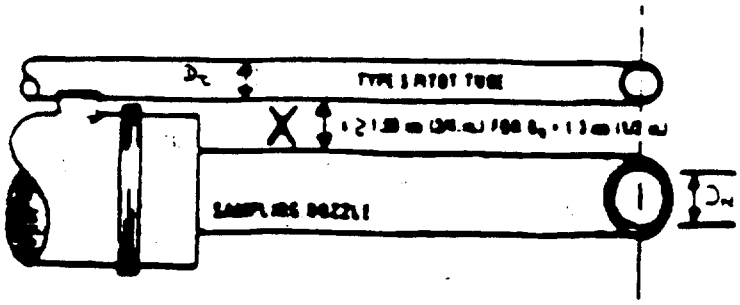

⑦

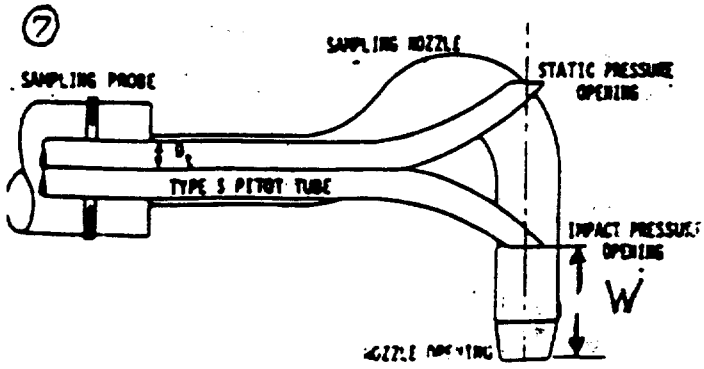

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

APPENDIX D

FIELD DATA SHEETS

KEYSTONE
ENVIRONMENTAL RESOURCES, INC.

D/0

KEYSTONE ENVIRONMENTAL RESOURCES / AIR QUALITY ENGINEERING
STACK SAMPLING DATA SHEET

CLIENT USS Clairton Works
TEST UNIT #9 Battery Stack
PROJECT NO. 6050AB-01
TEST CREW DB, MV & RC
BAROMETRIC PRESSURE 29.35

TEST DATE 10-8-92
TEST NO. CLR-9B3-1
NOZZLE (SIZE, in) 0.435
STATIC PRESSURE -1.0
PORT DIRECTION S/W/N

ORIFICE CORRECTION (ΔH@) 1.985
METER CORRECTION (Y) 0.9617
CALIBRATION DATE 5-20-92
PITOT CORRECTION 0.84
CONTROL BOX NO. 6

HOT/COLD BOX NO. 3
PROBE NO. 10-1
FILTER NO. ~~435~~ 935 DEB
STACK DIA. 114"
PORT SIZE 4" Bolted Flange

	Traverse Point (inches)	Time	Dry Gas Meter Reading (dcf)	Pitot ΔP (in. H2O)	Orifice ΔH Required (in. H2O)	Orifice ΔH Actual (in. H2O)	Meter Temperature In (°F)	Meter Temperature Out (°F)	Vacuum (in. Hg)	Stack Temp. (°F)	Probe Temp. (°F)	Impinger Temp. (°F)	Hot Box Temp. (°F)	Comments
S	40.6	853	847.818	0.11	1.97	2.00	47	48	5.0	490	240	51	250	5 min./point
	28.5	5		0.10	1.79	1.80	69	49	5.0	490				
	20.2	10		0.10	1.79	1.80	75	52	5.0	499		46		
	13.5	15		0.08	1.48	1.50	81	55	4.0	509	235		250	
	7.6	20		0.06	1.11	1.10	81	57	3.5	498				
S	2.4	923 25	867.891	0.02	0.37	0.35	79	59	2.5	497				
W	40.6	933	867.891	~~0.40~~ 0.09	1.66	1.65	77	60	4.0	490				
	28.5			0.08	1.48	1.50	82	61	4.0	499				
	20.2			0.08	1.48	1.50	84	62	4.0	501				
	13.5			0.06	1.1	1.1	85	64	3.5	500				
	7.6			0.07	1.29	1.30	89	65	4.0	496				
W	2.4	1003	887.062	0.01	0.18	0.20	83	69	2.5	501				
N	40.6	1010	887.062	0.09	1.66	1.65	80	67	4.5	505				
	28.5			0.09	1.66	1.65	89	69	4.0	519				
	20.2			0.12	2.21	2.20	92	69	5.0	506				
	13.5			0.08	1.48	1.50	90	70	4.0	503				Estimates:
	7.6			0.01	0.18	0.20	85	70	2.5	495				MW= 28.0
N	2.4	1040	906.629	0.01	0.18	0.20	86	70	2.5	501				%H2O=13.6

SYSTEM LEAK CHECK

	Vacuum (in. Hg)	DGM Rate (cfm)
Before	5.0	0.015
After	5.0	0.006

PITOT LEAK CHECK 15sec

	Positive	Negative
Before	OK	OK
After		

GAS	1	2
CO2	4.0	4.5
O2	13.5	13.5
CO		
N2		

Impinger No.	Impinger Contents	Final	Initial	Difference
1.	100 mL DI H_2O	633.8	538.0	95.8
2.	100 mL DI H_2O	606.8	574.0	32.8
3.	Empty	446.3	442.5	3.8
4.	Silica Gel	674.0	657.7	16.3
5.				

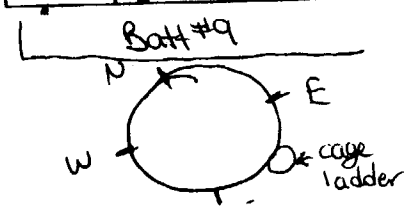

AQE 6/92

KEYSTONE ENVIRONMENTAL RESOURCES / AIR QUALITY ENGINEERING
STACK SAMPLING DATA SHEET

CLIENT USS Clairton Works
TEST UNIT #9 Battery Stack
PROJECT NO. 60504C3-01
TEST CREW MV, RC, & OB
BAROMETRIC PRESSURE 29.35

TEST DATE 10-8-92
TEST NO. CLR-9B5-1
NOZZLE (SIZE,#) 0.435
STATIC PRESSURE -1.0
PORT DIRECTION E

ORIFICE CORRECTION (ΔH@) 1.985
METER CORRECTION (Y) 0.9617
CALIBRATION DATE 5-20-92
PITOT CORRECTION 0.84
CONTROL BOX NO. 6

HOT/COLD BOX NO. 3
PROBE NO. 10-1
FILTER NO. 935
STACK DIA. 114"
PORT SIZE 4"

	Traverse Point (inches)	Time	Dry Gas Meter Reading (dcf)	Pitot ΔP (in. H2O)	Orifice ΔH Required (in. H2O)	Orifice ΔH Actual (in. H2O)	Meter Temperature In (°F)	Meter Temperature Out (°F)	Vacuum (in. Hg)	Stack Temp. (°F)	Probe Temp. (°F)	Impinger Temp. (°F)	Hot Box Temp. (°F)	Comments
E	40.6	1048	906.629	0.10	1.84	1.85	83	70	4.5	505				5 min./point
	28.5			0.10	1.84	1.85	91	70	4.5	521				
	20.2			0.09	1.66	1.65	95	71	4.0	491				
	13.5	15		0.08	1.48	1.50	95	73	4.5	495				
	7.6	20		0.08	1.48	1.50	99	74	4.0	497				
E	2.4	1118	927.743	0.03	0.55	0.55	95	75	3.0	505				

Estimates:
MW= 28.0
%H2O= 13.6

SYSTEM LEAK CHECK

	Vacuum (in. Hg)	DGM Rate (cfm)
Before	~~5.0~~	~~0.018~~
After		

JEB

PITOT LEAK CHECK

	Positive	Negative
Before		
After		

GAS	1	2
CO2		
O2		
CO		
N2		

Impinger No.	Impinger Contents	Final	Initial	Difference
1.	100 mL DI H_2O			
2.	100 mL DI H_2O			
3.	Empty			
4.	Silica Gel			
5.				

5/0

KEYSTONE ENVIRONMENTAL RESOURCES / AIR QUALITY ENGINEERING
STACK SAMPLING DATA SHEET

0.9617 JEB

CLIENT	USS Clairton Works	TEST DATE	10-8-92	ORIFICE CORRECTION (ΔH@)	1.986
TEST UNIT	#9 Battery Stack	TEST NO.	CLR-9BS-2	METER CORRECTION (Y)	0.9761
PROJECT NO.	605048-01	NOZZLE (SIZE,#)	0.435	CALIBRATION DATE	5-20-92
TEST CREW	DB, MV, & RC	STATIC PRESSURE	-1.0	PITOT CORRECTION	0.84
BAROMETRIC PRESSURE	29.25	PORT DIRECTION	E/N/W	CONTROL BOX NO.	6

HOT/COLD BOX NO. 5
PROBE NO. 10-2
FILTER NO. 939
STACK DIA. 114"
PORT SIZE 4" Bolted flange

	Traverse Point (inches)	Time	Dry Gas Meter Reading (dcf)	Pitot ΔP (in. H2O)	Orifice ΔH Required (in. H2O)	Orifice ΔH Actual (in. H2O)	Meter Temperature In (°F)	Meter Temperature Out (°F)	Vacuum (in. Hg)	Stack Temp. (°F)	Probe Temp. (°F)	Impinger Temp. (°F)	Hot Box Temp. (°F)	Comments
E	40.6	1504	938.410	0.07	1.29	1.30	84	79	3.0	476	≤250	60	250	5 min./point
	28.5			0.06	1.11	1.10	94	79	2.5	486				
	20.2			0.06	1.11	1.10	102	82	2.5	490		56		
	13.5			0.05	0.92	0.90	105	84	2.0	446	230			
	7.6			0.07	1.29	1.30	109	87	3.0	481		49		
E	2.4	1534	946.651	0.06	1.11	1.10	111	89	2.5	492				
N	40.6	1546	946.651	0.07	1.29	1.30	93	85	3.0	490				
	28.5			0.07	1.29	1.30	105	85	3.0	499	235	53		
	20.2			0.06	1.11	1.10	109	87	2.5	471				
	13.5			0.05	0.92	0.92	109	87	2.5	469		55		
	7.6			0.06	1.11	1.10	111	90	2.5	480		56		
N	2.4	1616	964.695	0.01	0.18	0.20	105	91	2.0	487				
W	40.6	1625	964.695	0.08	1.48	1.50	89	89	3.5	491				
	28.5	5		0.08	1.48	1.50	111	91	3.5	470				
	20.2	10		0.07	1.29	1.30	114	93	3.0	482				
	13.5	15		0.06	1.11	1.10	115	94	3.0	487				Estimates:
	7.6	20		0.10	1.84	1.85	117	94	4.0	467		63		MW= 28.0
W	2.4	1655	985.487	0.08	1.48	1.50	118	95	3.5	481				%H2O=13.6

SYSTEM LEAK CHECK

	Vacuum (in. Hg)	DGM Rate (cfm)
Before	5.0	0.018
After	5.0	0.010

#9 Battery

PITOT LEAK CHECK 15sec

	Positive	Negative
Before	OK	OK
After	OK	OK

GAS	1	2
CO2	13.5	14.0
O2	3.0	3.0
CO		
N2		

Impinger No.	Impinger Contents	Final	Initial	Difference
1.	100 mL DI H_2O	712.7	572.3	140.4
2.	100 mL DI H_2O	600.9	572.2	28.7
3.	Empty	454.3	451.1	3.2
4.	Silica Gel	683.4	668.9	14.5
5.				



KEYSTONE ENVIRONMENTAL RESOURCES / AIR QUALITY ENGINEERING
STACK SAMPLING DATA SHEET

CLIENT	USS Clairton Works	TEST DATE	10-8-92	ORIFICE CORRECTION (ΔH@) 1.985	HOT/COLD BOX NO. 5
TEST UNIT	#9 Battery Stack	TEST NO.	CLR-9BS-2	METER CORRECTION (Y) 0.9617	PROBE NO. 10-2
PROJECT NO.	60504B-01	NOZZLE (SIZE,#)	0.435	CALIBRATION DATE 5-20-92	FILTER NO. 939
TEST CREW	MV, RC, & OB	STATIC PRESSURE	-1.0	PITOT CORRECTION 0.84	STACK DIA. 114"
BAROMETRIC PRESSURE	29.25	PORT DIRECTION	S	CONTROL BOX NO. 6	PORT SIZE 4"

	Traverse Point (inches)	Time	Dry Gas Meter Reading (dcf)	Pitot ΔP (in. H2O)	Orifice ΔH Required (in. H2O)	Orifice ΔH Actual (in. H2O)	Meter Temperature In (°F)	Meter Temperature Out (°F)	Vacuum (in. Hg)	Stack Temp. (°F)	Probe Temp. (°F)	Impinger Temp. (°F)	Hot Box Temp. (°F)	Comments
S	40.6	1702	985.487	0.08	1.48	1.50	99	94	3.5	494				5 min./point
	28.5	07		0.09	1.66	1.65	110	94	3.5	497				
	20.2	12		0.08	1.48	1.50	113	93	3.5	498				
	13.5	17		0.06	1.11	1.10	114	94	3.0	502				
	7.6	22		0.09	1.66	1.65	115	94	3.5	485				
S	2.4	1732	1006.381	0.09	1.66	1.65	115	95	4.0	491				
														Estimates:
														MW= 28.0
														%H2O= 13.6

SYSTEM LEAK CHECK

	Vacuum (in. Hg)	DGM Rate (cfm)
Before		
After		

PITOT LEAK CHECK

	Positive	Negative
Before		
After		

GAS	1	2
CO2		
O2		
CO		
N2		

Impinger No.	Impinger Contents	Final	Initial	Difference
1.	100mL DI H_2O			
2.	100 mL DI H_2O			
3.	Empty			
4.	Silica Gel			
5.				

5/0

KEYSTONE ENVIRONMENTAL RESOURCES / AIR QUALITY ENGINEERING
STACK SAMPLING DATA SHEET

CLIENT	USS Clairton Works	TEST DATE	10-8-92	ORIFICE CORRECTION (ΔH@)	1.985	HOT/COLD BOX NO.	8
TEST UNIT	#9 Battery Stack	TEST NO.	CLR-9B5-3	METER CORRECTION (Y)	0.9617	PROBE NO.	10-1
PROJECT NO.	605048-01	NOZZLE (SIZE,#)	0.435	CALIBRATION DATE	5-20-92	FILTER NO.	938
TEST CREW	DB, MV & RC	STATIC PRESSURE	-1.0	PITOT CORRECTION	0.84	STACK DIA.	114"
BAROMETRIC PRESSURE	29.20	PORT DIRECTION	S/W/N	CONTROL BOX NO.	6	PORT SIZE	4" Bolted Flange

	Traverse Point (inches)	Time	Dry Gas Meter Reading (dcf)	Pitot ΔP (in. H2O)	Orifice ΔH Required (in. H2O)	Orifice ΔH Actual (in. H2O)	Meter Temperature In (°F)	Meter Temperature Out (°F)	Vacuum (in. Hg)	Stack Temp. (°F)	Probe Temp. (°F)	Impinger Temp. (°F)	Hot Box Temp. (°F)	Comments
S	40.6	1208	006.673	0.09	1.66	1.65	71	65	3.0	523	250	55	250	5 min./point
	28.5	13		0.08	1.48	1.50	79	65	3.0	529				
	20.2	18		0.07	1.29	1.30	89	67	3.0	535		53	220	
	13.5	23		0.06	1.11	1.10	91	69	2.5	515				
	7.6	28		0.06	1.11	1.10	94	71	2.5	509		54	225	
S	2.4	1238	025.064	0.01	0.18	0.20	95	73	2.0	511				
W	40.6	1244	025.064	0.09	1.66	1.65	82	73	3.5	505		55		
	28.5			0.08	1.48	1.50	92	73	3.0	520				
	20.2			0.07	1.31	1.30	95	74	3.0	501		53	235	
	13.5			0.08	1.50	1.50	97	75	3.0	502				
	7.6			0.07	1.31	1.30	100	77	2.5	508		53	250	
W	2.4	1314	044.489	0.02	0.38	0.40	95	79	2.0	511				
N	40.6	1320	044.489	0.10	1.88	1.90	90	79	3.5	541		58	250	
	28.5			0.09	1.88	1.90	96	79	3.5	510				
	20.2			0.09	1.69	1.70	101	79	3.5	502		56	240	
	13.5			0.09	1.69	1.70	101	79	3.5	502				Estimates:
	7.6			0.06	1.13	1.10	101	80	2.5	504				MW= 28.0
N	2.4	1350	064.332	0.01	0.19	0.20	95	80	2.0	508				%H2O=13.6

SYSTEM LEAK CHECK

	Vacuum (in. Hg)	DGM Rate (cfm)
Before	5.0	0.013
After	5.0	0.007

PITOT LEAK CHECK 15 sec

	Positive	Negative
Before	OK	OK
After		

GAS	1	2
CO2	13.5	13.5
O2	3.0	3.0
CO		
N2		

Impinger No.	Impinger Contents	Final	Initial	Difference
1.	100 mL DI H2O	718.6	568.8	149.8
2.	100 mL DI H2O	593.6	562.6	31.0
3.	Empty	468.9	465.8	3.1
4.	Silica Gel	687.0	672.3	14.7
5.				

#9 Battery



AQE 6/92

KEYSTONE ENVIRONMENTAL RESOURCES / AIR QUALITY ENGINEERING
STACK SAMPLING DATA SHEET

CLIENT USS Clairton Works	TEST DATE 10-~~8~~9-92	ORIFICE CORRECTION (ΔH@) 1.985	HOT/COLD BOX NO. 8
TEST UNIT #9 Battery Stack	TEST NO. CLR-9BS-3	METER CORRECTION (Y) 0.9617	PROBE NO. 10-1
PROJECT NO. 60504B-01	NOZZLE (SIZE,#) 0.435	CALIBRATION DATE 5-20-92	FILTER NO. 938
TEST CREW MV, RC, & OB	STATIC PRESSURE -1.0	PITOT CORRECTION 0.84	STACK DIA. 114"
BAROMETRIC PRESSURE 29.20	PORT DIRECTION E	CONTROL BOX NO. 6	PORT SIZE 4" Bolted Flange

	Traverse Point (inches)	Time	Dry Gas Meter Reading (dcf)	Pitot ΔP (in. H2O)	Orifice ΔH Required (in. H2O)	Orifice ΔH Actual (in. H2O)	Meter Temperature In (°F)	Meter Temperature Out (°F)	Vacuum (in. Hg)	Stack Temp. (°F)	Probe Temp. (°F)	Impinger Temp. (°F)	Hot Box Temp. (°F)	Comments
E	40.6	1358	064.332	0.09	1.69	1.70	85~~7~~9	79	4.5	504		55	250	5 min./point
	28.5			0.08	1.50	1.50	97	79	3.0	521				
	20.2			0.08	1.50	1.50	99	79	3.0	525				
	13.5			0.07	1.31	1.30	101	80	3.0	527		57	235	
	7.6			0.07	1.31	1.30	102	81	3.0	521				
E	2.4	1428	085.213	0.07	1.31	1.30	104	82	3.0	518		58	230	

Estimates:
MW= 28.0
%H2O= 13.6

SYSTEM LEAK CHECK

	Vacuum (in. Hg)	DGM Rate (cfm)
Before		
After		

PITOT LEAK CHECK

	Positive	Negative
Before		
After		

GAS	1	2
CO2		
O2		
CO		
N2		

Impinger No.	Impinger Contents	Final	Initial	Difference
1.	100mL DI H_2O			
2.	100 mL DI H_2O			
3.	Empty			
4.	Silica Gel			
5.				

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

APPENDIX E

EMISSIONS CALCULATIONS

KEYSTONE
ENVIRONMENTAL RESOURCES, INC

KEYSTONE ENVIRONMENTAL RESOURCES
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA
#9 Battery Stack

DATE: 10-8-92
CHARGE #: ...150-605048
TEST #: CLR-BS9-1

1. EMISSION RESULTS

PARAMETER	GR/SCFD	LB/HR
PARTICULATE	.00366	1.31090

---

2. STACK CONDITIONS

FLOW (ACFM)	84901.
(SCFM)	45665.
MOISTURE CONTENT (%)	8.57
STACK TEMPERATURE (F)	500.5

---

3. SAMPLING CONDITIONS

SAMPLE TIME (MIN.)	120.0
SCFD GAS SAMPLED	74.838
PERCENT ISOKINETIC	102.58

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA — #9 Battery Stack
CLR-BS9-1 — 10-8-92

FIELD DATA AND VELOCITY CALCULATIONS

POINT	TIME	METER READING (DRY) CF	DELTA P IN.H2O	ORIFICE DELTA H REQ	ORIFICE DELTA H ACT	METER TEMP DEG F IN	METER TEMP DEG F OUT	VACUUM IN.HG.	STACK TEMP DEG F	CORRECTED VELOCITY FT/SEC
40.6S	853.0	847.818	.110	1.97	2.00	47.	48.	5.0	490.	25.4
28.5			.100	1.79	1.80	69.	49.	5.0	490.	24.3
20.2			.100	1.79	1.80	75.	52.	5.0	499.	24.4
13.5			.080	1.48	1.50	81.	51.	4.0	509.	21.9
7.6			.060	1.11	1.10	81.	57.	3.5	498.	18.9
2.4	923.0	867.891	.020	.37	.35	79.	59.	2.5	497.	10.9
40.6W	933.0	867.891	.090	1.66	1.65	77.	60.	4.0	490.	23.0
28.5			.080	1.48	1.50	82.	61.	4.0	499.	21.8
20.2			.080	1.48	1.50	84.	62.	4.0	501.	21.8
13.5			.060	1.10	1.10	85.	64.	3.5	500.	18.9
7.6			.070	1.29	1.30	89.	65.	4.0	496.	20.4
2.4	1003.0	887.062	.010	.18	.20	83.	69.	2.5	501.	7.7
40.6N	1010.0	887.062	.090	1.66	1.65	80.	67.	4.5	505.	23.2
28.5			.090	1.66	1.65	89.	69.	4.0	519.	23.4
20.2			.120	2.21	2.20	92.	69.	5.0	506.	26.8
13.5			.080	1.48	1.50	90.	70.	4.0	503.	21.9
7.6			.010	.18	.20	85.	70.	2.5	495.	7.7
2.4	1040.0	906.629	.010	.18	.20	86.	70.	2.5	501.	7.7
40.6E	1048.0	906.629	.100	1.84	1.85	83.	70.	4.5	505.	24.5
28.5			.100	1.84	1.85	91.	70.	4.5	521.	24.7
20.2			.090	1.66	1.65	95.	71.	4.0	491.	23.0
13.5			.080	1.48	1.50	95.	73.	4.5	495.	21.8
7.6			.080	1.48	1.50	99.	74.	4.0	497.	21.8
2.4	1118.0	927.743	.030	.55	.55	95.	75.	3.0	505.	13.4

O R S A T

CO2	4.3
O2	13.5
CO	.0
N	82.2

IMPINGER NO.	1	95.8
	2	32.8
	3	3.8
	4	.0
ABSORBED H2O		16.3

CONTROL BOX CALIBRATIONS

	FACTOR	DATE
ORIFICE	1.985	5-20-92
METER	0.9617	5-20-92
PITOT	0.84	9-10-92

LEAK CHECK

	RATE	IN.HG
INITIAL	0.015 CFM	5.0
FINAL	0.006 CFM	5.0

CONTROL BOX NO. 6 PROBE NO. 10-1 NOZZLE NO. NA

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-BS9-1 10-8-92

STACK SAMPLING CALCULATIONS

A.	BAROMETRIC PRESSURE IN. HG.....	29.35
B.	AVG. DELTA H (IN H2O).....	1.34
C.	METER PRESSURE (IN. HG.).....	29.45
D.	STATIC PRESSURE (IN. H2O).....	-1.00
E.	STATIC PRESSURE (IN. HG.).....	-.074
F.	STACK PRESSURE (IN. HG.) (A+E).....	29.28
G.	STACK DIAMETER (IN.).....	114.00
H.	STACK AREA (SQ. FT.).....	70.88
	NOZZLE DIAMETER.....	.4350
I.	NOZZLE AREA (SQ. FT.).....	.001032
J.	AVG. STACK TEMP (DEG. R.).....	960.5
K.	AVG. METER TEMP (DEG. R.).....	534.1
L.	CONDENSATE VOL. (ML).....	132.4
M.	ABSORBED H2O (ML).....	16.3
N.	TOTAL H2O (ML).....	148.7
O.	METERED GAS (CF).....	79.925
P.	GAS METER CORRECTION.....	.9617
Q.	CORRECTED METERED GAS (CF).....	76.864
R.	H2O GAS VOLUME (CF) (0.00267N(K/C).....	7.201
S.	TOTAL SAMPLED VOLUME (CF) (Q+R).....	84.065
T.	PERCENT H2O (100R/S).....	8.57
	THEORETICAL MAXIMUM.....	100.00
	PERCENT WATER USED.....	8.57
U.	SCFD GAS SAMPLED (528*Q*C/(29.9*K)).....	74.838

V. MOLECULAR WEIGHT OF STACK GAS

COMPONENT	ORSAT-DRY VOL.PCT./100	X	MOISTURE CORRECTION (1-T/100)	X	MOLECULAR WEIGHT	=	WEIGHT PER MOLE
CO2	.043	X	.9143	X	44.0	=	1.73
CO	.000	X	.9143	X	28.0	=	.00
O2	.135	X	.9143	X	32.0	=	3.95
N2	.822	X	.9143	X	28.2	=	21.19
H2O		X	T/100= .0857	X	18.0	=	1.54
					MOLECULAR WEIGHT OF STACK GAS	=	28.42

W.	PITOT CORRECTION.....	.840
X.	AVERAGE CORRECTED VELOCITY (FPS).....	19.96
	[85.49*W*SQRT{(J*DELTA P)/(V*F)}]	
Y.	AVG. FLOW RATE (CFM) (X*H*60).....	84901.
Z.	STACK FLOW RATE (SCFM) (528*Y/J*F/29.92).....	45665.
	STACK FLOW RATE (DRY).....	41754.
AA.	SAMPLE TIME (SEC).....	7200.
BB.	PERCENT ISOKINETIC.....	102.58
	(J*100*U*29.92)/(528*X*AA*I*F*(1-T/100))	

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-BS9-1 10-8-92

PARAMETER	CYCLONE WT. (G)	MATL.ON FILTER(G)	INSOL.MATL. IN PROBE(G)	SOL.MATL. IN PROBE(G)
PARTICULATE	.00000	.00930	.00000	.00850

PARAMETER	INSOL.MATL. IN IMP.(G)	SOLUBLE MATL. IN IMP.(G)
PARTICULATE	.00000	.00000

PARTICULATE	.01780
ALL MATLS.	.01780

PARAMETER	GR/SCFD	LB/HR
PARTICULATE	.00366	1.31090

Emission rates are based on EPA Method 5. DEB 11-2-92

KEYSTONE ENVIRONMENTAL RESOURCES
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA
#9 Battery Stack

DATE: 10-8-92
CHARGE #: ...150-605048
TEST #: CLR-BS9-2

1. EMISSION RESULTS

PARAMETER	GR/SCFD	LB/HR
PARTICULATE	.00637	2.20626

---

2. STACK CONDITIONS

FLOW (ACFM)	83379.
(SCFM)	45511.
MOISTURE CONTENT (%)	11.23
STACK TEMPERATURE (F)	483.3

---

3. SAMPLING CONDITIONS

SAMPLE TIME (MIN.)	120.0
SCFD GAS SAMPLED	69.612
PERCENT ISOKINETIC	98.62

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-BS9-2 10-8-92

FIELD DATA AND VELOCITY CALCULATIONS

POINT	TIME	METER READING (DRY) CF	DELTA P IN.H2O	ORIFICE DELTA H REQ	ORIFICE DELTA H ACT	METER TEMP DEG F IN	METER TEMP DEG F OUT	VACUUM IN.HG.	STACK TEMP DEG F	CORRECTED VELOCITY FT/SEC
40.6E	1504.0	928.410	.070	1.29	1.30	84.	79.	3.0	476.	19.9
28.5			.060	1.11	1.10	94.	79.	2.5	486.	18.6
20.2			.060	1.11	1.10	102.	82.	2.5	490.	18.6
13.5			.050	.92	.90	105.	84.	2.0	446.	16.6
7.6			.070	1.29	1.30	109.	87.	3.0	481.	20.0
2.4	1534.0	946.651	.060	1.11	1.10	111.	89.	2.5	492.	18.6
40.6N	1546.0	946.651	.070	1.29	1.30	93.	85.	3.0	490.	20.1
28.5			.070	1.29	1.30	105.	85.	3.0	499.	20.2
20.2			.060	1.11	1.10	109.	87.	2.5	471.	18.4
13.5			.050	.92	.92	109.	87.	2.5	469.	16.8
7.6			.060	1.11	1.10	111.	90.	2.5	480.	18.5
2.4	1616.0	964.695	.010	.18	.20	105.	91.	2.0	487.	7.6
40.6W	1625.0	964.695	.080	1.48	1.50	89.	89.	3.5	491.	21.5
28.5			.080	1.48	1.50	111.	91.	3.5	470.	21.3
20.2			.070	1.29	1.30	114.	93.	3.0	482.	20.0
13.5			.060	1.11	1.10	115.	94.	3.0	487.	18.6
7.6			.100	1.84	1.85	117.	94.	4.0	467.	23.7
2.4	1655.0	985.487	.080	1.48	1.50	118.	95.	3.5	481.	21.4
40.6S	1702.0	985.487	.080	1.48	1.50	99.	94.	3.5	494.	21.5
28.5			.090	1.66	1.65	110.	94.	3.5	497.	22.9
20.2			.080	1.48	1.50	113.	93.	3.0	502.	21.6
13.5			.060	1.11	1.10	114.	94.	3.5	485.	18.6
7.6			.090	1.66	1.65	115.	94.	3.5	485.	22.7
2.4	1732.0	1006.381	.090	1.66	1.65	115.	95.	4.0	491.	22.8

O R S A T

CO2	13.8
O2	3.0
CO	.0
N	83.2

IMPINGER NO.	1	140.4
	2	28.7
	3	3.2
	4	.0
ABSORBED H2O		14.5

CONTROL BOX CALIBRATIONS

	FACTOR	DATE
ORIFICE	1.985	5-20-92
METER	0.9617	5-20-92
PITOT	0.84	9-10-92

LEAK CHECK

	RATE	IN.HG
INITIAL	0.018 CFM	5.0
FINAL	0.010 CFM	5.0

CONTROL BOX NO. 6 PROBE NO. 10-2 NOZZLE NO. NA

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-BS9-2 10-8-92

STACK SAMPLING CALCULATIONS

A.	BAROMETRIC PRESSURE IN. HG.....	29.25
B.	AVG. DELTA H (IN H2O).....	1.27
C.	METER PRESSURE (IN. HG.).....	29.34
D.	STATIC PRESSURE (IN. H2O).....	-1.00
E.	STATIC PRESSURE (IN. HG.).....	-.074
F.	STACK PRESSURE (IN. HG.) (A+E).....	29.18
G.	STACK DIAMETER (IN.).....	114.00
H.	STACK AREA (SQ. FT.).....	70.88
	NOZZLE DIAMETER.....	.4350
I.	NOZZLE AREA (SQ. FT.).....	.001032
J.	AVG. STACK TEMP (DEG. R.).....	943.3
K.	AVG. METER TEMP (DEG. R.).....	558.2
L.	CONDENSATE VOL. (ML).....	172.3
M.	ABSORBED H2O (ML).....	14.5
N.	TOTAL H2O (ML).....	186.8
O.	METERED GAS (CF).....	77.971
P.	GAS METER CORRECTION.....	.9617
Q.	CORRECTED METERED GAS (CF).....	74.985
R.	H2O GAS VOLUME (CF) (0.00267N(K/C).....	9.487
S.	TOTAL SAMPLED VOLUME (CF) (Q+R).....	84.472
T.	PERCENT H2O (100R/S).....	11.23
	THEORETICAL MAXIMUM.....	100.00
	PERCENT WATER USED.....	11.23
U.	SCFD GAS SAMPLED (528*Q*C/(29.9*K)).....	69.612

V. MOLECULAR WEIGHT OF STACK GAS

COMPONENT	ORSAT-DRY VOL.PCT./100	X	MOISTURE CORRECTION (1-T/100)	X	MOLECULAR WEIGHT	=	WEIGHT PER MOLE
CO2	.138	X	.8877	X	44.0	=	5.39
CO	.000	X	.8877	X	28.0	=	.00
O2	.030	X	.8877	X	32.0	=	.85
N2	.832	X	.8877	X	28.2	=	20.83
H2O		X	T/100= .1123	X	18.0	=	2.02
					MOLECULAR WEIGHT OF STACK GAS	=	29.09

W.	PITOT CORRECTION.....	.840
X.	AVERAGE CORRECTED VELOCITY (FPS).....	19.61
	[85.49*W*SQRT{(J*DELTA P)/(V*F)}]	
Y.	AVG. FLOW RATE (CFM) (X*H*60).....	83379.
Z.	STACK FLOW RATE (SCFM) (528*Y/J*F/29.92).....	45511.
	STACK FLOW RATE (DRY).....	40399.
AA.	SAMPLE TIME (SEC).....	7200.
BB.	PERCENT ISOKINETIC.....	98.62
	(J*100*U*29.92)/(528*X*AA*I*F*(1-T/100))	

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-BS9-2 10-8-92

PARAMETER	CYCLONE WT. (G)	MATL.ON FILTER(G)	INSOL.MATL. IN PROBE(G)	SOL.MATL. IN PROBE(G)
PARTICULATE	.00000	.01430	.00000	.01450

PARAMETER	INSOL.MATL. IN IMP.(G)	SOLUBLE MATL. IN IMP.(G)
PARTICULATE	.00000	.00000
PARTICULATE	.02880	
ALL MATLS.	.02880	

PARAMETER	GR/SCFD	LB/HR
PARTICULATE	.00637	2.20626

Emission rates are based on EPA Method 5. DEB 11-2-92

KEYSTONE ENVIRONMENTAL RESOURCES
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA
#9 Battery Stack

DATE: 10-9-92
CHARGE #: ...150-605048
TEST #: CLR-9BS-3

1. EMISSION RESULTS

PARAMETER	GR/SCFD	LB/HR
PARTICULATE	.00547	1.85808

---

2. STACK CONDITIONS

FLOW (ACFM)	84887.
(SCFM)	44766.
MOISTURE CONTENT (%)	11.55
STACK TEMPERATURE (F)	514.7

---

3. SAMPLING CONDITIONS

SAMPLE TIME (MIN.)	120.0
SCFD GAS SAMPLED	71.731
PERCENT ISOKINETIC	103.68

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-9BS-3 10-9-92

FIELD DATA AND VELOCITY CALCULATIONS

POINT	TIME	METER READING (DRY) CF	DELTA P IN.H2O	ORIFICE DELTA H REQ	ORIFICE DELTA H ACT	METER TEMP DEG F IN	METER TEMP DEG F OUT	VACUUM IN.HG.	STACK TEMP DEG F	CORRECTED VELOCITY FT/SEC
40.6S	1208.0	6.673	.090	1.66	1.65	71.	65.	3.0	523.	23.2
28.5			.080	1.48	1.50	79.	65.	3.0	529.	22.0
20.2			.070	1.29	1.30	89.	67.	3.0	535.	20.6
13.5			.060	1.11	1.10	91.	69.	2.5	515.	18.9
7.6			.060	1.11	1.10	94.	71.	2.5	509.	18.8
2.4	1238.0	25.064	.010	.18	.20	95.	73.	2.0	511.	7.7
40.6W	1244.0	25.064	.090	1.66	1.65	82.	73.	3.5	505.	23.0
28.5			.080	1.48	1.50	92.	73.	3.0	520.	21.9
20.2			.070	1.31	1.30	95.	74.	3.0	501.	20.3
13.5			.080	1.50	1.50	97.	75.	3.0	502.	21.7
7.6			.070	1.31	1.30	100.	77.	2.5	508.	20.3
2.4	1314.0	44.489	.020	.38	.40	95.	79.	2.0	511.	10.9
40.6N	1320.0	44.489	.100	1.88	1.90	90.	79.	3.5	541.	24.7
28.5			.100	1.88	1.90	96.	79.	3.5	510.	24.3
20.2			.090	1.69	1.70	101.	79.	3.5	502.	23.0
13.5			.090	1.69	1.70	101.	79.	3.5	502.	23.0
7.6			.060	1.13	1.10	101.	80.	2.5	504.	18.8
2.4	1350.0	64.332	.010	.19	.20	95.	80.	2.0	508.	7.7
40.6E	1358.0	64.332	.090	1.69	1.70	85.	79.	4.5	504.	23.0
28.5			.080	1.50	1.50	97.	79.	3.0	521.	21.9
20.2			.080	1.69	1.70	99.	79.	3.0	525.	21.9
13.5			.070	1.31	1.30	101.	80.	3.0	527.	20.5
7.6			.070	1.31	1.30	102.	81.	3.0	521.	20.5
2.4	1428.0	85.213	.070	1.31	1.30	104.	82.	3.0	518.	20.4

O R S A T

CO2	13.5
O2	3.0
CO	.0
N	83.5

IMPINGER NO.	1	149.8
	2	31.0
	3	3.1
	4	.0
ABSORBED H2O		14.7

CONTROL BOX CALIBRATIONS

	FACTOR	DATE
ORIFICE	1.985	5-20-92
METER	0.9617	5-20-92
PITOT	0.84	9-10-92

LEAK CHECK

	RATE	IN.HG
INITIAL	0.013 CFM	5.0
FINAL	0.007 CFM	5.0

CONTROL BOX NO. 6 PROBE NO. 10-1 NOZZLE NO. NA

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-9BS-3 10-9-92

STACK SAMPLING CALCULATIONS

A.	BAROMETRIC PRESSURE IN. HG.....	29.20
B.	AVG. DELTA H (IN H2O).....	1.33
C.	METER PRESSURE (IN. HG.).....	29.30
D.	STATIC PRESSURE (IN. H2O).....	-1.00
E.	STATIC PRESSURE (IN. HG.).....	-.074
F.	STACK PRESSURE (IN. HG.) (A+E).....	29.13
G.	STACK DIAMETER (IN.).....	114.00
H.	STACK AREA (SQ. FT.).....	70.88
	NOZZLE DIAMETER.....	.4350
I.	NOZZLE AREA (SQ. FT.).....	.001032
J.	AVG. STACK TEMP (DEG. R.).....	974.7
K.	AVG. METER TEMP (DEG. R.).....	544.8
L.	CONDENSATE VOL. (ML).....	183.9
M.	ABSORBED H2O (ML).....	14.7
N.	TOTAL H2O (ML).....	198.6
O.	METERED GAS (CF).....	78.540
P.	GAS METER CORRECTION.....	.9617
Q.	CORRECTED METERED GAS (CF).....	75.532
R.	H2O GAS VOLUME (CF) (0.00267N(K/C).....	9.860
S.	TOTAL SAMPLED VOLUME (CF) (Q+R).....	85.392
T.	PERCENT H2O (100R/S).....	11.55
	THEORETICAL MAXIMUM.....	100.00
	PERCENT WATER USED.....	11.55
U.	SCFD GAS SAMPLED (528*Q*C/(29.9*K)).....	71.731

V. MOLECULAR WEIGHT OF STACK GAS

COMPONENT	ORSAT-DRY VOL.PCT./100	X	MOISTURE CORRECTION (1-T/100)	X	MOLECULAR WEIGHT	=	WEIGHT PER MOLE
CO2	.135	X	.8845	X	44.0	=	5.25
CO	.000	X	.8845	X	28.0	=	.00
O2	.030	X	.8845	X	32.0	=	.85
N2	.835	X	.8845	X	28.2	=	20.83
H2O		X	T/100= .1155	X	18.0	=	2.08
					MOLECULAR WEIGHT OF STACK GAS	=	29.01

W.	PITOT CORRECTION.....	.840
X.	AVERAGE CORRECTED VELOCITY (FPS).....	19.96
	[85.49*W*SQRT{(J*DELTA P)/(V*F)}]	
Y.	AVG. FLOW RATE (CFM) (X*H*60).....	84887.
Z.	STACK FLOW RATE (SCFM) (528*Y/J*F/29.92).....	44766.
	STACK FLOW RATE (DRY).....	39597.
AA.	SAMPLE TIME (SEC).....	7200.
BB.	PERCENT ISOKINETIC.....	103.68
	(J*100*U*29.92)/(528*X*AA*I*F*(1-T/100))	

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

USS CLAIRTON WORKS
Clairton, PA #9 Battery Stack
CLR-9BS-3 10-9-92

PARAMETER	CYCLONE WT. (G)	MATL.ON FILTER(G)	INSOL.MATL. IN PROBE(G)	SOL.MATL. IN PROBE(G)
PARTICULATE	.00000	.01890	.00000	.00660

PARAMETER	INSOL.MATL. IN IMP.(G)	SOLUBLE MATL. IN IMP.(G)
PARTICULATE	.00000	.00000
PARTICULATE	.02550	
ALL MATLS.	.02550	

PARAMETER	GR/SCFD	LB/HR
PARTICULATE	.00547	1.85808

Emission rates are based on EPA Method 5. DEB 11-2-92

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

APPENDIX F

ANALYTICAL RESULTS

KEYSTONE
ENVIRONMENTAL RESOURCES, INC

KEYSTONE ENVIRONMENTAL RESOURCES, INC.
AIR QUALITY ENGINEERING

ANALYTICAL REPORTING FORM

CLIENT: USS CLAIRTON
PLANT LOCATION:
PROJECT NUMBER: 605048-01
UNIT TESTED: #9 BATTERY STACK

TEST DATE: 10/8/92 & 10/9/92
DATE RECEIVED: 10/8/92 & 10/9/92
DATE ANALYZED:
ANALYTICAL METHOD: EPA M5

Test Number	Component	Cyclone Weight Units ( )	Filter Weight Units (gm)	Insoluble Portion of Front Half Units ( )	0.22μ Filter Insoluble Portion of Back Half Units ( )	Soluble Portion of Back Half Units ( )	Soluble Portion of Front Half Units (gm)	Chloroform/ Ethyl Ether Extract Units ( )
CLR-9BS-1	PART.		0.0093				0.0085	
CLR-9BS-2	↓		0.0143				0.0145	
CLR-9BS-3			0.0189				0.0066	
CLR-9BS-BLK			—				0.0000	

Extraction Method
Solvent

Analyst's Signature
Date

Comments

COMPLIANCE DEMONSTRATION
#9 BATTERY COMBUSTION STACK

USS CLAIRTON WORKS
CLAIRTON, PA

APPENDIX G

VISIBLE EMISSIONS DATA

KEYSTONE
ENVIRONMENTAL RESOURCES, INC

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 STACK TESTING

OBSERVER: James E. McKay

DATE: 8 October, 1992

FACILITY: USX Clairton works

OBSERVATION: START TIME: 8:45

END TIME: 9:45

OBSERVATION POINT: Wabash Bath House Lot #9

SOURCE: Battery Draft Stack

DISTANCE: @ 625 ft

DIRECTION FROM: N-W of "

HEIGHT: @ 200 ft

WIND:

SPEED: 5 m.p.h

DIRECTION: → East

TEMPERATURE: 44°

SKY CONDITION: Hazy &

BACKGROUND: Sky & FOG

READING CONDITIONS: Poor-Fair

COLOR OF EMISSION: N/A

TOTAL No. OF READINGS: 240

No. READINGS >= 20% 0

No. READINGS >= 60% 0

GREATEST OPACITY: 0

CREW: B FOREMAN: McCarkle

COMMENTS:

S. Start	0	0	0	0	0	:15	30	0	0	0	0
	1	0	0	0	0		31	0	0	0	0
	2	0	0	0	0		32	0	0	0	0
	3	0	0	0	0		33	0	0	0	0
	4	0	0	0	0	Stopped	34	0	0	0	0
:30	5	0	0	0	0	:20	35	0	0	0	0
	6	0	0	0	0		36	0	0	0	0
	7	0	0	0	0		37	0	0	0	0
	8	0	0	0	0		38	0	0	0	0
	9	0	0	0	0		39	0	0	0	0
:55	10	0	0	0	0	:25	40	0	0	0	0
	11	0	0	0	0		41	0	0	0	0
	12	0	0	0	0		42	0	0	0	0
	13	0	0	0	0		43	0	0	0	0
	14	0	0	0	0	Start W	44	0	0	0	0
9:00	15	0	0	0	0	:30	45	0	0	0	0
	16	0	0	0	0		46	0	0	0	0
	17	0	0	0	0		47	0	0	0	0
	18	0	0	0	0		48	0	0	0	0
	19	0	0	0	0		49	0	0	0	0
:05	20	0	0	0	0	:35	50	0	0	0	0
	21	0	0	0	0		51	0	0	0	0
	22	0	0	0	0		52	0	0	0	0
	23	0	0	0	0		53	0	0	0	0
	24	0	0	0	0		54	0	0	0	0
:10	25	0	0	0	0	:40	55	0	0	0	0
	26	0	0	0	0		56	0	0	0	0
	27	0	0	0	0		57	0	0	0	0
	28	0	0	0	0		58	0	0	0	0
	29	0	0	0	0		59	0	0	0	0

VISIBLE EMISSIONS OBSERVATIONS FORM

Testing
#9 STACK

OBSERVER: James E. McKay

DATE: 8 October 1992

FACILITY: USX Clairton Works

OBSERVATION: START TIME: 9:45
END TIME: 10:45

OBSERVATION POINT:
Wabash Bath House Lot
#9

SOURCE: Battery Draft Stack

DISTANCE: @ 625 ft
DIRECTION FROM: N.W. of
HEIGHT: @ 200 ft

WIND:

SPEED: 6 m.p.H
DIRECTION: > S.E
TEMPERATURE: 48°
SKY CONDITION: Haze
BACKGROUND: Sky

READING CONDITIONS: Rain
COLOR OF EMISSION: Black

TOTAL No. OF READINGS: 240
No. READINGS >= 20% 0
No. READINGS >= 60% 0
GREATEST OPACITY: 5%
CREW: B FOREMAN: McCorkle

COMMENTS:

	0	0	0	0	0	:15	30	0	0	0	0
	1	0	0	0	0		31	0	0	0	0
	2	0	0	0	0		32	0	0	0	0
	3	0	0	0	0		33	0	0	0	0
	4	0	0	0	0		34	0	0	0	0
:50	5	0	0	0	0	:20	35	0	0	0	0
	6	0	0	0	0		36	0	0	0	0
	7	0	0	5	5		37	0	0	0	0
	8	5	5	5	5		38	0	0	0	0
	9	5	5	5	5		39	0	0	0	0
:55	10	5	5	5	5	:25	40	0	0	0	0
	11	5	5	0	0		41	0	0	0	0
	12	0	0	0	0		42	0	0	0	0
	13	0	0	0	0		43	0	0	0	0
	14	0	0	0	0		44	0	0	0	0
Stop	15	0	0	0	0	:30	45	0	0	0	0
	16	0	0	0	0		46	0	0	0	0
	17	0	0	0	0		47	0	0	0	0
	18	0	0	0	0		48	0	0	0	0
	19	0	0	0	0		49	0	0	0	0
:05	20	0	0	0	0	:35	50	0	0	0	0
	21	0	0	0	0		51	0	0	0	0
Start	22	0	0	0	0		52	0	0	0	0
	23	0	0	0	0	Stop	53	0	0	0	0
	24	0	0	0	0		54	0	0	0	0
:10	25	0	0	0	0	:40	55	0	0	0	0
	26	0	0	0	0		56	0	0	0	0
	27	0	0	0	0		57	0	0	0	0
	28	0	0	0	0	Start	58	0	0	0	0
	29	0	0	0	0		59	0	0	0	0

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 Testing STACK

OBSERVER: James E. McKay

DATE: 8 October 1992

FACILITY: USX Clairton Works

OBSERVATION: START TIME: 10:45

END TIME: 11:45

OBSERVATION POINT: Wabash Bath House Lot #9

SOURCE: Battery Draft Stack

DISTANCE: @ 625 Ft

DIRECTION FROM: N-W of "

HEIGHT: @ 200 Ft

WIND:

SPEED: 8-m-p-h

DIRECTION: → S-E

TEMPERATURE: 54°

SKY CONDITION: CLEAR

BACKGROUND: SKY

READING CONDITIONS: Fair

COLOR OF EMISSION: N/A

TOTAL No. OF READINGS: 240

No. READINGS >= 20% 0

No. READINGS >= 60% 0

GREATEST OPACITY: 0

CREW: B FOREMAN: McCarkle

COMMENTS:

	0	0	0	0	0	:15	30	0	0	0	0
	1	0	0	0	0		31	0	0	0	0
	2	0	0	0	0		32	0	0	0	0
	3	0	0	0	0		33	0	0	0	0
	4	0	0	0	0		34	0	0	0	0
:50	5	0	0	0	0	:20	35	0	0	0	0
	6	0	0	0	0		36	0	0	0	0
	7	0	0	0	0		37	0	0	0	0
	8	0	0	0	0		38	0	0	0	0
	9	0	0	0	0		39	0	0	0	0
:55	10	0	0	0	0	:25	40	0	0	0	0
	11	0	0	0	0		41	0	0	0	0
	12	0	0	0	0		42	0	0	0	0
	13	0	0	0	0		43	0	0	0	0
	14	0	0	0	0		44	0	0	0	0
11:00	15	0	0	0	0	:30	45	0	0	0	0
	16	0	0	0	0		46	0	0	0	0
	17	0	0	0	0		47	0	0	0	0
	18	0	0	0	0		48	0	0	0	0
	19	0	0	0	0		49	0	0	0	0
:05	20	0	0	0	0	:35	50	0	0	0	0
	21	0	0	0	0		51	0	0	0	0
	22	0	0	0	0		52	0	0	0	0
	23	0	0	0	0		53	0	0	0	0
	24	0	0	0	0		54	0	0	0	0
:10	25	0	0	0	0	:40	55	0	0	0	0
	26	0	0	0	0		56	0	0	0	0
	27	0	0	0	0		57	0	0	0	0
	28	0	0	0	0		58	0	0	0	0
	29	0	0	0	0		59	0	0	0	0

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 Testing STACK

OBSERVER: James Emikey

DATE: 8 October 1992

FACILITY: USX Clanton Works

OBSERVATION: START TIME: 3:05

END TIME: 4:05

OBSERVATION POINT: Wabash Bath House Lot #9

SOURCE: Battery Draft Stack

DISTANCE: @ 625 Ft

DIRECTION FROM: N-W of

HEIGHT: @ 200 Ft

WIND:

SPEED: 14-M-P-H

DIRECTION: → S-E

TEMPERATURE: 71°

SKY CONDITION: Scattered Clds

BACKGROUND: Sky

READING CONDITIONS: Fair

COLOR OF EMISSION: Black

TOTAL No. OF READINGS: 240

No. READINGS >= 20% 0

No. READINGS >= 60% 0

GREATEST OPACITY: 5%

CREW: B FOREMAN: McCorkle

COMMENTS:

E Start	0	0	0	0	0	:35	30	0	0	0	0
	1	0	0	0	0		31	0	0	0	0
	2	0	0	0	0		32	0	0	0	0
	3	0	0	0	0		33	0	0	0	0
	4	0	0	0	0		34	0	0	0	0
:10	5	0	0	0	0	:40	35	0	0	0	0
	6	0	0	0	0		36	0	0	0	0
	7	0	0	0	0		37	0	5	5	5
	8	0	0	0	0	Start N	38	5	5	5	5
	9	0	0	0	0		39	0	0	0	0
:15	10	0	0	0	0	:45	40	0	0	0	0
	11	0	0	0	0		41	0	0	0	0
	12	0	0	0	0		42	0	0	0	0
	13	0	0	0	0		43	0	0	0	0
	14	0	0	0	0		44	0	0	0	0
:20	15	0	0	0	0	:50	45	0	0	0	0
	16	0	0	0	0		46	0	0	0	0
	17	0	0	0	0		47	0	0	0	0
	18	0	0	0	0		48	0	0	0	0
	19	0	0	0	0		49	0	0	0	0
:25	20	0	0	0	0	:55	50	0	0	0	0
	21	0	0	0	0		51	0	0	0	0
	22	0	0	0	0		52	0	0	0	0
	23	0	0	0	0		53	0	0	0	0
	24	0	0	0	0		54	0	0	0	0
:30	25	0	0	0	0	:00	55	0	0	0	0
	26	0	0	0	0		56	0	0	0	0
Stopped E	27	0	0	0	0		57	0	0	0	0
	28	0	0	0	0		58	0	0	0	0
	29	0	0	0	0		59	0	0	0	0

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 TESTING STACK

OBSERVER: James E. McKay

DATE: 8 October 1992

FACILITY: US & Clanton Wells

OBSERVATION: START TIME: 4:05

END TIME: 5:05

OBSERVATION POINT: Wabash Bath House Lot #9

SOURCE: Battery Draft Stack N

DISTANCE: @ 625 Ft

DIRECTION FROM: N-wd

HEIGHT: @ 200 Ft

WIND:

SPEED: 10 m.p.h

DIRECTION: → S-E

TEMPERATURE: 71°

SKY CONDITION: CLEAR

BACKGROUND: Sky

READING CONDITIONS: Fair

COLOR OF EMISSION: Black

TOTAL No. OF READINGS: 240

No. READINGS >= 20% 0

No. READINGS >= 60% 0

GREATEST OPACITY: 10%

CREW: [illegible] FOREMAN: McCaskle

COMMENTS:

	0	0	0	0	0	:35	30	0	0	0	0
	1	0	0	0	0		31	0	0	0	0
	2	0	0	0	0		32	0	0	0	0
	3	0	0	0	0		33	0	0	0	0
	4	0	0	0	0		34	0	0	0	0
:10	5	0	0	0	0	:40	35	0	0	0	0
	6	0	5	10	10		36	0	0	0	0
	7	10	10	5	5		37	0	0	0	0
	8	5	5	5	5	N Stopp	38	0	0	0	0
	9	5	5	5	5		39	0	0	0	0
:15	10	0	0	0	0	:45	40	0	0	0	0
	11	0	0	0	0		41	0	0	0	0
	12	0	0	0	0		42	0	0	0	0
	13	0	0	0	0		43	0	0	0	0
	14	0	0	0	0		44	0	0	0	0
:20	15	0	0	5	5	:50	45	0	0	0	0
	16	5	5	5	5		46	0	0	0	0
N Start	17	0	0	0	0	N Stopp	47	0	0	0	0
	18	0	0	0	0		48	0	0	0	0
	19	0	0	0	0		49	0	0	0	0
:25	20	0	0	0	0	:55	50	0	0	0	0
	21	0	0	0	0		51	0	0	0	0
	22	0	0	0	0		52	0	0	0	0
	23	0	0	0	0	S Start	53	0	0	0	0
	24	0	0	0	0		54	0	0	0	0
:30	25	0	0	0	0	:00	55	0	0	0	0
	26	0	0	5	5		56	0	0	0	0
	27	5	5	5	0		57	0	0	0	0
	28	0	0	0	0		58	0	0	0	0
	29	0	0	0	0		59	0	0	0	0

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 Testing STACK

OBSERVER: James E. McKay

DATE: 8 October 1992

FACILITY: PSC Clairton Works

OBSERVATION: START TIME: 5:05

END TIME: 5:35

OBSERVATION POINT: Walnut Bath House Lot #9

SOURCE: Battery Duff Stack

DISTANCE: @ 625 ft

DIRECTION FROM: 21-486"

HEIGHT: @ 200 ft

WIND:

SPEED: 10-12 MPH

DIRECTION: → S-E

TEMPERATURE: 71°

SKY CONDITION: CLEAR

BACKGROUND: Sky

READING CONDITIONS: Fair

COLOR OF EMISSION: Black

TOTAL No. OF READINGS: 120

No. READINGS >= 20% 5

No. READINGS >= 60% 0

GREATEST OPACITY: 25%

CREW: D FOREMAN: McCarthy

COMMENTS:

0	0	0	0	0	30					
1	0	0	0	0	31					
2	0	0	0	0	32					
3	0	0	0	0	33					
4	0	0	0	0	34					
5	0	0	0	0	35					
6	0	0	0	0	36					
7	0	0	0	0	37					
8	0	0	0	0	38					
9	0	0	0	0	39					
10	0	10	15	15	40					
11	15	20	20	20	41					
12	25	20	15	10	42					
13	10	10	5	0	43					
14	0	0	0	0	44					
15	0	0	0	0	45					
16	0	0	0	0	46					
17	0	0	0	0	47					
18	0	0	0	0	48					
19	0	0	0	0	49					
20	0	0	0	0	50					
21	0	0	0	0	51					
22	0	0	0	0	52					
23	0	0	0	0	53					
24	0	0	0	0	54					
25	0	0	0	0	55					
26	0	0	0	0	56					
27	0	0	0	0	57					
28	0	0	0	0	58					
29	0	0	0	0	59					

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 Testing STACK

OBSERVER: James E. McKoy

DATE: 9 October, 1992

FACILITY: US Clairton Works

OBSERVATION: START TIME: 1200 N

END TIME: 1300

OBSERVATION POINT: Wabash Bath House Lot #9

SOURCE: Battery Draft Stack

DISTANCE: @ 625 ft

DIRECTION FROM: N-W of "

HEIGHT: @ 200 ft

WIND:

SPEED: 12-M-P-H

DIRECTION: → S-W

TEMPERATURE: 75°

SKY CONDITION: Cloudy

BACKGROUND: SKY

READING CONDITIONS: Fair

COLOR OF EMISSION: Black

TOTAL No. OF READINGS: 240

No. READINGS >= 20% 0

No. READINGS >= 60% 0

GREATEST OPACITY: 5%

CREW: C FOREMAN: Hall

COMMENTS:

0	0	0	0	0		30	0	0	0	0
1	0	0	0	0		31	0	0	0	0
2	0	0	0	0		32	0	0	0	0
3	0	0	0	0		33	0	0	0	0
4	0	0	0	0	Start S	34	5	5	5	5
5	0	0	0	0		35	5	5	5	5
6	0	0	0	0	S Stopp	36	5	0	0	0
7	0	0	0	0		37	0	0	0	0
8	0	0	0	0		38	0	0	0	0
9	0	0	0	0		39	0	0	0	0
10	0	0	0	0		40	0	0	0	0
11	0	0	0	0	W Start	41	0	0	0	0
12	0	0	0	0		42	0	0	0	0
13	0	0	0	0		43	0	0	0	0
14	0	0	0	0		44	0	0	0	0
15	0	0	0	0		45	0	0	0	0
16	0	0	0	0		46	0	0	5	5
17	0	0	0	0		47	5	5	5	0
18	0	0	0	0		48	0	0	0	0
19	0	0	0	0		49	0	0	0	0
20	0	0	0	0		50	0	0	0	0
21	0	0	0	0		51	0	0	0	0
22	0	0	0	0		52	0	0	0	0
23	0	0	0	0		53	0	0	0	0
24	0	0	0	0		54	0	0	0	0
25	0	0	0	0		55	0	0	0	0
26	0	0	0	0		56	0	0	0	0
27	0	0	0	0		57	0	0	0	0
28	0	0	0	0		58	0	0	0	0
29	0	0	0	0		59	0	0	0	0

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 TESTING
STACK

OBSERVER: James Emiton

DATE: 9 octoberr 1992

FACILITY: USE Clarton Works

OBSERVATION: START TIME: 1300
END TIME: 1400

OBSERVATION POINT:
W/Wash Bath House of
#9

SOURCE: Battery Draft Stack

DISTANCE: a 6-25 ft

DIRECTION FROM: N-W of

HEIGHT: a 200 Ft

WIND:

SPEED: 16-m-p-H

DIRECTION: → S-W

TEMPERATURE: 64°

SKY CONDITION: P. Cloudy

BACKGROUND: Sky

READING CONDITIONS: Fair

COLOR OF EMISSION: N/A

TOTAL No. OF READINGS: 240

No. READINGS >= 20% 0

No. READINGS >= 60% 0

GREATEST OPACITY: 0

CREW: C FOREMAN: R. Hall

COMMENTS:

0	0	0	0	0		30	0	0	0	0
1	0	0	0	0		31	0	0	0	0
2	0	0	0	0		32	0	0	0	0
3	0	0	0	0		33	0	0	0	0
4	0	0	0	0		34	0	0	0	0
5	0	0	0	0		35	0	0	0	0
6	0	0	0	0		36	0	0	0	0
7	0	0	0	0		37	0	0	0	0
8	0	0	0	0		38	0	0	0	0
9	0	0	0	0		39	0	0	0	0
10	0	0	0	0		40	0	0	0	0
11	0	0	0	0	W Start	41	0	0	0	0
12	0	0	0	0		42	0	0	0	0
13	0	0	0	0		43	0	0	0	0
14	0	0	0	0		44	0	0	0	0
15	0	0	0	0		45	0	0	0	0
16	0	0	0	0		46	0	0	0	0
17	0	0	0	0		47	0	0	0	0
18	0	0	0	0		48	0	0	0	0
19	0	0	0	0		49	0	0	0	0
20	0	0	0	0	N Start	50	0	0	0	0
21	0	0	0	0		51	0	0	0	0
22	0	0	0	0		52	0	0	0	0
23	0	0	0	0		53	0	0	0	0
24	0	0	0	0		54	0	0	0	0
25	0	0	0	0	E Start	55	0	0	0	0
26	0	0	0	0		56	0	0	0	0
27	0	0	0	0		57	0	0	0	0
28	0	0	0	0		58	0	0	0	0
29	0	0	0	0		59	0	0	0	0

VISIBLE EMISSIONS OBSERVATIONS FORM

#9 Testing
STACK

OBSERVER: James E. McKay

DATE: 9 October 1992

FACILITY: USX Clairton Works

OBSERVATION: START TIME: 1400

END TIME: 1430

OBSERVATION POINT: Wabash Bath House Lot

SOURCE: #9 Battery Draft Stack

DISTANCE: @ 625 Ft

DIRECTION FROM: N-W of

HEIGHT: @ 200 Ft

WIND:

SPEED: 16 m.p.h

DIRECTION: → S-W

TEMPERATURE: 64°

SKY CONDITION: P. Cloudy

BACKGROUND: Sky

READING CONDITIONS: Rain

COLOR OF EMISSION: N/A

TOTAL No. OF READINGS: 120

No. READINGS >= 20% 0

No. READINGS >= 60% 0

GREATEST OPACITY: 0

CREW: C FOREMAN: R. Nell

COMMENTS:

0	0	0	0	0	30					
1	0	0	0	0	31					
2	0	0	0	0	32					
3	0	0	0	0	33					
4	0	0	0	0	34					
5	0	0	0	0	35					
6	0	0	0	0	36					
7	0	0	0	0	37					
8	0	0	0	0	38					
9	0	0	0	0	39					
10	0	0	0	0	40					
11	0	0	0	0	41					
12	0	0	0	0	42					
13	0	0	0	0	43					
14	0	0	0	0	44					
15	0	0	0	0	45					
16	0	0	0	0	46					
17	0	0	0	0	47					
18	0	0	0	0	48					
19	0	0	0	0	49					
20	0	0	0	0	50					
21	0	0	0	0	51					
22	0	0	0	0	52					
23	0	0	0	0	53					
24	0	0	0	0	54					
25	0	0	0	0	55					
26	0	0	0	0	56					
27	0	0	0	0	57					
28	0	0	0	0	58					
29	0	0	0	0	59					

E Stopped