


**ENVIRONMENTAL
PRODUCTS DIVISION**

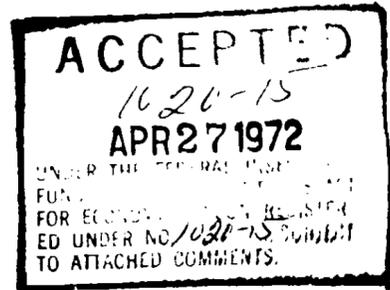

WATER TREATING MATERIAL

OAKITE® 255

EPA REG NO. 1020-15

***Controls growth of bacterial and fungal slime, algae, odor, scale and corrosion in
AIR CONDITIONING SYSTEMS—RECIRCULATING WATER COOLING SYSTEMS***

Active Ingredients:	Sodium Chromate (Na ₂ CrO ₄)	12.4%
	Potassium Chromate (K ₂ CrO ₄)	14.9%
	Disodium N-(2-Hydroxyethyl) imino- diacetate	2.6%
Inert Ingredient:	Water	70.1%

WARNING! Keep out of reach of children.
Contains chromium compounds. Harmful or fatal if swallowed or absorbed through the skin. May cause severe irritation to skin, mucous

membranes, and eyes. Do not get on skin, in eyes, or breathe spray mist. Avoid inhalation.

In case of contact, immediately flush skin or eyes with plenty of water for at least 15 minutes; for eyes, get medical attention.

DO NOT REUSE CONTAINER. DESTROY WHEN EMPTY.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams or ponds.

KEEP FROM FREEZING



OAKITE PRODUCTS, INC. • OAKITE PRODUCTS OF CANADA, LTD.
Offices and Warehouses in Principal Cities of U.S. and Canada.
Plants: Metuchen, N.J.; City of Industry, Cal.; Houston, Tex.; Bramalea, Ont., Canada.

EST. 1909





WATER TREATING MATERIAL

OAKITE[®] 255

EPA REG NO. 1020-15

**Controls bacterial and fungal slime, algae, odor, scale and corrosion in
NON-RECIRCULATING WATER COOLING SYSTEMS**

..... 12.4%
..... 14.9%
imino-
..... 2.6%
..... 70.1%

membranes, and eyes. Do not get on skin, in eyes, or breathe spray mist. Avoid inhalation.

In case of contact, immediately flush skin or eyes with plenty of water for at least 15 minutes; for eyes, get medical attention.

DO NOT REUSE CONTAINER. DESTROY WHEN EMPTY.

If swallowed or absorption to skin, mucous

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams or ponds.

KEEP FROM FREEZING



• OAKITE PRODUCTS OF CANADA, LTD.
Warehouses in Principal Cities of U.S. and Canada.
of Industry, Cal.; Houston, Tex.; Bramalea, Ont., Canada.

EST. 1909



**DIRECTIONS FOR USING
in Air Conditioning and Recirculating
Systems.**

Before adding Oakite 255 to the system, make sure all slime, scale or corrosion have been removed. If you need help in cleaning out the system before adding Oakite 255, consult with your local Oakite Technical Service Representative.

Additions of Oakite 255 should be made in the supply line of the system, near the recirculating pump. Upkeep should be by either periodic slug additions or with a pre-programmed controlled chemical feed pump, to maintain minimum levels as indicated by titration.

For control of bacterial and fungal slime, algae and odor: add 1 gallon of Oakite 255 for each 1,000 gallons of water in the system. Apply every two weeks or as needed at first sign of regrowth.

For control of scale, corrosion: add 1 gallon of Oakite 255 for each 1,000 to 3,000 gallons of water in the system, depending on the pH of the supply water. (The pH of the treated water should be maintained at 5.5 to 6.5.)

WHERE TO USE

Use Oakite 255 for treating the recirculating water in air conditioning system in air-conditioning equipment in industrial plants, hotels, restaurants, office buildings, retail stores and theatres; and for treating the recirculating water in such equipment as ammonia condensers and diesel engine cooling systems, and on air-conditioning equipment where water is recirculated. Do not use in humidifying systems where treated water is sprayed into the area being humidified.