



Penta-WR

CONCENTRATE 1 TO 5

WATER REPELLENT WOOD PRESERVATIVE

NET CONTENTS GALLONS

Chapman File # 10001 Spec. TI-W-572
PENTA-WR PROTECTS WOOD AGAINST
 SWELLING SHRINKING
 CHECKING WARPING
KILLS TERMITES, POWDER-POST
BETLES, STOPS ROT, STAIN AND
DECAY


- RECOMMENDED FOR USE ON:**
- | | |
|----------------|----------------|
| Joists | Interior Trim |
| Sills | Wall Paneling |
| Stairs | Furniture |
| Plates | Fence Pickets |
| Porches | Fence Rails |
| Shingles | Furring Strips |
| Trellises | Arbors |
| Doors | Windows |
| Steps | Window Frames |
| Subflooring | Flooring |
| Beverage Cases | |

In addition to preventing decay, blue stain, and insect attack on wood, Penta WR controls warping, swelling, shrinking and end-checking caused by changes in moisture content of lumber and plywood products. Use Penta WR on doors, windows, trim, shutters, porches and beverage cases.

DIRECTIONS FOR MIXING:
 Penta WR is a concentrate and must be diluted before use. For general use, dilute with water in the ratio of 1 part Penta WR to 5 parts water. For heavy duty use, dilute with water in the ratio of 1 part Penta WR to 3 parts water. For use on exterior surfaces, dilute with water in the ratio of 1 part Penta WR to 2 parts water. For use on interior surfaces, dilute with water in the ratio of 1 part Penta WR to 4 parts water. For use on wood preservative, dilute with water in the ratio of 1 part Penta WR to 1 part water. For use on wood preservative, dilute with water in the ratio of 1 part Penta WR to 1 part water.

DIRECTIONS FOR APPLICATION:
 Penta WR should be applied to wood surfaces with a brush, spray nozzle, or pump sprayer. For best results, apply to wood surfaces which are clean, dry, and free of paint or other finishes. For use on exterior surfaces, apply to wood surfaces which are clean, dry, and free of paint or other finishes. For use on interior surfaces, apply to wood surfaces which are clean, dry, and free of paint or other finishes. For use on wood preservative, apply to wood surfaces which are clean, dry, and free of paint or other finishes.

**WATER REPELLENT-CLEAR-PAINTABLE
 STOPS - KILLS TERMITES
 CONTROLS WARPING - SWELLING**

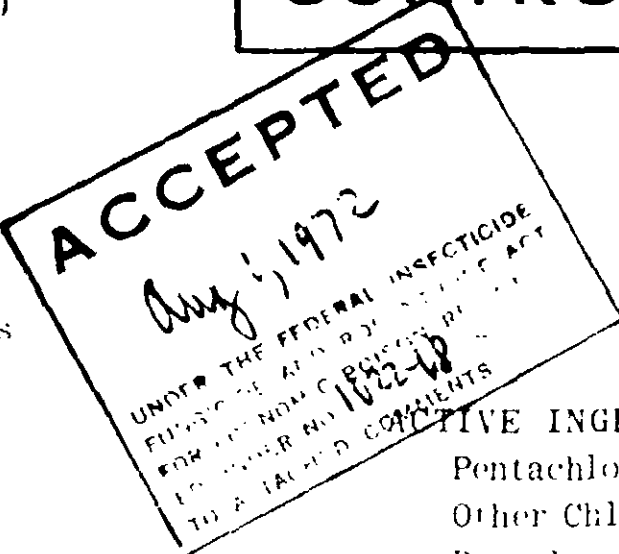

ACTIVE INGREDIENTS:

Pentachlorophenol*	21.76%
Other Chlorophenols*	2.53%
Petroleum Distillate	30.70%

INERT INGREDIENTS: 47.01%
 100.00%

*Equivalent to 25.3% Total active ingredient as determined by Test Spec. TI-W-570.

WARNING

KEEP OUT OF REACH OF CHILDREN

This product is highly toxic to fish and aquatic life. Do not discharge into streams, rivers, or other bodies of water. Do not use in areas where it may come in contact with water. Do not use on painted or finished surfaces. Do not use on wood which is to be painted or finished. Do not use on wood which is to be stained or varnished. Do not use on wood which is to be used for food contact. Do not use on wood which is to be used for firewood. Do not use on wood which is to be used for fuel. Do not use on wood which is to be used for other purposes.

NOTICE

If not possible, 2 liberal brush or spray applications should be applied. Allow at least 1 hour between applications. Make certain all areas are fully treated to get the maximum benefits. Where wood has been soaked for 3 minutes, it should be allowed to dry for at least 24 hours before being painted or varnished. Where drying conditions are poor, as in cold or damp weather or where longer soaking periods are used, drying time may have to be increased before painting.

Powder-post beetles which invade furniture, flooring and structural lumber are killed by application of Penta WR. These insects will not attack wood treated with Penta WR.

Wood to be protected against subterranean termites should be treated before use in construction. Termites will not attack wood treated with Penta WR. For use on exterior surfaces, dilute with water in the ratio of 1 part Penta WR to 2 parts water.