

ESPECIAL



**PRECAUTIONARY
STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS
WARNING**

Harmful or fatal if swallowed or absorbed through the skin. Do not get in eyes, on skin or on clothing. Avoid breathing spray mists or vapors. Wear goggles or face shield and rubber gloves when handling.

FIRST AID

IF IN EYES—Immediately flush with large quantity of water and get medical attention.

IF ON SKIN—Flush with water. Remove and wash contaminated clothing before re-use.

IF SWALLOWED—do not induce vomiting. CALL A DOCTOR.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

Do not store or use near heat or open flame.

STORAGE AND DISPOSAL

Do not reuse empty container. Wrap container and put it in trash collection.

BEST DOCUMENT AVAILABLE

BEST DOCUMENT AVAILABLE

WARRANTY STATEMENT

Neither Chapman Chemical Company nor the seller makes any representation or warranty, expressed or implied, concerning the use of this material, other than indicated on the label. Neither shall be held responsible in any manner for any personal injury or property damage or other type of loss resulting from improper handling, storage or use of this material. The buyer accepts and uses this material on these conditions.

MANUFACTURED BY
CHAPMAN CHEMICAL COMPANY
MEMPHIS, TN 38108

EPA Reg
EPA Es
MEETS
TT-W-57
TYPE II

Copper
AWPA S

LY FOR WOOD EXPOSED TO FRESH AND SALT WATER SC

CHAPMAN

MARINE AND GARDEN


WOOD



TABLE

BEST DOGUM

COPPER NAPHTHENATE WR

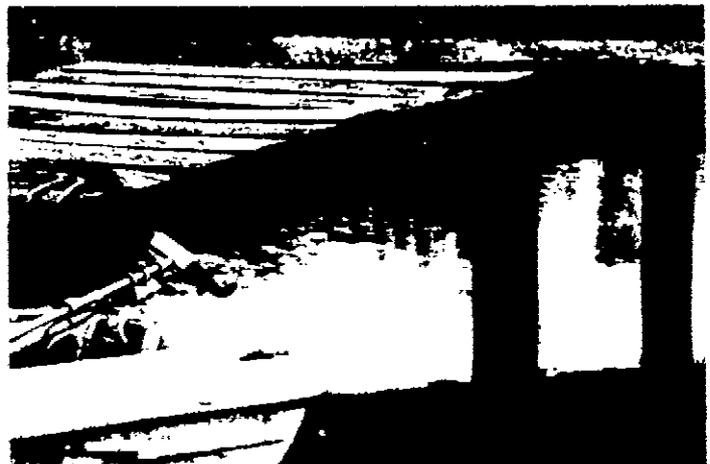

REPELS WATER - STOPS ROT

CONTROLS WARPING & SWELLING
PROTECTS AGAINST INSECT ATTACK/PAINTABLE

3. No. 1022-409
1. No. 1022-TN-1
FED. SPEC.

2 B
COMPOSITION C

Naphthenate meets
specification P8.

KEEP OUT OF REACH OF CHILDREN

WARNING

See back panel for additional
precautionary statements

INGREDIENT STATEMENT
ACTIVE INGREDIENTS
Copper Naphthenate (as copper) 2.00%
Aromatic Petroleum Derivative 66.25%
INERT INGREDIENTS 29.75%
TOTAL 100.00%

3.785 LITERS
1 GALLON

ING



NT AVAILABLE

COATED
10 22-40 P.
MAR 29 1983
The Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 1022-409



RECOMMENDED USES

MARINE AND GARDEN WOOD PRESERVATIVE is recommended for all wooden items in contact with either fresh or salt water, including boats, piers and docks.

MARINE AND GARDEN WOOD PRESERVATIVE is recommended for landscape timbers, wood seedling trays, burlap for wrapping root systems, rope and other greenhouse and nursery items, including plant and flower boxes.

MARINE AND GARDEN WOOD PRESERVATIVE may also be used on windows, window frames, stairs, porches, trellises, steps, fence pickets, fence rails, furring strips and arbors.

Powderpost beetles and termites are killed by application of this preservative. These insects will not attack properly treated wood.

Surfaces treated with MARINE AND GARDEN WOOD PRESERVATIVE are non-toxic to plants and flowers.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Apply liberally to all wood surfaces exposed to moisture or weather. Make certain all areas are fully treated to get the maximum benefits.

Dip treatment is the most effective. A three minute immersion is adequate for most applications. Since a longer dip time achieves a higher retention of preservative in the wood, 12 to 48 hours immersion time is required for wood placed in contact with the soil, or used in construction of boats, piers, and other large wooden structures. Wood should be free of bark, dry and well seasoned before treatment.

Brush or spray treatments are satisfactory for above ground applications, but should be used for ground contact applications only when dipping is not possible. In such cases, apply at least 2 liberal brush or spray treatments, allowing at least 1 hour between each coat.

Rope and burlap should be dip soaked or sprayed until wet.

Wood treated with MARINE AND GARDEN WOOD PRESERVATIVE has a green color that fades slowly over time. Allow 24 hours or longer after application of the preservative prior to painting.

In addition to retarding decay, blue stain, and insect attack on treated wood, this preservative controls warping, swelling, shrinking and end checking caused by changes in moisture content of lumber and plywood products.

Wood to be protected against subterranean termites should be treated before use in construction.

ESPECIAL



BEST DOCUMENT AVAIL

DIFFERENT ANALYSIS

EPA Reg
EPA E:
MEETS
TT-W-5
TYPE II

Copper
AWPA E