



AMBRITE T

Net Contents

Gallons

INSECTICIDAL WOOD PRESERVATIVE

FOR CONTROL OF AMBROSIA BEETLES, PINE SAWYERS AND CERTAIN OTHER INSECTS, PLUS FUNGUS STAIN AND MOLD IN LOGS AND LUMBER

GENERAL

AMBRITE T is Chapman's first water-emulsible product for the control of both insects and sapstain. Mixed with water as directed, the ready-to-use AMBRITE T is non alkaline and needs no buffers or operator control to offset the natural acidity of wood.


DIRECTIONS FOR DIPPING LUMBER

Ambrite T is mixed with water for use. For control of sapstain, mold and Ambrosia beetles, combine one gallon of AMBRITE T with 75 gallons of water. If control of pine sawyers and other wood boring beetles is required, combine one gallon of AMBRITE T with 37 gallons of water. These concentrations are normally sufficient for rough sawn lumber when drying is carried out in accordance with industry accepted standards.

For prolonged exposure, very susceptible wood species, or severe conditions, as in tropical areas, AMBRITE T should be used as much higher strengths, ranging from 1 gallon in 50 gallons of water to as strong as 1 gallon in 20 gallons of water, or possibly even stronger.

Dipping is a far surer process for treating lumber than is spraying, owing to constant trouble with clogging or spray nozzles. If spraying is the only alternative, the solution should be used at double the strengths for recommended dipping.

EPA Reg. No. 102-477

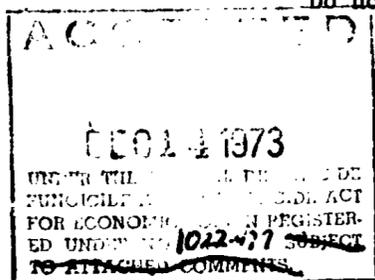

INGREDIENT STATEMENT

ACTIVE INGREDIENTS:	
Benzene Hexachloride, gamma isomer.....	6.63%
Benzene Hexachloride, other isomers.....	8.27%
Pentachlorophenol.....	17.20%
Other Chlorinated phenols.....	2.00%
Xylene.....	31.10%
INERT INGREDIENTS.....	34.80%
Total	100.00%

WARNING

KEEP OUT OF REACH OF CHILDREN

May be fatal if swallowed. Do not breathe fumes or spray mist. Do not get in eyes, or skin or on clothing. Wear rubber gloves when handling lumber wet with solution. Causes eye damage. Wear goggles or face shield when handling. In case of skin contact, wash with soap and water; for eyes, flush with water for at least 15 minutes and get medical attention. In case of swallowing, induce vomiting by giving an emetic such as a teaspoon of mustard in water followed by flour and water. CALL A PHYSICIAN IMMEDIATELY.

Keep away from animals. Avoid contact with feed and foodstuffs. Keep out of potable water supplies. Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment or disposal of wastes.

Do not use, pour, spill or store near heat or open flame.

For best results, the wood should be treated within 24 hours of cutting by dipping in a suitable vat. Apply 8 to 10 gallons of the water-diluted ready-to-use AMBRITE T per 1000 board feet of lumber.

Freshly treated lumber should be protected from rain. Dip tanks should be protected from over-dilution and the accumulated sawdust should be raked out daily.

DIRECTIONS FOR SPRAYING LOGS

Add 1 gallon of AMBRITE T to 17 gallons of water. Stir thoroughly to prepare spray solution. For longer residual effect and to color-identify sprayed areas, add one gallon of AMBRITE T to 15 gallons of water and then stir in 2 gallons of a colored Chapman Sealtite 60.

All these emulsions should be agitated frequently when in mixing tanks, or sprayer tank. Strain the emulsion if necessary when pouring into the sprayer tank.

For effective control of stain and insects, spray logs within 24 hours of felling and bucking. Wet the logs thoroughly with the spray on both ends and sides.

NOTICE

Neither the manufacturer nor the seller makes any representation or warranty, expressed or implied, concerning this material, except that it is of standard quality. Neither shall be held responsible in any manner for any personal injury, property damage or other type of loss resulting from handling, storage or use of this material. Buyer assumes all risk of use and/or handling of this material when such use and/or handling is contrary to label instructions.