



P - 180

NET CONTENTS

GALLONS

CONCENTRATE FUNGICIDE FOR CONTROL OF SAPSTAIN AND MOLD IN FRESH CUT LUMBER AND TIMBER

READ THIS LABEL BEFORE USING PRODUCT

DIRECTIONS FOR USE

GENERAL: P 180 is a concentrated liquid product readily miscible with water. It may be mixed with water by ordinary means or through the CHAPMAN SURE-MIX proportioning device or Dispenser.

When mixing a batch of P 180 solution by ordinary means it is best to add part of the water to the mixing tank, then add the measured amount of P 180 and follow the same balance of water, rinsing out the measuring container into the mixing tank at the same time.

It is recommended that plastic-coated synthetic rubber, liquid proof gloves be worn during preparation of the mixture or handling of the treated lumber while wet.

Delayed treatment may allow interior stain to develop, so lumber should be treated with 24 hours of cutting by a dip or spray application of P 180. Freshly treated lumber should be protected from rain. Dipping tanks should also be protected from over-dilution by rainfall and sawdust should be raked out daily.

Approved stacking practices should be employed with adequate space between boards and stacks. Green lumber or infected wood should not be used for stickers. The bottoms of the stacks should be well above the ground with weeds and debris kept away from stacks.

INGREDIENTS

ACTIVE INGREDIENTS:

Sodium Pentachlorophenate 21.91%
Sodium Tetrachlorophenate 3.02%

INERT INGREDIENTS: 75.07%

TOTAL 100.00%

TREATMENT: For lumber 2 inches or less in thickness, combine one gallon of P 180 with 100 gallons of water. For thicker lumber or timbers or bundled lath or shook, or under unusually severe or lengthy periods or conditions favorable to sapstain and mold development, combine one gallon of P 180 with 30 to 50 gallons of water. A dip of 15 seconds or more is sufficient.


WARNING

KEEP OUT OF REACH OF CHILDREN

- May be fatal if swallowed!
- May produce delayed chemical burns!
- Do not breathe spray mist!
- Do not get in eyes, on skin or on clothing!
- May cause severe eye damage. Wear goggles or face shield when handling.
- In case of contact wash skin with soap and water; for eyes, flush with water for at least 15 minutes and get medical attention.
- Causes skin irritation.
- Wash thoroughly after handling.
- Avoid contamination of feed or foodstuffs.

This product is toxic to fish and wildlife. Do not discharge wastes from dipping pond or vat where it will drain into lakes, streams, ponds or public waters. Apply this product only as specified on this Label.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place away from water supplies.

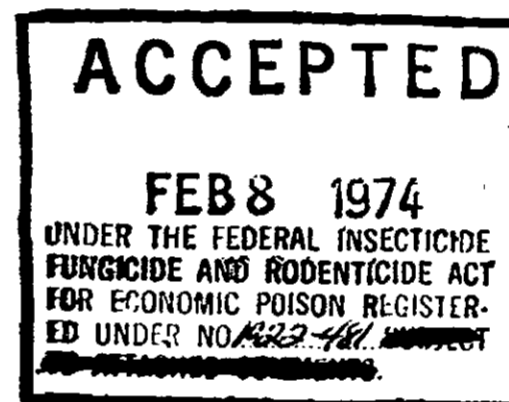

NOTICE

Neither the manufacturer nor the seller makes any representation or warranty, express or implied, concerning this product, except that it is of standard quality. Neither shall be held responsible in any manner for personal injury, property damage or other type of loss resulting from the improper handling, storage, or misuse of this product. Buyer accepts and uses this product on these conditions.

EPA Reg. No. 1022-481

MANUFACTURED BY **CHAPMAN CHEMICAL COMPANY** MEMPHIS, TENNESSEE