


# PQ-20

CONTROLS ROT, STAIN AND MOLD

FOR INDUSTRIAL USE ONLY

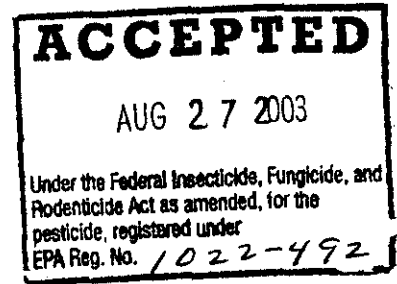

**INGREDIENT STATEMENT:**

**ACTIVE INGREDIENT:**

Copper-8-Quinolinolate ..... 3.75%

**INERT INGREDIENTS:** ..... 96.25%

**TOTAL** ..... 100.00%

EPA Reg. No. 1022-492

EPA Est. No. 1022-TN-1

Manufactured by:

Net Contents:

IBC Manufacturing Company  
416 East Brooks Road  
Memphis, Tennessee 38109

**PRECAUTIONARY STATEMENTS**

Hazards to Humans and Domestic Animals

## DANGER

Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful if swallowed. Do not breathe spray mist.

**SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS**

## ENVIRONMENTAL HAZARDS

This product is toxic to fish. DO NOT discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. DO NOT discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the Environmental Protection Agency.

<b>FIRST AID</b>	
<b>IF SWALLOWED:</b>	<ul style="list-style-type: none"> <li>▪ Call a poison control center or doctor immediately for treatment advice.</li> <li>▪ Have person sip a glass of water if able to swallow.</li> <li>▪ Do not induce vomiting unless told by a Poison Control Center or doctor.</li> <li>▪ Do not give anything by mouth to an unconscious person.</li> </ul>
<b>IF IN EYES:</b>	<ul style="list-style-type: none"> <li>▪ Hold eye open and rinse slowly and gently with water for 15 – 20 minutes.</li> <li>▪ Remove contact lenses, if present, after the first 5 minutes, then continue rinsing.</li> <li>▪ Call a poison control center or doctor for treatment advice.</li> </ul>
<b>IF ON SKIN OR CLOTHING:</b>	<ul style="list-style-type: none"> <li>▪ Take off contaminated clothing.</li> <li>▪ Rinse skin immediately with plenty of water for 15 – 20 minutes.</li> <li>▪ Call a Poison Control Center or doctor for further treatment advice.</li> </ul>
<b>HOT LINE NUMBER</b>	
<p>In case of emergency, call Chemtrec toll free at 800-424-9300. Have the product container or label with you when calling a poison control center or doctor or going for treatment.</p>	

## DIRECTIONS FOR USE

It is violation of Federal law to use this product in a manner inconsistent with its labeling.

<b>STORAGE AND DISPOSAL</b>
<p><b>PROHIBITIONS:</b> Do not contaminate water, food or feed by storage or disposal.</p>
<p><b>PESTICIDE DISPOSAL:</b> Pesticide, spray mixture or rinse water that cannot be used according to label instructions must be disposed of according to applicable Federal, State or local procedures.</p>
<p><b>CONTAINER DISPOSAL:</b> Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.</p>
<p><b>GENERAL:</b> Consult Federal, State or local disposal authorities for approved alternative procedures.</p>

Durability is directly related to the amount of preservative retained by the wood and the extent of its impregnation. For optimum decay resistance, retention of copper-8-quinolinolate at 0.06 pounds per cubic foot should be achieved. This goal can be accomplished in many ways such as illustrated by the following:

- 1. Liberal brush or spray applications of PQ-20 undiluted.
- 2. Prolonged soaking (24 – 48 hours) in a solution of one gallon of PQ-20 diluted with 3 gallons of petroleum oil, to achieve absorption of 6 pounds of solution per cubic foot of wood.
- 3. Pressure impregnation with a solution of one gallon of PQ-20 diluted with 5 gallons of petroleum oil, to achieve absorption of 10 pounds of solution per cubic foot of wood.

The solution of one volume of PQ-20 with 15 volumes of petroleum oil (7.5 #/gallon) also can be applied to textiles such as canvas or burlap and to rope and twine. A dipping time sufficient to allow complete penetration is required and would range from 3 to 10 minutes depending upon the tightness of weave and the diameter of the elements.

WARRANTY AND LIMITATION OF DAMAGES

Seller warrants to those persons lawfully acquiring title to this product that at the time of the first sale of this product by seller this product conformed to its chemical description and that it was reasonably fit for the purposes stated on the product label when used both in accordance with the Direction for Use appearing on the product label and under normal conditions of use. Buyers and users of this product assume the risk of all loss or damage from use or handling of this product that results from their failure to read and comply with the Directions for Use of this product which appear on the product label. SELLER MAKES NO OTHER EXPRESS OR IMPLIED WARRANTY, INCLUDING ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS OR OF MERCHANTABILITY, AND NO AGENT OF SELLER IS AUTHORIZED TO DO SO. Unless expressly prohibited by state law, the liability of seller for any breach of warranty shall not exceed the purchase price of the product as to which a claim is made.

