

CUNAPSOL-2
Wood Preservative

FOR EXTERIOR USE ONLY

Ready-to-Use

Ingredient Statement:

Copper Naphthenate	18.16%*
Inert Ingredients	81.84%
Total	100.00%

*Equivalent to 2% metallic copper


EPA Reg. No. 1022-523

EPA Est. No. 1022-TN-1

KEEP OUT OF REACH OF CHILDREN


WARNING

See Precautionary Statements

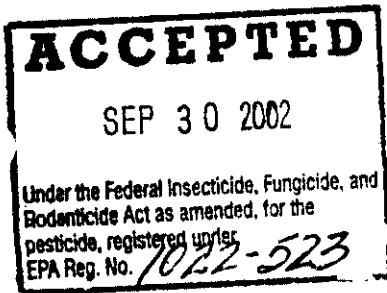

IBC Manufacturing Company
416 East Brooks Road
Memphis, TN 38109
901-344-5350

Net Contents:

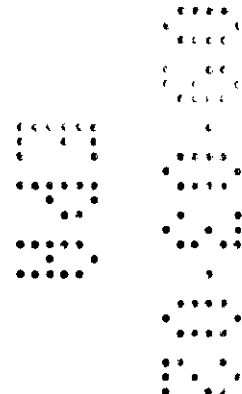

2 7 5

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING

Causes substantial but temporary eye injury. Do not get in eyes or on clothing. Wear goggles, face shield or safety glasses when handling. Wash thoroughly with soap and water after handling. Causes skin irritation. Do not get on skin or on clothing. Remove contaminated clothing and wash before reuse. Harmful if swallowed.

DO NOT breathe vapors or mist during brush, roll, spray, and dip applications. Wear a NIOSH/MHSA-approved mist/vapor respirator when spraying for continued or prolonged use of this product or for frequent use of the product.

In case of medical questions, emergencies or accidents involving this product, call Chemtrec at 1-800-424-9300.

Application of this product may produce strong, lingering, unpleasant odor.

FIRST AID:	
IF SWALLOWED:	<ul style="list-style-type: none"> ▪ Immediately call a poison control center or doctor. ▪ Do not induce vomiting unless told to do so by a poison control center or doctor. ▪ Do not give any liquid to the person. ▪ Do not give anything by mouth to an unconscious person.
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none"> ▪ Take off contaminated clothing. ▪ Rinse skin immediately with plenty of water for 15 – 20 minutes. ▪ Call a poison control center or doctor for treatment advice.
IF IN EYES:	<ul style="list-style-type: none"> ▪ Hold eye open and rinse slowly and gently with water for 15 – 20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. ▪ Call a poison control center or doctor for treatment advice.
Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
FOR 24-HOUR EMERGENCY MEDICAL ASSISTANCE, CALL CHEMTREC AT 1-800-424-9300	

ENVIRONMENTAL HAZARDS

This product is toxic to fish and aquatic organisms.

DO NOT discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. DO NOT discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Use only the application method specified for a particular use.

Products formulated or repackaged from this product must be labeled for "Exterior Use Only", and must bear all the statements listed under the section entitled Precautionary Statements and formulator(s) or repackager(s) telephone number.

Cunapsol-2 requires no dilution before use. Use as received, following label directions. It is intended for wood products that usually require painting or stenciling such as millwork and the like or in special situations to treat lumber for long storage in the open or in ground contact by simple non-pressure method.

FOR TREATMENT BY DIP, ROLLER, BRUSH, AND SPRAYING

COVERAGE: One gallon covers 100 – 300 sq. ft. depending upon the wood species, porosity of the wood, and method of application.

ABOVE GROUND CONTACT

The best results will be obtained if wood to be treated is immersed for 3 minutes or longer. If dipping is not possible, 2 brush coats, roller, or spray applications should be applied. Allow at least 1 hour between applications. Make certain all areas are fully treated to get the maximum benefits. Allow 24 hours or longer after application of the preservative prior to painting.

GROUND CONTACT

Seasoned or green wood may be treated. Make sure the wood is free of bark then immerse in Cunapsol-2 for 12 – 48 hours or until the sapwood is completely penetrated.

RECOMMENDED FOR

Windows, window frames, doors, stairs, porches, siding, shingles, steps, fence pickets, fence rails and beverage cases. Cunapsol-2 is a brush-on preservative especially formulated for the coating of freshly sawn ends of pressure-treated lumber.

Also for use on fence posts, poles, foundation sills, decks, boats and all exterior wood exposed to moisture or weather. Pretreatment only. Do Not apply at sites on or near water or wetlands.

Powder post beetles which invade structural lumber are controlled by application of this preservative. These insects will not attack the treated wood.


Since Cunapsol-2 has very low phytotoxicity, it can be used to treat wood for greenhouses, nursery flats, etc.

In addition to preventing decay, blue stain, and insect attack on wood, this preservative controls warping, swelling, shrinking and end checking caused by changes in moisture content of lumber and plywood products.

Wood to be protected against subterranean termites should be treated before use in construction. Termites will not attack wood treated with Cunapsol-2 wood preservative.

Wood treated with Cunapsol-2 should not be used where it may come in contact with food, feed or potable water. Do not use water collected from treated wood for potable water.

Wood treated with Cunapsol-2 can be top coated with primer and painted.

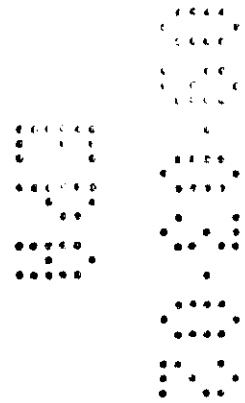

STORAGE AND DISPOSAL

PROHIBITIONS: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL: Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

GENERAL: Consult Federal, State or local disposal authorities for approved alternate procedures.

WARRANTY AND LIMITATION OF DAMAGES

Seller warrants to those persons lawfully acquiring title to this product that at the time of the first sale of this product by seller this product conformed to its chemical description and that it was reasonably fit for the purposes stated on the product label when used both in accordance with the Direction for Use appearing on the product label and under normal conditions of use. Buyers and users of this product assume the risk of all loss or damage from use or handling of this product that results from their failure to read and comply with the Directions for Use of this product which appear on the product label. SELLER MAKES NO OTHER EXPRESS OR IMPLIED WARRANTY, INCLUDING ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS OR OF MERCHANTABILITY, AND NO AGENT OF SELLER IS AUTHORIZED TO DO SO. Unless expressly prohibited by state law, the liability of seller for any breach of warranty shall not exceed the purchase price of the product as to which a claim is made.

8/02