

# MITROL T-1009

## ACTIVE INGREDIENTS:

Methylene bis(thiocyanate) ..... 10%  
2-(Thiocyanomethylthio)benzothiazole ..... 10%

INERT INGREDIENTS ..... 80%  
Weight per gallon ..... 8.72 lbs.

**KEEP OUT OF REACH OF CHILDREN  
DANGER**

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER:** Corrosive, causes irreversible eye damage and causes skin damage. Harmful or fatal if swallowed or absorbed through the skin. This product is a potential skin sensitizer. Workmen handling this product or treated material should wear impervious gloves, goggles or face shield, and protective clothing. All protective clothing, work shoes or boots, and equipment must be left at the work site at the end of the day. Eating, drinking, or smoking during use of this product is prohibited.

**FIRST AID:** *In case of skin contact*, wash promptly and thoroughly with soap and water and finally with glycerin. *If product gets in the eyes*, flush immediately with copious amounts of clean, cool water for 15 to 30 minutes. Get medical attention immediately. *If product is swallowed*, call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. *Do not induce vomiting or give anything by mouth to an unconscious person.*

**ENVIRONMENTAL HAZARDS:** This pesticide is toxic to fish. Do not apply directly to any body of water or wetlands. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency.

Manufactured by:  
Chapman Chemical Co.  
P. O. Box 9158  
Memphis, TN 38109

EPA REG. NO. 1022-

EPA Est. No. 1022-TN-1

NET CONTENTS \_\_\_\_\_

## DIRECTIONS FOR USE


It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**SAPSTAIN AND MOLD CONTROL:** MITROL T-1009 is used to control sapstain and mold on freshly cut hardwood and softwood lumber, logs, poles, posts and timbers. It is applied by dipping or spraying the wood until complete surface wetting is accomplished. Use 3 to 16 lbs of MITROL T-1009/100 gal water and agitate vigorously until MITROL T-1009 is thoroughly dispersed. Rates to be used will vary according to temperature, humidity, wood moisture, storage conditions, etc. Under conditions suitable for aggressive mold growth, the high rate mentioned above should be used. Treatment should be made as quickly as possible after lumber is cut and always within 24 hours after cutting. Treated wood should be protected from heavy rains immediately after treatment.

**PARTICLE BOARD:** MITROL T-1009 prevents mold growth on the surface of particle board, insulation board, and other woodbase fiber and particle panel materials. MITROL T-1009 is mixed with the resin or binding agent at 0.1 to 1% based on the dry weight of the wood.

**CAULKING-SEALANTS & WALLCOVERING ADHESIVES:** MITROL T-1009 prevents fungal disfigurement in caulking-sealants and vinyl acetate wallcovering adhesives. It is added at rates of 0.5 to 0.75% based on the total wet weight of the substrate and mixed to insure even distribution.

**NOTE:** Do not use in caulking-sealant products intended for use in contact with food.

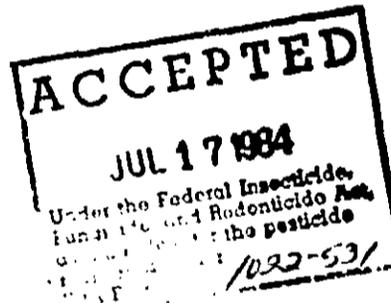

BEST DOCUMENT AVAILABLE

## STORAGE & DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

**STORAGE:** Do not expose to extreme temperatures. Do not stack more than five drums high. Drums should be opened in well ventilated areas. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at your EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.