

## WARNING

IF SWALLOWED, INDUCE VOMITING. DO NOT  
TAKE OR DRINK ANY FOOD OR BEVERAGE  
TILL AFTER SWALLOWING.

IF TAKEN INTERNALLY OR GETTING BELOW  
DINDO, CALL A PHYSICIAN IMMEDIATELY.

IF CONTACTED WITH EYES, FLUSH IMMEDIATELY  
WITH WATER. If clothing is soiled, remove it  
and wash thoroughly with soap and water.  
If on face, wash with soap and water.  
If on hands, wash with soap and water.  
If on face, wash with soap and water.  
If on hands, wash with soap and water.  
If on face, wash with soap and water.  
If on hands, wash with soap and water.

IF CONTACTED WITH SKIN, WASH IMMEDIATELY  
WITH WATER. Do not contaminate  
water by cleaning of equipment or disposal of  
waste. Apply this product only as specified  
on the label.

USE ONLY IN EMPTY CONTAINER. WASH  
THOROUGHLY WITH WATER AND DETERGENT.  
DISCARD IN A SAFE PLACE.

WARNING: FLAMMABLE! KEEP AWAY FROM  
HEAT OR OPEN FLAME.  
WEAR PROTECTIVE CLOTHING AND RUBBER  
GLOVES IN MIXING AND NOTICE STATEMENTS  
CAREFULLY.

★ ★ ★ ★


## NOTICE

Manufacturer's warranty is void if applied  
concerning the use of this product. See label  
for details on this warranty. Cover as much of the  
surface and/or length of the material as  
possible and do not apply to any other  
material.

NET CONTENTS

GALLONS

# CRE-O-TOX

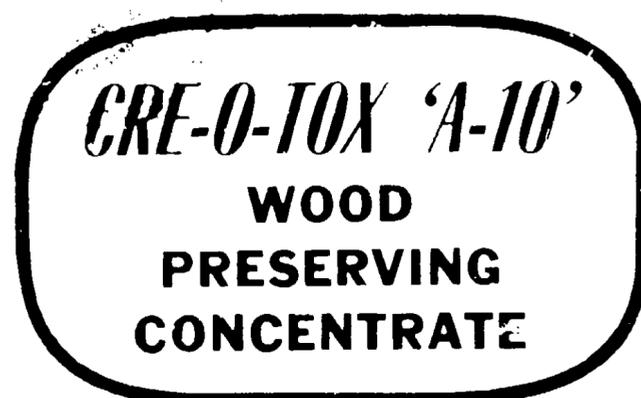

## WARNING

KEEP OUT OF REACH OF CHILDREN

SEE LEFT PANEL FOR ADDITIONAL CAUTIONS

### ACTIVE INGREDIENTS

Pentachlorophenol	35.69%
Other chlorophenols and related compounds	5.16%
Petroleum distillate	6.20%
INERT INGREDIENTS	52.95%

Contains 43.0% technical pentachlorophenol as  
defined in Federal Specifications TT-W 570

EPA Reg. No. 109-4

## CRE-O-TOX CHEMICAL CO.

2670 BROAD AVE. • MEMPHIS, TENN. 38112

## DIRECTIONS

For use on wood preservative, see label for  
directions. For use on wood preservative, see label for  
directions.

To use on wood preservative, see label for  
directions. For use on wood preservative, see label for  
directions.

**SOIL TREATMENT:** A 5% penta solution for termite  
control treatment 12 feet deep around or fire  
perimeter and foundation walls, plumbing  
chases, etc., and apply a 5% penta solution  
at the rate of 1 gallon to each lineal foot of  
trench and 1/2 the rate for deeper founda-  
tions. In a trench 2 feet deep and apply  
5% penta solution at the rate of 10 gallons  
per 10 lineal feet. Bottom of trench should  
not be lower than top of footings. Outer wall  
of trench must be covered with tar paper or  
a similar impervious material so the solution  
will not seep out into the soil.

**WOOD TREATMENT:** Generally millwork will  
absorb about 1 gallon of 5% penta solution  
per 100 board feet. When treating existing  
structures, two applications by spraying  
should be made for better coverage and pene-  
tration are obtained. To treat building framing  
work, use 1/2 for framing and general repairs  
apply solution by dipping, brushing or spraying.  
Application should be applied when humidity  
is 70-80 percent. Drying time should be from  
24-48 hours, depending on the wood  
species and conditions.

For use on wood preservative, see label for  
directions. For use on wood preservative, see label for  
directions.