


ACCEPTED

hockwald

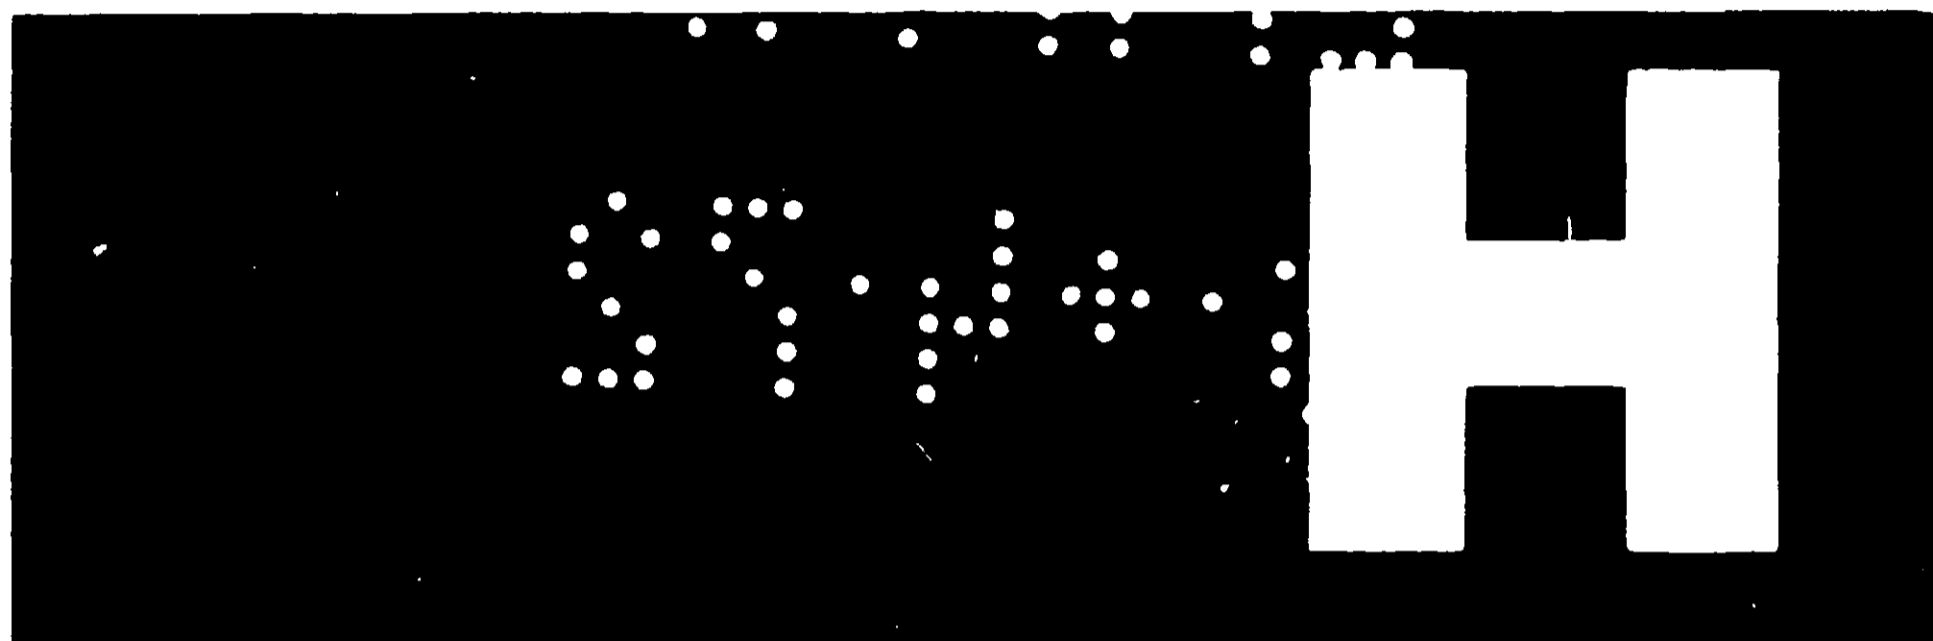

A CONSOLIDATED FOODS COMPANY • RESPONSIVE TO CONSUMER NEEDS

DIRECTIONS FOR USE

WEARING APPAREL AND HOUSEHOLD FURNISHINGS AGAINST MOTHS, BOOK LICE, CARPET BEETLES—Hang articles in air-tight vault at temperature of 70° F. or higher. Pour Fumisol in a shallow pan near ceiling, using 1½ gal. Fumisol per 1,000 cu. ft. of vault. Close door and seal. Do not enter vault during fumigation. After a minimum of 16 hours, open door and ventilate vault until no odor of fumigant remains.

GRAIN IN BINS OR SILOS AGAINST GRANARY, GRAIN AND FLOUR BEETLES, AND GRAIN WEEVILS, THEIR LARVAE AND EGGS: Use in air-tight bin or silo, if necessary line with heavy paper before filling with grain. Level surface of grain, breaking up any lumps caused by mold. Pour Fumisol directly and evenly on grain at rate of 6 gal. per 1,000 bushels of grain. If top of bin or silo has a large open space, cover treated grain with tarpaulin. Period of exposure should be at least 24 hours.

FUMISOL

ACTIVE INGREDIENTS: 100%
Ethylene Dichloride 70.3% by wt., Carbon Tetrachloride 29.7%
by wt.

EPA Reg. No. 1111-132

DANGER



POISON

KEEP OUT OF REACH OF CHILDREN

**SEE FIRST AID INSTRUCTIONS
CONTAINS CHLORINATED
HYDROCARBONS
NOT FOR HOUSEHOLD USE**

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

See Side Panel for Additional Cautions.

NET CONTENTS _____ GALLONS

FUMISOL

ACTIVE INGREDIENTS: 100%

Ethylene Dichloride 70.3% by wt., Carbon Tetrachloride 29.7% by wt.

EPA Reg. No. 1111-132

DANGER



POISON

KEEP OUT OF REACH OF CHILDREN

**SEE FIRST AID INSTRUCTIONS
CONTAINS CHLORINATED
HYDROCARBONS
NOT FOR HOUSEHOLD USE**

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

See Side Panel for Additional Cautions.

NET CONTENTS _____ GALLONS

GRAIN IN TERMINAL ELEVATORS: Drip or spray Fumisol onto grain while grain is being turned, using 4 gal. per 1000 bushels of grain. Close and seal doors of elevator. Period of exposure should be at least 24 hours.

DANGER

VOLATILE LIQUID. Hazardous vapor and liquid. May be fatal if inhaled or swallowed. Use only with adequate ventilation. Do not breathe vapor. Avoid contact with skin. Do not take internally.

DANGER Not for household use. Avoid contact with hot surface or flame. During application or re-entry of treated areas, wear full face mask with black canister meeting the specifications of the U.S. Bureau of Mines for organic vapors or an airline respirator.

FIRST AID: If swallowed, make patient vomit immediately (finger down throat or if conscious give warm mustard water or salt water freely. Keep patient warm. If conscious, give coffee, call a physician. If affected by exposure to fumes, remove to fresh air and call a physician. If breathing has stopped, apply artificial respiration. Call a physician. **NOTE:** Use of Fumisol at temperatures lower than 70° F., is not recommended. Use in spaces not air-tight will require higher dosages and longer exposures. Consult local county agricultural agent for further details.

MANUFACTURED BY

HOCKWALD CHEMICALS

A Division of

OXFORD CHEMICALS

P.O. Box 227, Brisbane, Calif. 94005

7201 Paramount Blvd., Pico Rivera 90660

ESTABLISHED SINCE 1900