#### CAUTION

KEER OUT OF REACH OF CHILDREN and PETS

THEORDAND TO THE STORY OF THE STORY OF THE WAS A STORY 

The transfer of some of Agree of a cot

11 CI

Commence of the second second

The Content of the Secretarian and the and the first of the Country of the same a mercian to the top

contrare to the small to a

the will be on tologo cops to be test don't commals or one also, an emerge or early

Die to tous in rain, barn, in bout a become Pince empty contoiner thoroughly with water and dispose of "

#### FISH and WILDLIFE CAUTION

Typic to fish and wildlife form forming on preated areas to be bolled. Do not apply when weather conditions towns diff from mean treated for a contaminate water by colorning of equipment or disposal of wester The participations are body of victor proregarding without a report of the form of the man appears 1, 1 6.1.

#### ANTIDOTE

after where we can appear to a tappe of the or the attention and the and the second control of the second control of the THE REPORT OF THE PROPERTY OF

NET CONTENTS ONE POUND

1,1

### SEACOAST LABORATORIES, INC.

EAST BRUNSWICK N. J. CH816



#### SUGGESTED USE

To control our constraint and the the Brette and As Mile Bertie Gene Lyne Can received

. . . . Same Same The state of the s A, PROADE

Section 1 CONTRACTOR


عوالة المناسبة العالم quitar was 

bed with no

#### SUBTERRANEAN TERMITES

SCOLE APPLIED ATTO A ( ) 11 ( ) 1; 1 / 2 . . . . . . . . . Asset Same 

The track of the second • 15 A Marie Carlos Company Company

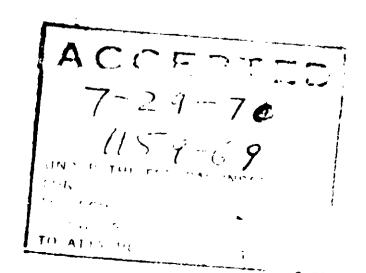

# CHLORDANE for Control of Termites

Mix this concentrate with water by thorough agitation at the rate of one gallon of concentrate to 46 gallons of water (for a 1% solution) or one gallon to 23 gallons of water (for a 2% solution). A proper mixture will have the appearance of a milky emulsion with no free oil on the surface.

#### **BUILDINGS WITH CRAWL SPACES**

- 1. Apply 2 gallons per 5 linear feet to critical areas under the house. Treatment should be made along the inside of foundation walls, around piers, sewer pipes, conduits, etc. Trench according to directions in Point No. 2.
- 2. Along the outside of foundation walls, dig a narrow trench, no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a layer of soil. A trench 30 inches deep is a maximum depth required next to those foundations where the top of the footings is greater than 30 inches deep.
- 3. Apply 1 gallon per 10 square feet of soil surface under attached porches, entrance platforms, utility entrances, and similar situations where slab or fill is at the grade level. Where crawl spaces exist, treat as described in point No. 1.

## BUILDINGS WITH CONCRETE SLAB

- The Apply I gained per the square square set as sun over-all treatment under the slab as well as sunder sattoched porches, entrance platforms, utility entrances and similar situations where slab or fill is at grade level.
- 2. Apply 2 gallons per 5 linear feet to critical areas under the slab. Treatment should be made along the inside of foundation wolls, around newer pipes, conducts, atc. Trench as in point No 3 below. 5 5 2 2 2 25
- 3. Along the outside of foundation walls, die a narrow trench no deeper than the top of the footings, but no deeper than 15 inches. Apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a layer of soil.

#### **BUILDINGS WITH BASEMENTS**

- 1. Apply 1 gallon per 10 square feet as an over-all treatment under the basement flooring, as well as under attached porches, entrance platforms, utility entrances, and similar situations where slab fill is at the grade level. Where crawl spaces exist, treat as described in point No. 2 below.
- 2. Apply 2 gallons per 5 linear feet to critical areas under the basement floorings, as well as porches and entrances having crawl spaces. Treatment should be made along the inside of foundation walls, around sewer pipes, conduits, piers, etc. Trench according to directions in point No. 2, Buildings with Crawl Spaces.
- 3. For the outside of foundation walls, treat the same way as described in point No. 2, Buildings with Crawl Spaces.
- 4. Drill between courses of concrete block to treat foundation voids.



CHI

ACTIVE ING

7-Metho

Kerosene ...

WARNING
Avoid breat
contaminate
soil and gras
This product
body of wat
when weath

This product may be obt

this product

WAI

fluid is clear